

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- - -

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

ES

00


A2

ECR-14-005789



19MAR14

T.Q


W.H




2 POSITION

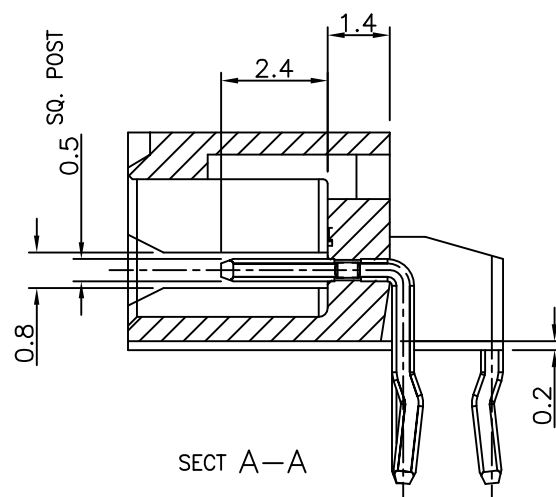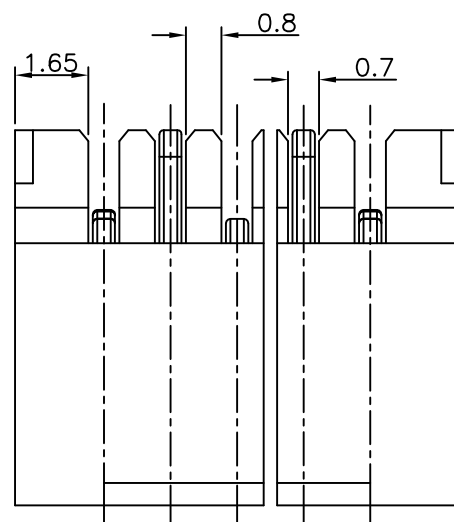


SECT A-A

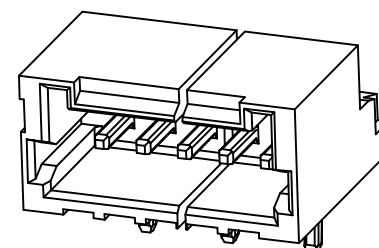


TRADE MARK

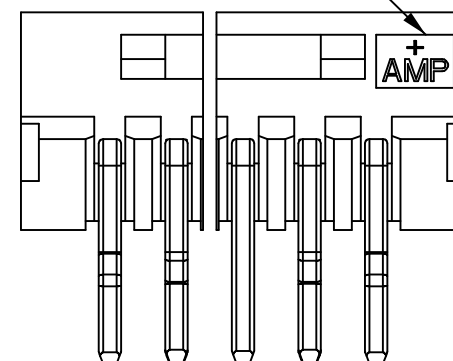



VIEW B




GATING RECESS

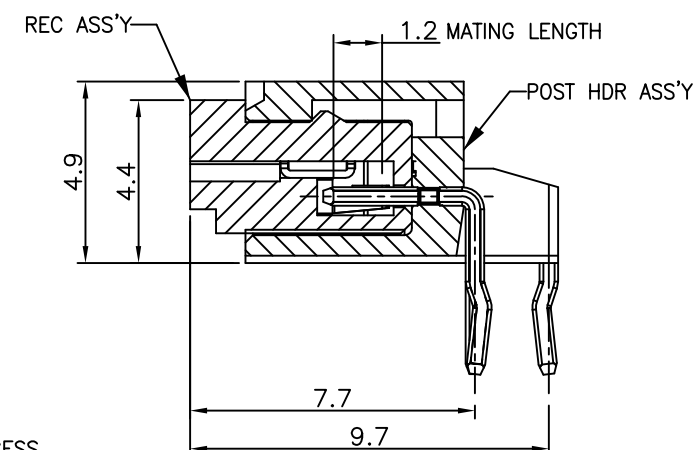

MATING SECTION

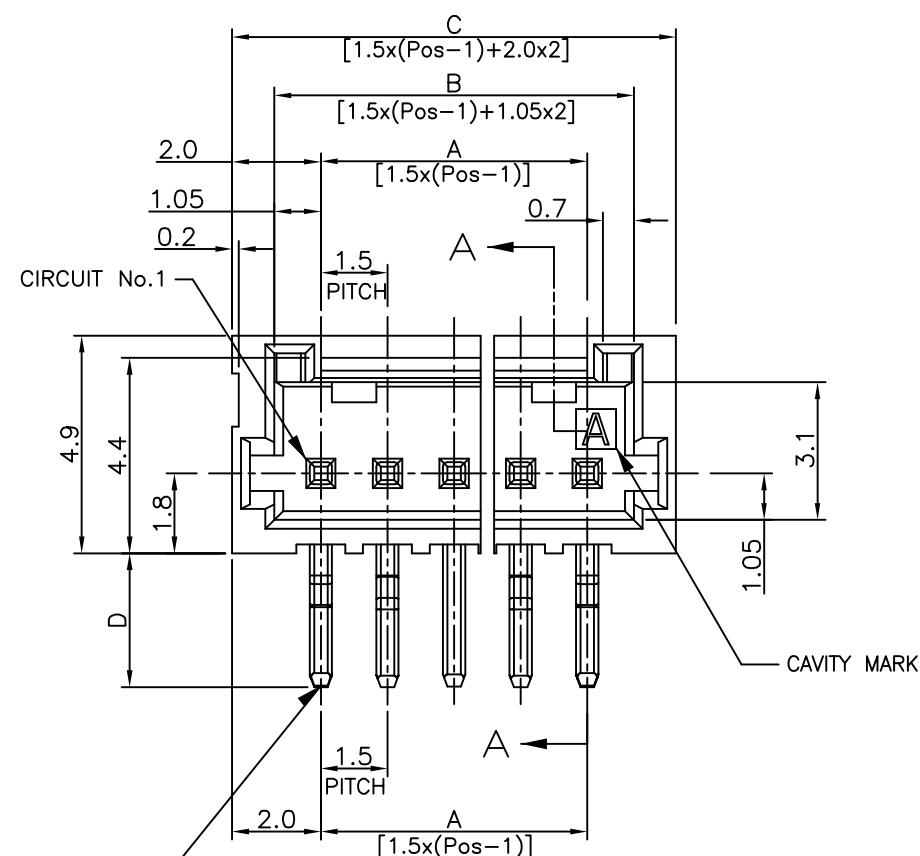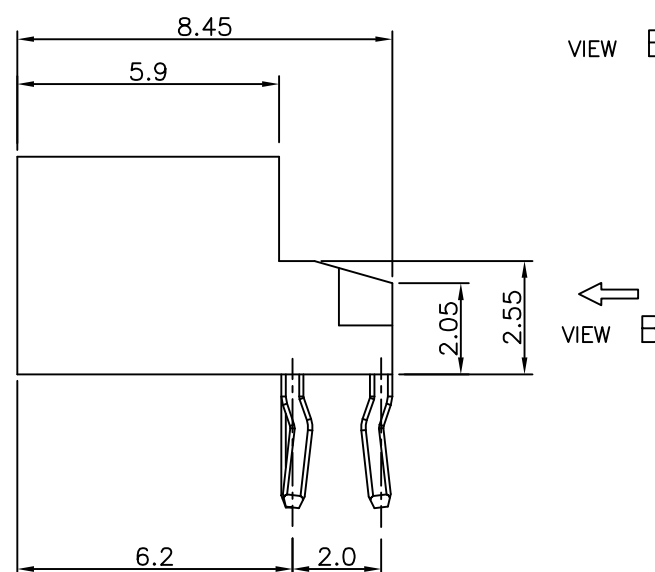KINKING FORMING
BOTH SIDE EACH 2 PLACES
TOTAL: 4 PLACES

VIEW B

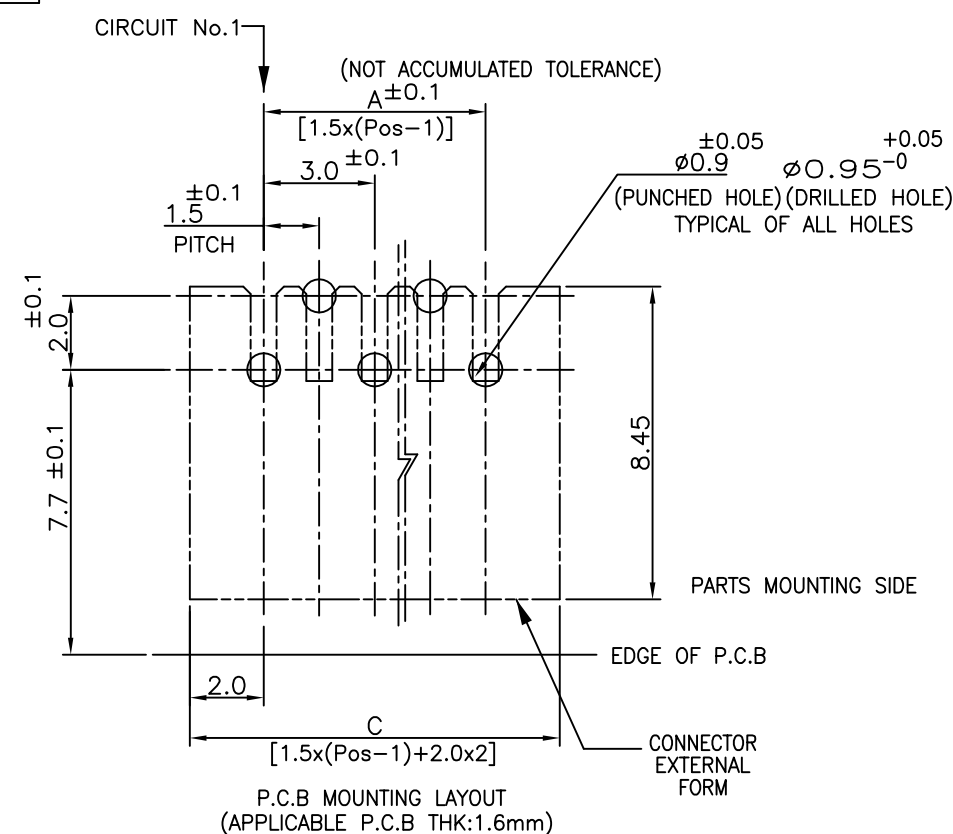

NOTES:


1.MATERIAL:

HOUSING:NYLON(G.F.) UL94V-0,COLOR:GRAY,BLUE
POST:PRE-TIN 0.5mm SQ. BRASS WIRETOLERANCES UNLESS
OTHERWISE SPECIFIED:10 > * : ±0.2
30 > * >10 : ±0.25
100 > * >30 : ±0.3
ANGLE : ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

MM



MATERIAL

SEE NOTE 1

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

FINISH

SEE NOTE 1

DWN 06DEC02

S.YAO

CHK 31JAN03

T.SASAKI

APVD 31JAN03

T. SASAKI

PRODUCT SPEC

108-60018

APPLICATION SPEC

114-5223

WEIGHT

SEE TABLE

CUSTOMER DRAWING



TE Connectivity

NAME
AMP Mini CT Connector 1.5mm Pitch
Single Row HDR Ass'y (H) DIP Staggered Type with Kink

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=292206



SCALE NON


SHEET

1 of 2

REV A2

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

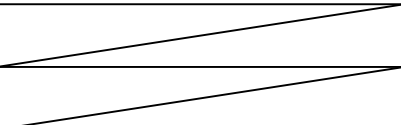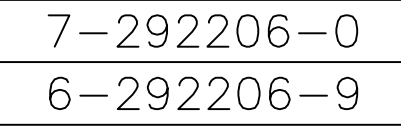0.28	2.5	8.5	6.6	4.5	4		9-292206-4
0.23	2.5	7.0	5.1	3.0	3		9-292206-3
1.11	3.0	32.5	30.6	28.5	20	7-292206-0	2-292206-0
1.06	3.0	31.0	29.1	27.0	19	6-292206-9	1-292206-9
1.01	3.0	29.5	27.6	25.5	18	6-292206-8	1-292206-8
0.96	3.0	28.0	26.1	24.0	17	6-292206-7	1-292206-7
0.91	3.0	26.5	24.6	22.5	16	6-292206-6	1-292206-6
0.86	3.0	25.0	23.1	21.0	15	6-292206-5	1-292206-5
0.81	3.0	23.5	21.6	19.5	14	6-292206-4	1-292206-4
0.75	3.0	22.0	20.1	18.0	13	6-292206-3	1-292206-3
0.70	3.0	20.5	18.6	16.5	12	6-292206-2	1-292206-2
0.65	3.0	19.0	17.1	15.0	11	6-292206-1	1-292206-1
0.60	3.0	17.5	15.6	13.5	10	6-292206-0	1-292206-0
0.54	3.0	16.0	14.1	12.0	9	5-292206-9	292206-9
0.49	3.0	14.5	12.6	10.5	8	5-292206-8	292206-8
0.44	3.0	13.0	11.1	9.0	7	5-292206-7	292206-7
0.40	3.0	11.5	9.6	7.5	6	5-292206-6	292206-6
0.34	3.0	10.0	8.1	6.0	5	5-292206-5	292206-5
0.29	3.0	8.5	6.6	4.5	4	5-292206-4	292206-4
0.24	3.0	7.0	5.1	3.0	3	5-292206-3	292206-3
0.19	3.0	5.5	3.6	1.5	2	5-292206-2	292206-2
WEIGHT (g)	D	C	B	A	Pos.	BLUE	GRAY
	DIMENSIONS					PART NO	

DIMENSIONS:		DWN	MATERIAL		FINISH	
mm		CHK	 TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD				
		PRODUCT SPEC				
0 PLC ± -		APPLICATION SPEC	NAME AMP Mini CT Connector 1.5mm Pitch Single Row Post HDR Ass'y (H) DIP Staggered Type with Kink			
1 PLC ± SEE SHEET						
2 PLC ± 1 OF 2		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
3 PLC ± -			A4	00779	C=292206	-
4 PLC ± -						
ANGLES ± -						
		CUSTOMER DRAWING			SCALE	SHEET
					-	2 OF 2
						REV A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-292206-9](#)