



10 9 8 7 6 5 4 3 2 1

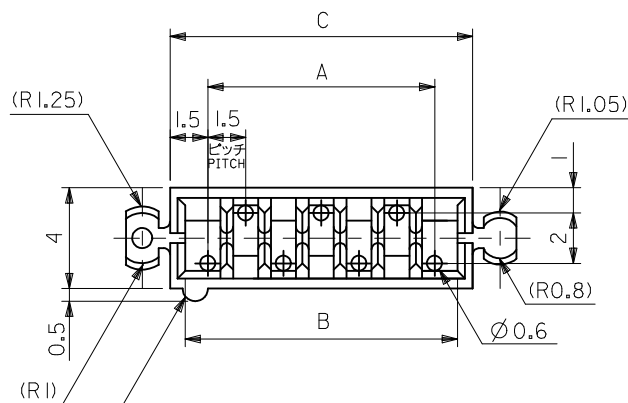


回路NO. 1側
表示用突起
CKT. NO.1
EMBOSSED INDICATION

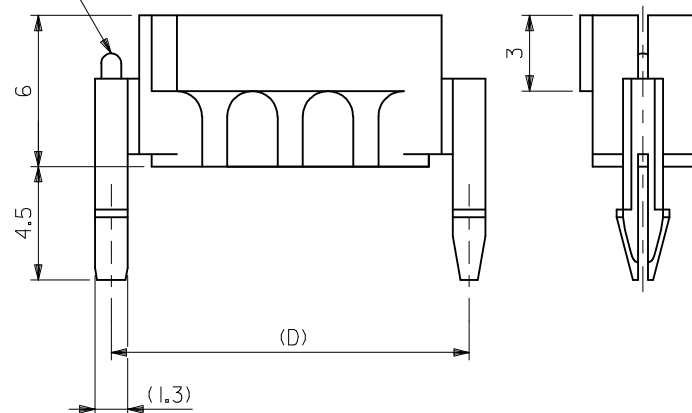


(注記)
(NOTES)

1. 材質:MATERIAL
66ナイロン, UL94V-2
NYLON66, UL94V-2


2. 適用電線: APPLICABLE WIRE
1. 5mmピッチリボンケーブル
1.5mm PITCH RIBON CABLE
(UL2468, AWG#26 鍍コート線)
(UL2468, AWG26 TIN TOP COAT WIRE)

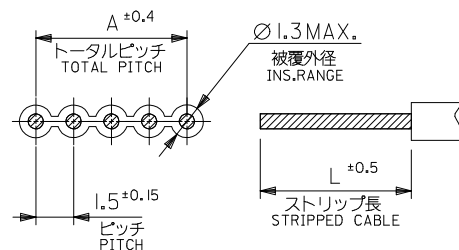

適合電線推奨寸法
APPLICABLE WIRE RECOMMENDED DIM.

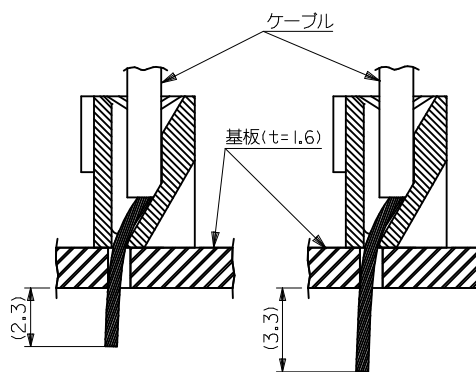

ストリップ長L=6mmの
ケーブルを挿入した場合
L=6mm STRIPPED CABLE
INSERTION FIGURE
ストリップ長L=7mmの
ケーブルを挿入した場合
L=7mm STRIPPED CABLE
INSERTION FIGURE

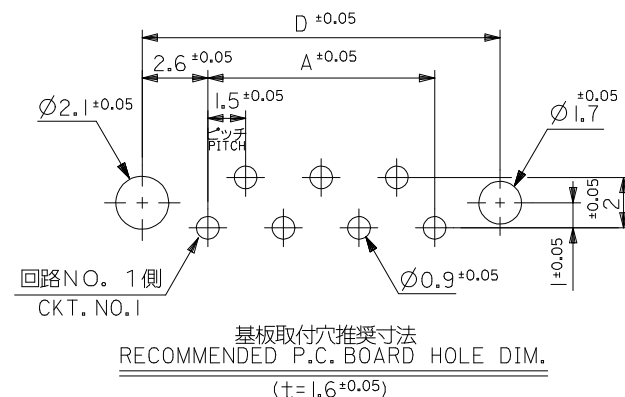

29.2	27	25.8	24	-1700	17
26.2	24	22.8	21	-1500	15
24.7	22.5	21.3	19.5	-1400	14
23.2	21	19.8	18	-1300	13
21.7	19.5	18.3	16.5	-1200	12
20.2	18	16.8	15	-1100	11
18.7	16.5	15.3	13.5	-1000	10
17.2	15	13.8	12	-0900	9
15.7	13.5	12.3	10.5	-0800	8
14.2	12	10.8	9	-0700	7
12.7	10.5	9.3	7.5	-0600	6
11.2	9	7.8	6	-0500	5
9.7	7.5	6.3	4.5	-0400	4
8.2	6	4.8	3	51016-0300	3
D	C	B	A	PLASTIC BAG	CIRCUIT
				ORDER No. オーダー番号	極数

REVISED EC NO: J2016-0744 2016/01/18 DRWN: QHE31 CHKD: SAKIYAMA APPR: IKANEKO 2016/01/27	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		10 UNDER	±0.2	DRAWN BY C. ARIZONO	DATE '09/03/30	TITLE 1.5MM PITCH CABLE HOLDER(ST.)  MOLEX INCORPORATED		
		10 OVER 30 UNDER	±0.25	CHECKED BY T. HARUYAMA	DATE '09/03/30			
		30 OVER	±0.3	APPROVED BY N. UKITA	DATE '09/03/30			
		ANGULAR	±3 °	MATERIAL NO.				
	G	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-51016-001	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[51016-1200](#) [51016-1100](#) [51016-1400](#)