

CABLE, ELECTRIC, RADIATION-CROSSLINKED, EXTRUDED, MODIFIED, FLUOROPOLYMER-INSULATED,  
FIVE CONDUCTOR, SHIELDED, JACKETED, MEDIUM WEIGHT

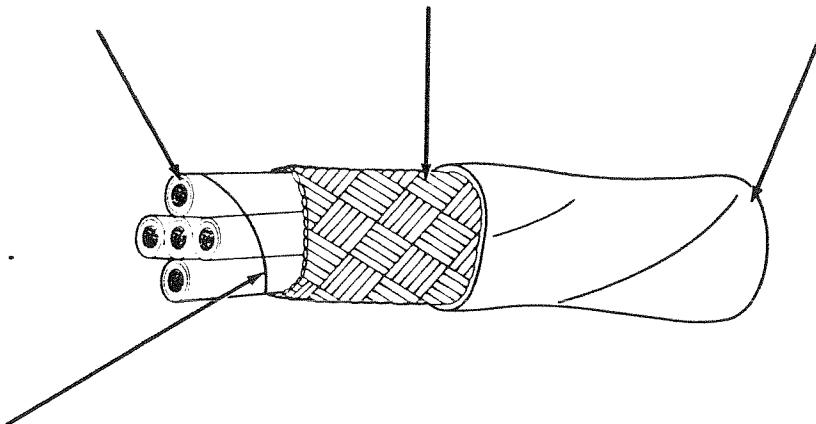
7 November 1983

150°C

The complete requirements for procuring the cable described herein shall consist of this document and the issue in effect of Raychem Specification 55A.

COMPONENT WIRES - 55A0211

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED,  
MODIFIED ETFEFILAMENT BINDER  
AS REQUIRED

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (1b/1000 ft.)
			MINIMUM	NOMINAL 1/	NOMINAL 1/	MAXIMUM	
55A1251-26-*	26	38	.006	.008	.125	.142	15.2
55A1251-24-*	24	38	.006	.008	.138	.158	19.2
55A1251-22-*	22	38	.006	.008	.155	.176	25.0
55A1251-20-*	20	38	.006	.008	.176	.202	34.6
55A1251-18-*	18	38	.006	.008	.203	.222	47.8
55A1251-16-*	16	38	.007	.009	.227	.260	59.6
55A1251-14-*	14	38	.007	.009	.273	.314	87.0
55A1251-12-*	12	38	.008	.010	.323	.373	126.

1/ Nominal values are for information only. Nominal values are not requirements.

## CABLE RATINGS AND ADDITIONAL REQUIREMENTS

## TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

## VOLTAGE RATING: 600 volts (rms)

ACCELERATED AGING: 300 ± 3°C for 7 hours

BLOCKING: 200 ± 3°C for 6 hours

DIELECTRIC WITHSTAND: 1500 volts, 60 Hz

## FLAMMABILITY:

Procedure 1, 3 seconds (maximum); 3 in. (maximum);  
no flaming of facial tissue

JACKET COLOR: White preferred

## JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 psi (minimum)

## JACKET FLAWS:

Spark Test, 1000 volts, 60 Hz (rms), 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100% test

LIFE CYCLE: 200 ± 3°C for 168 hours

LOW TEMPERATURE-COLD BEND: -65 ± 3°C for 4 hours

SHIELD COVERAGE: 85% (minimum)

THERMAL SHOCK: 300 ± 3°C for 6 hours

VOLTAGE WITHSTAND TEST: (After Accelerated Aging,  
Immersion, Life Cycle, Low Temperature-Cold Bend and  
Thermal Shock) 1000 volts, 60 Hz, 1 minute

## PART NUMBER:

The \*\* in the part numbers above shall be replaced by  
color code designators in accordance with MIL-STD-681  
with slashes separating component wire colors and a  
dash separating the component wire colors from the  
jacket color.

## Example:

AWG 20; white, black, red, blue and green component  
wires; white jacket: 55A1251-20-9/0/2/6/5-9.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55A1251-22-G102-9CS1866](#)