

Surface Mount GaAs Tuning Varactors 0.75, 1.25, & 1.5 Gamma Hyperabrupt

Rev. V8

Features

- Gamma Hyperabrupt Junctions: 0.75, 1.25 and 1.5
- Surface Mount Packages
- Very High Quality Factor
- Capacitance Ratio to 10:1
- Case Style 1056 is Hermetic and may be Screened to JANTX levels
- Tape and Reel Packaging Available

Description


MACOM offers three families of low cost surface mount gallium arsenide tuning varactors. All families have silicon nitride protected junctions for low leakage current and high reliability.

The **MA46H070** through **MA46H073** family has hyperabrupt junctions with constant gamma of 0.75 from 0 to 20 volts and very high quality factor approaching that of abrupt junction varactors, but higher capacitance change versus tuning voltage. These diodes are very well suited for narrow bandwidth VCOs and VTFs where wide tuning range and very high quality factor are required.


The **MA46H200** through **MA46H204** family has hyperabrupt junctions with constant gamma of 1.25 from 2 to 20 volts and has the largest capacitance ratio of the families of GaAs varactors and high quality factor. These diodes are very well suited for wide bandwidth VCOs and VTFs where the optimum combination of very wide tuning range and high quality factor is required.

The **MA46H500** through **MA46H504** family has hyperabrupt junctions with constant gamma of 1.5 from 2 to 12 volts and high quality factor. Designed for wide bandwidth VCOs and VTFs where limited bias voltage is available. These varactors have lower quality factor than the other families of GaAs varactors.

Common Case styles

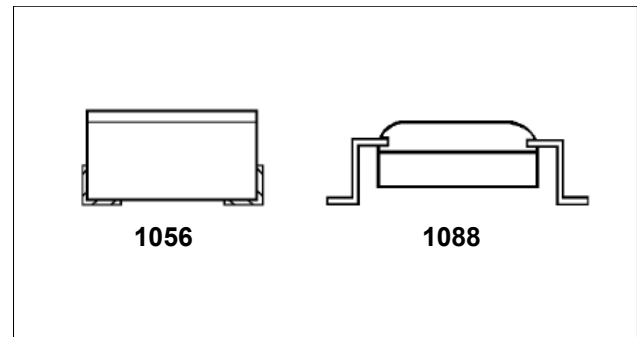

Packaged Tuning Varactor Equivalent Circuit

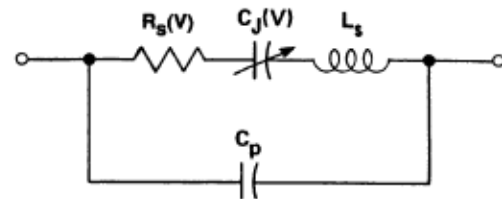

Absolute Maximum Ratings^{1,2}

| Parameter | Absolute Maximum | |
|-----------------------|--|-----------------|
| | Case 1056 | Case 1088 |
| Operating Temperature | -65°C to +150°C | -65°C to +125°C |
| Storage Temperature | -65°C to +200°C | -65°C to +125°C |
| Reverse Voltage | Breakdown Voltage | |
| Forward Current | 50 mA @ 25°C | |
| Power Dissipation | 50 mW @ 25°C, de-rate linearly to 0 mW @ maximum operating temperature | |

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. MACOM does not recommend sustained operation near these survivability limits.

Electrical Specifications: $T_A = +25^\circ\text{C}$

0.75 Gamma Hyperabrupt

Breakdown Voltage @ 10 μA = 20 V minimum
 Reverse Current @ 16 V = 100 nA maximum
 Gamma³ = 0.68 - 0.83, VR = 0 to 20 V @ 10 μA

| Part Number | Total Capacitance +/-10% ^{4,5,6} | Total Capacitance Ratio ⁶ | Q Minimum |
|-------------|--|---|--------------|
| | Vr=4 V | Vr=0 V | Vr=4 V |
| | (pF) | - | - |
| MA46H070 | 0.5 - 0.7 | 5.5 | 4500 |
| MA46H071 | 0.9 - 1.1 | 6.4 | 4500 |
| MA46H072 | 2.7 - 3.3 | 7.5 | 3000 |
| MA46H073 | 4.5 - 5.5 | 7.5 | 2200 |

1.25 Gamma Hyperabrupt

Breakdown Voltage @ 10 μA = 22 V minimum
 Reverse Current @ 16 V = 100 nA maximum
 Gamma³ = 1.13 - 1.38, VR = 2 to 20 V @ 10 μA

| Part Number | Total Capacitance +/-10% ^{4,5,6} | Total Capacitance Ratio ⁶ | Q Minimum |
|-----------------------|--|---|--------------|
| | Vr=4 V | Vr=2 V | Vr=4 V |
| | (pF) | - | - |
| MA46H200 | 0.5 - 0.7 | 3.0 | 1500 |
| MA46H201 | 0.9 - 1.1 | 4.1 | 3000 |
| MA46H202 ⁷ | 2.7 - 3.3 | 5.6 | 2000 |
| MA46H203 | 4.5 - 5.5 | 10.0 | 1500 |
| MA46H204 | 9.0 - 11.0 | 10.0 | 1500 |

1.5 Gamma Hyperabrupt


Breakdown Voltage @ 10 μA = 18 V minimum
 Reverse Current @ 14 V = 100 nA maximum
 Gamma³ = 1.4 - 1.6, VR = 2 to 12 V @ 10 μA

| Part Number | Total Capacitance +/-10% ^{4,5,6} | Total Capacitance Ratio ⁶ | Q Minimum |
|-------------|--|---|--------------|
| | Vr=4 V | Vr=2 V | Vr=4 V |
| | (pF) | - | - |
| MA46H500 | 0.5 - 0.7 | 2.8 | 2500 |
| MA46H501 | 0.9 - 1.1 | 3.9 | 2500 |
| MA46H503 | 4.5 - 5.5 | 8.1 | 1200 |
| MA46H504 | 9.0 - 11.0 | 8.1 | 1200 |


- The values guaranteed for gamma are measured on unpackaged chips. The total capacitance versus bias voltage curve will deviate slightly from the chip capacitance versus bias voltage curve due to the package parasitic capacitance (Cp).
- The Cp values listed typically have tolerances of ± 0.02 pF.
- Capacitance is measured at 1 MHz.
- The total capacitance and capacitance ratios shown are for diodes housed in case style 30. Other case styles will result in different values.
- When ordering MA46H202-134 as whole wafer P/N is MAVR-0046202-0134WR.

Typical Performance Curves


0.75 Gamma Hyperabrupt

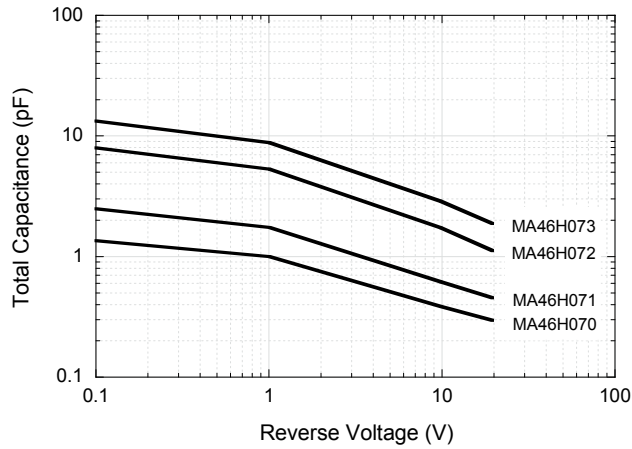



1.25 Gamma Abrupt

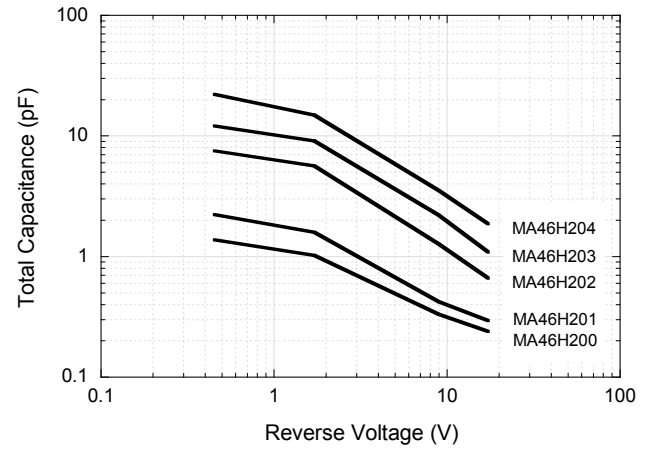

1.5 Gamma Hyperabrupt

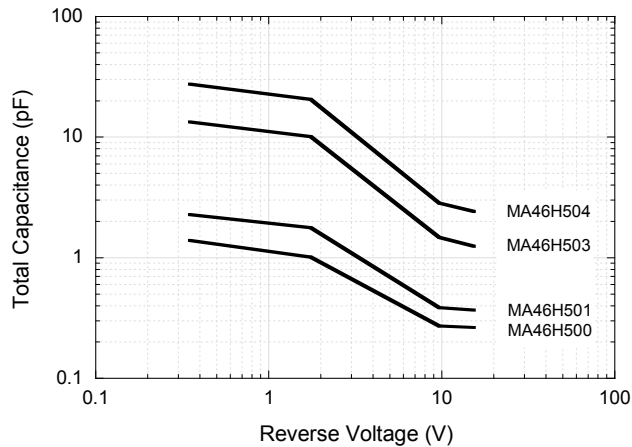


Temperature Coefficient of Capacitance in PPM/°C vs. Reverse Voltage

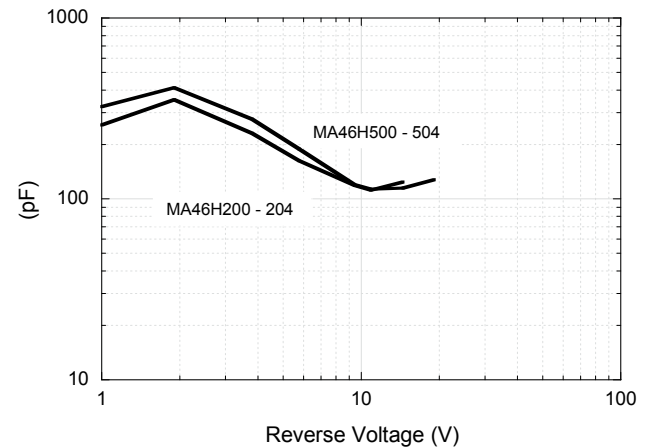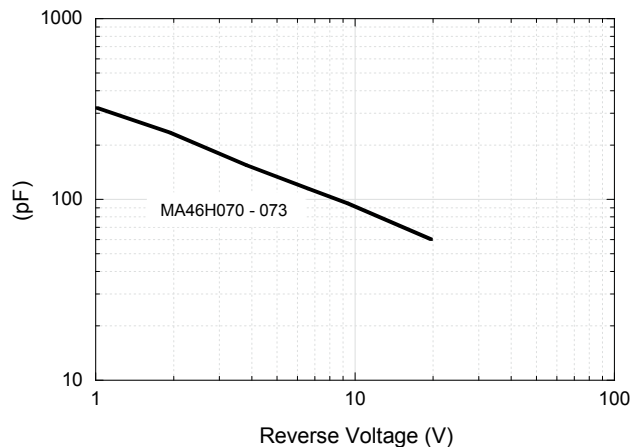

Case Styles


ODS-1056

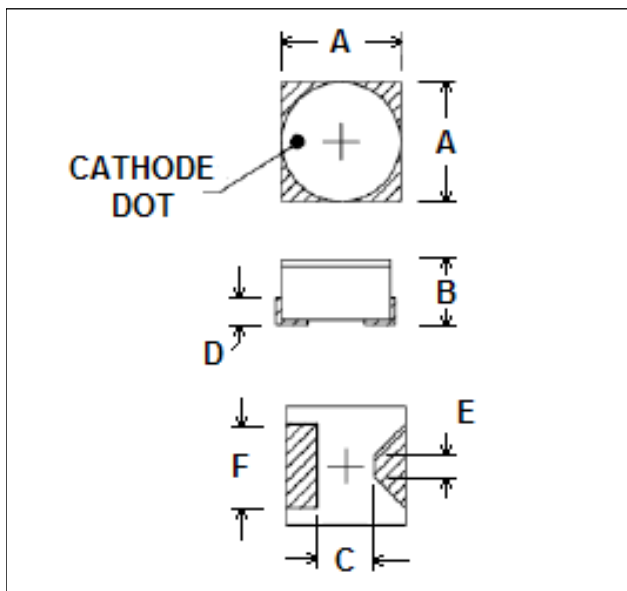

| DIM. | INCHES | | MILLIMETERS | |
|------|--------|-------|-------------|------|
| | MIN. | MAX. | MIN. | MAX. |
| A | 0.065 | 0.075 | 1.65 | 1.91 |
| B | 0.034 | 0.041 | 0.86 | 1.04 |
| C | 0.030 | 0.036 | 0.76 | 0.91 |
| D | 0.009 | 0.021 | 0.23 | 0.53 |
| E | 0.010 | 0.014 | 0.25 | 0.36 |
| F | 0.043 | 0.053 | 1.09 | 1.35 |

Package Capacitance: 0.15 pF Typical
Package Inductance: 0.45 nH Typical

ODS-1088

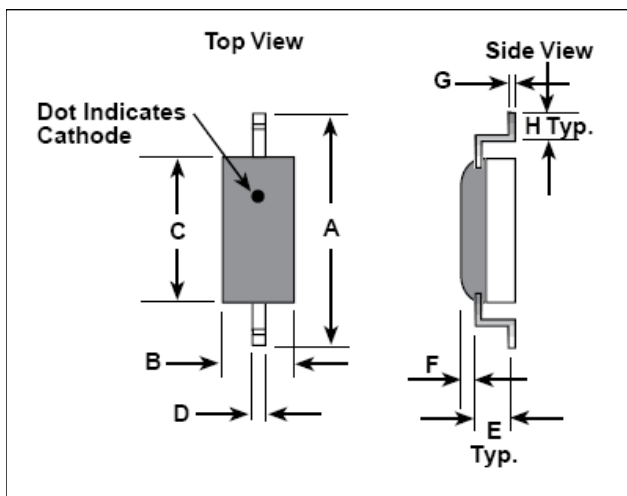

| DIM. | INCHES | | MILLIMETERS | |
|------|--------|-------|-------------|------|
| | MIN. | MAX. | MIN. | MAX. |
| A | 0.175 | 0.195 | 4.44 | 4.95 |
| B | 0.040 | 0.050 | 1.02 | 1.27 |
| C | 0.085 | 0.095 | 2.16 | 2.41 |
| D | 0.015 | 0.025 | 0.38 | 0.64 |
| E | 0.010 | 0.015 | 0.25 | 0.38 |
| F | 0.015 | 0.020 | 0.38 | 0.51 |
| G | 0.004 | 0.006 | 0.10 | 0.15 |
| H | 0.020 | 0.030 | 0.51 | 0.76 |
| J | 0.013 | 0.033 | 0.33 | 0.84 |
| K | 0.003 | 0.005 | 0.08 | 0.13 |

Ordering Information

These GaAs tuning varactors are available in either case style as shown. When ordering, specify the desired case style by adding the case designation as a suffix to the model number. For example, a MA46H200-1088 specifies a 1.25 gamma hyperabrupt tuning diode in case style 1088.

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.