



SECTION A-A

IMPEDANCE ( Z )			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	60 Ω	135 Ω	285 Ω
Minimum	- Ω	108 Ω	- Ω

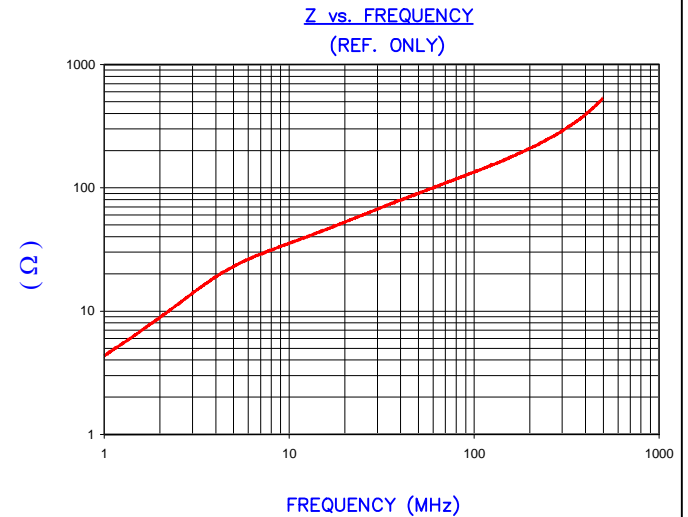

**UNCONTROLLED DOCUMENT**



DETAIL "A"  
SCALE 3:1



NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

FERRITE CORE DIMENSIONS (SPEC):mm [Inches]

BARE DIMENSIONS		28B2400-000	
A	60.96 [2.400]	+	1.22 [.048]
B	35.56 [1.400]	+	0.71 [.028]
C	12.70 [.500]	+	0.38 [.015]

WEIGHT/1000 109.37 kgs [241.12 Lbs]

DIMENSIONS ARE IN MM [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.				
REV	DESCRIPTION	DATE	INT					
J	UPDATE COMPANY LOGO	05/22/15	QIU	PROJECT/PART NUMBER: <b>28B2400-000</b>		REV	J	DRAWN BY: DJB
H	UPDATE Z SPECS AND COMPANY LOGO	06/25/04	JRK			DATE: 07/03/90	SCALE: .75:1	MATERIAL: FERRITE
G	CHG P/N FROM 00*, REMOVE COATING SPECS	06/25/04	JRK	CAD # 28B2400-000-J	TOOL # B2400			
F	UPDATE COATING DIMS, REM FLAT from CHAMFER DETAIL, ADJUST R. DIM, UPDATE PART WGT. UPDATE Z SPECS	10/15/03	JRK					
E	UPDATE FORMAT & Z SPECS, CURVE&TOLS	07/23/03	JRK					
REV	DESCRIPTION	DATE	INT					

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Laird Performance Materials:](#)

[28B2400-000](#)