





LOC		DIST		REVISIONS				
GP	00	P	LYR	DESCRIPTION	DATE	OWN	APVD	
				B	REVISED PER ECO-09-022874	20OCT2009	CR	MS
				C	REVISED PER ECO-11-024172	07DEC2011	TX	AC

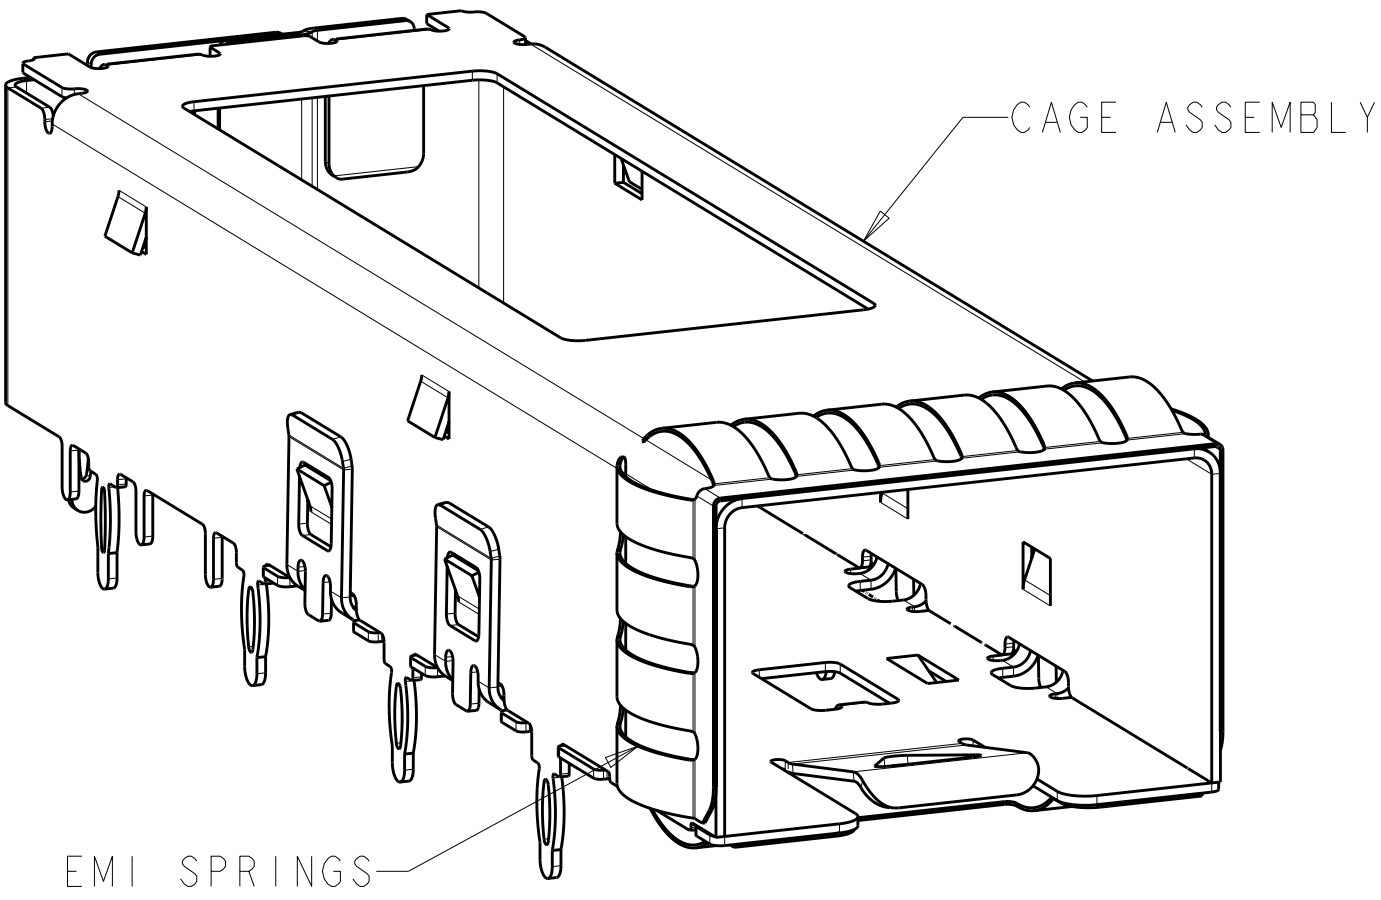


2007215-2
SCALE 5:1

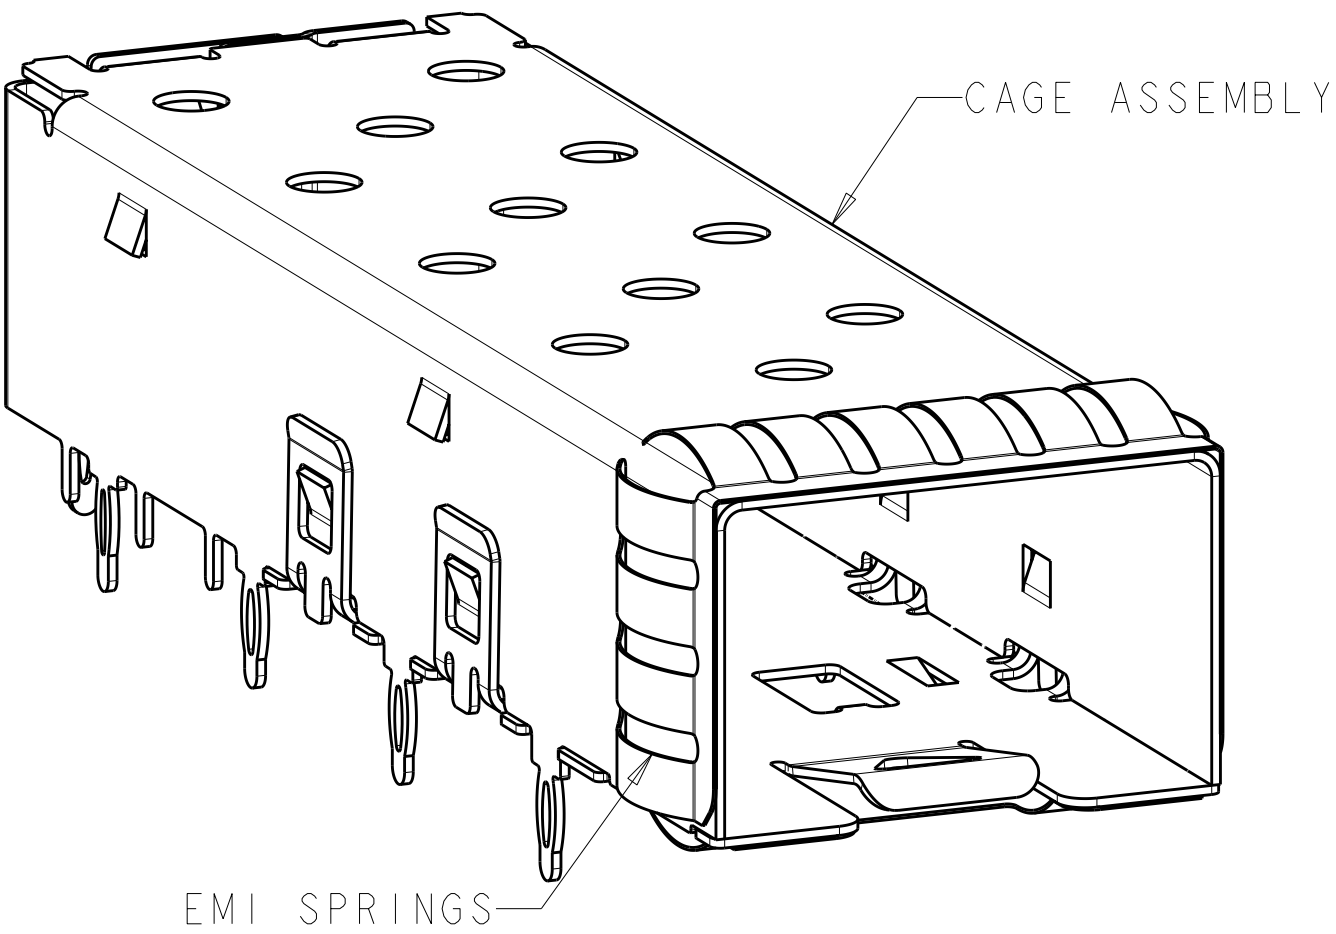

2007215-1
SCALE 5:1

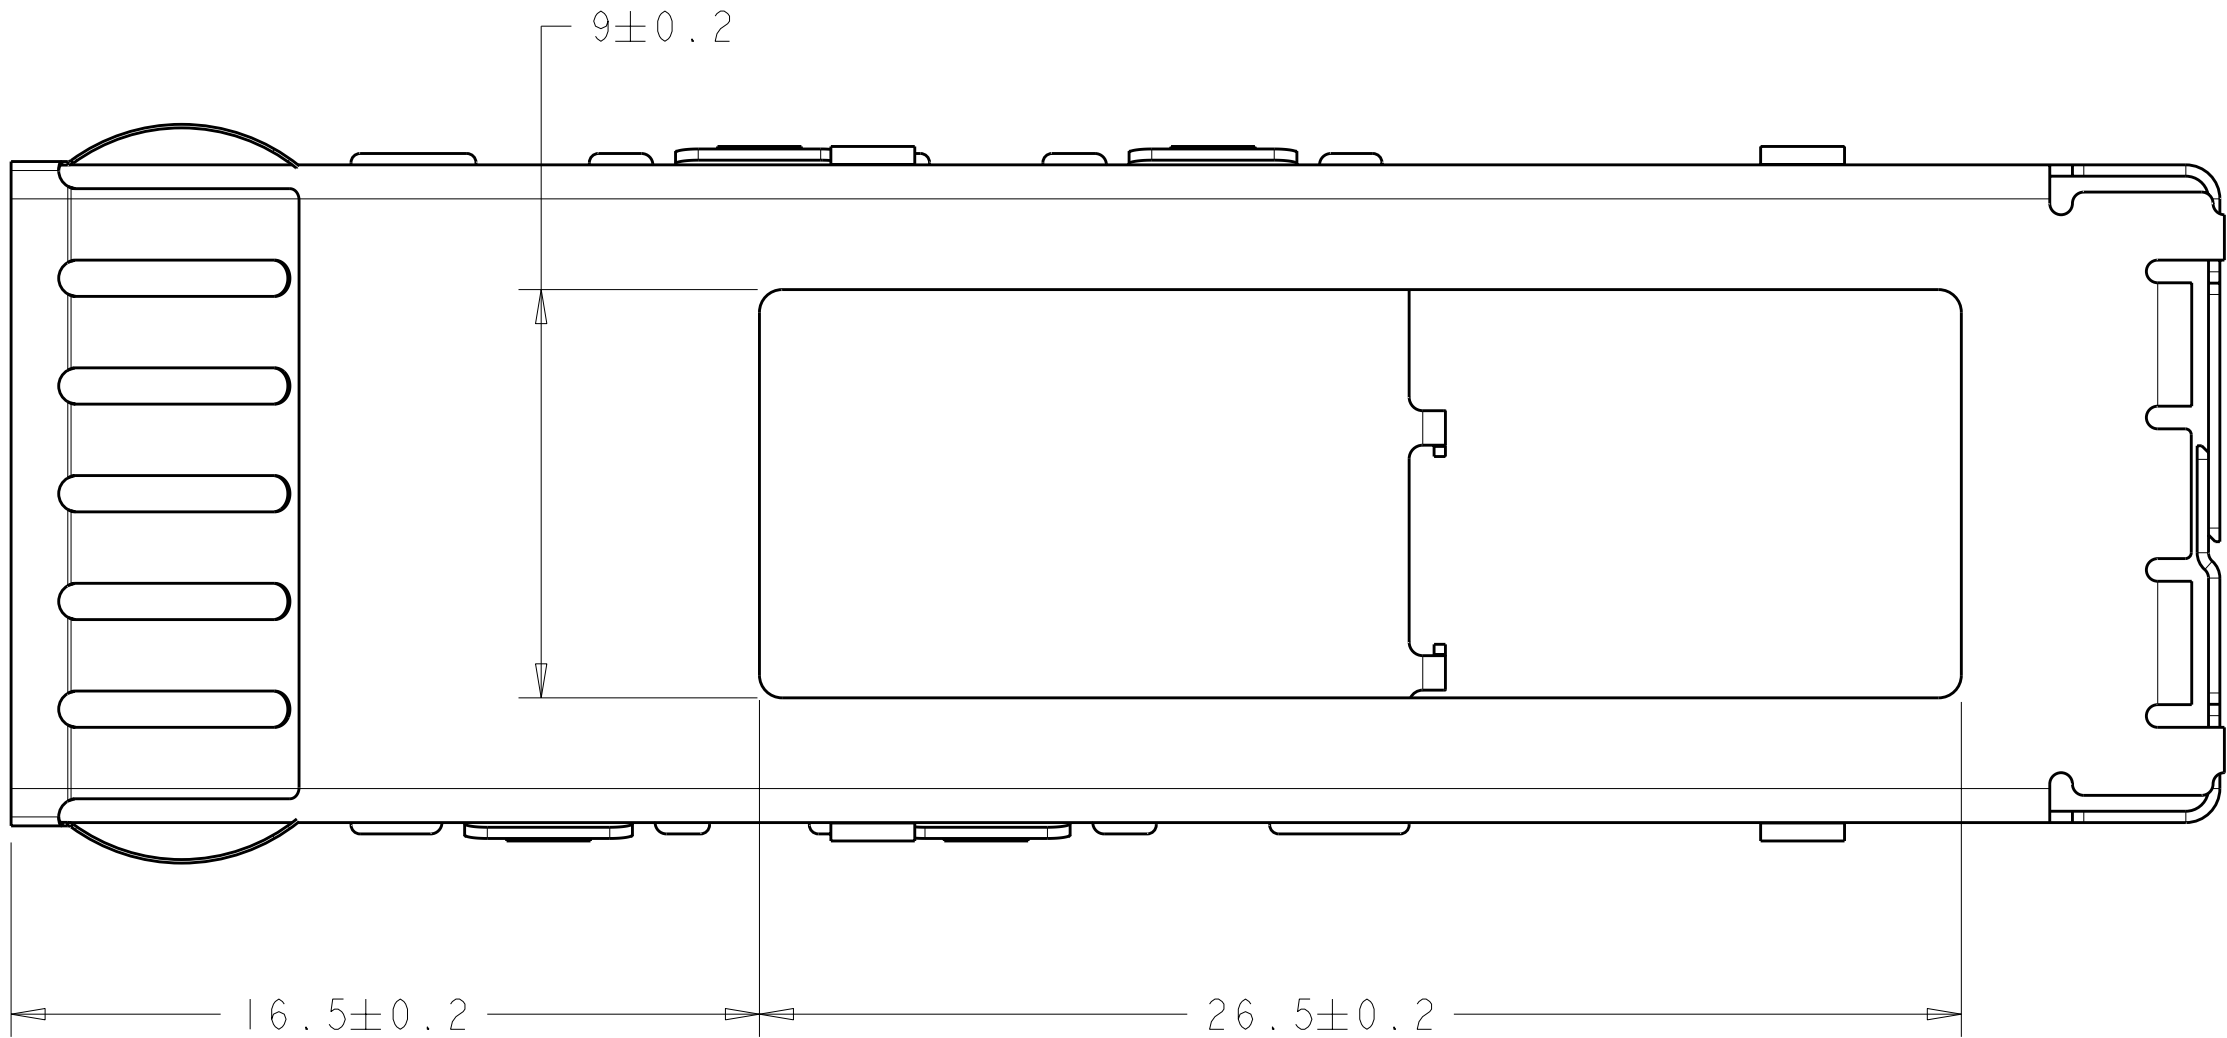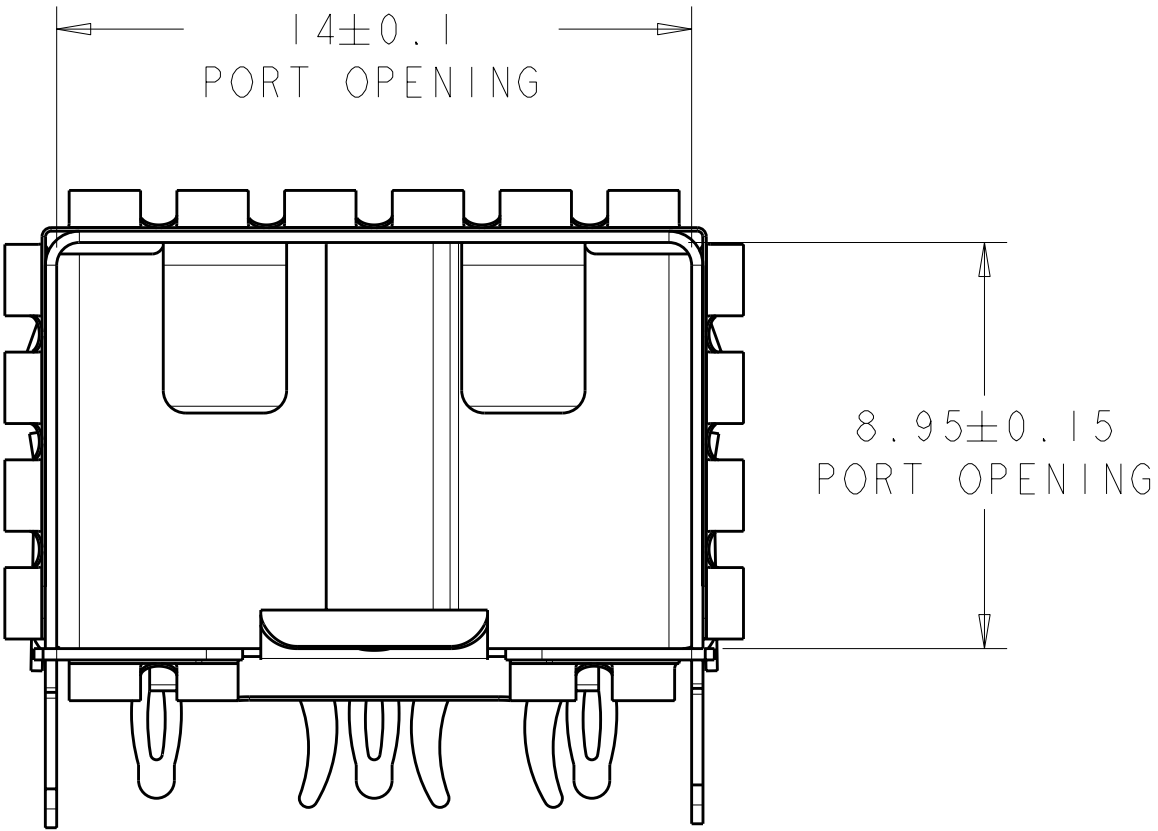


2007215-2
SAME AS 2007215-1 EXCEPT AS SHOWN
TOP VIEW

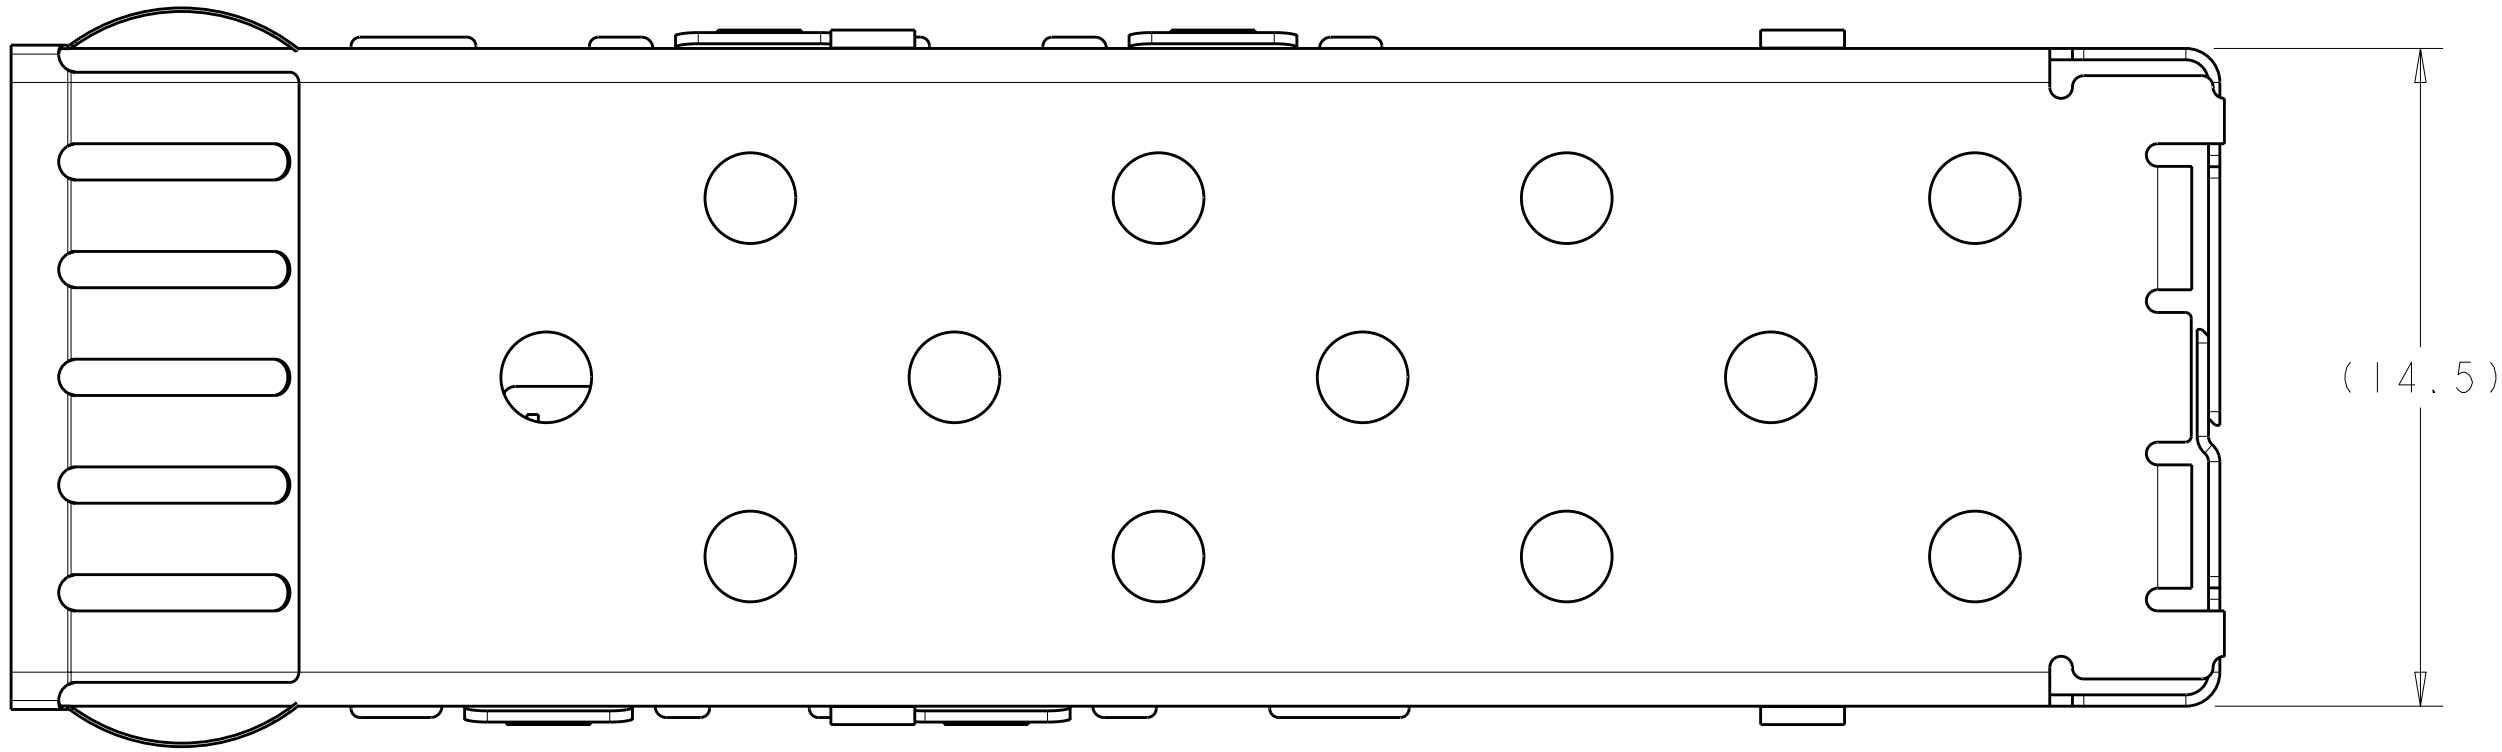


2007215-1
TOP VIEW

APPROXIMATE LOCATION
OF DATE CODE LABEL

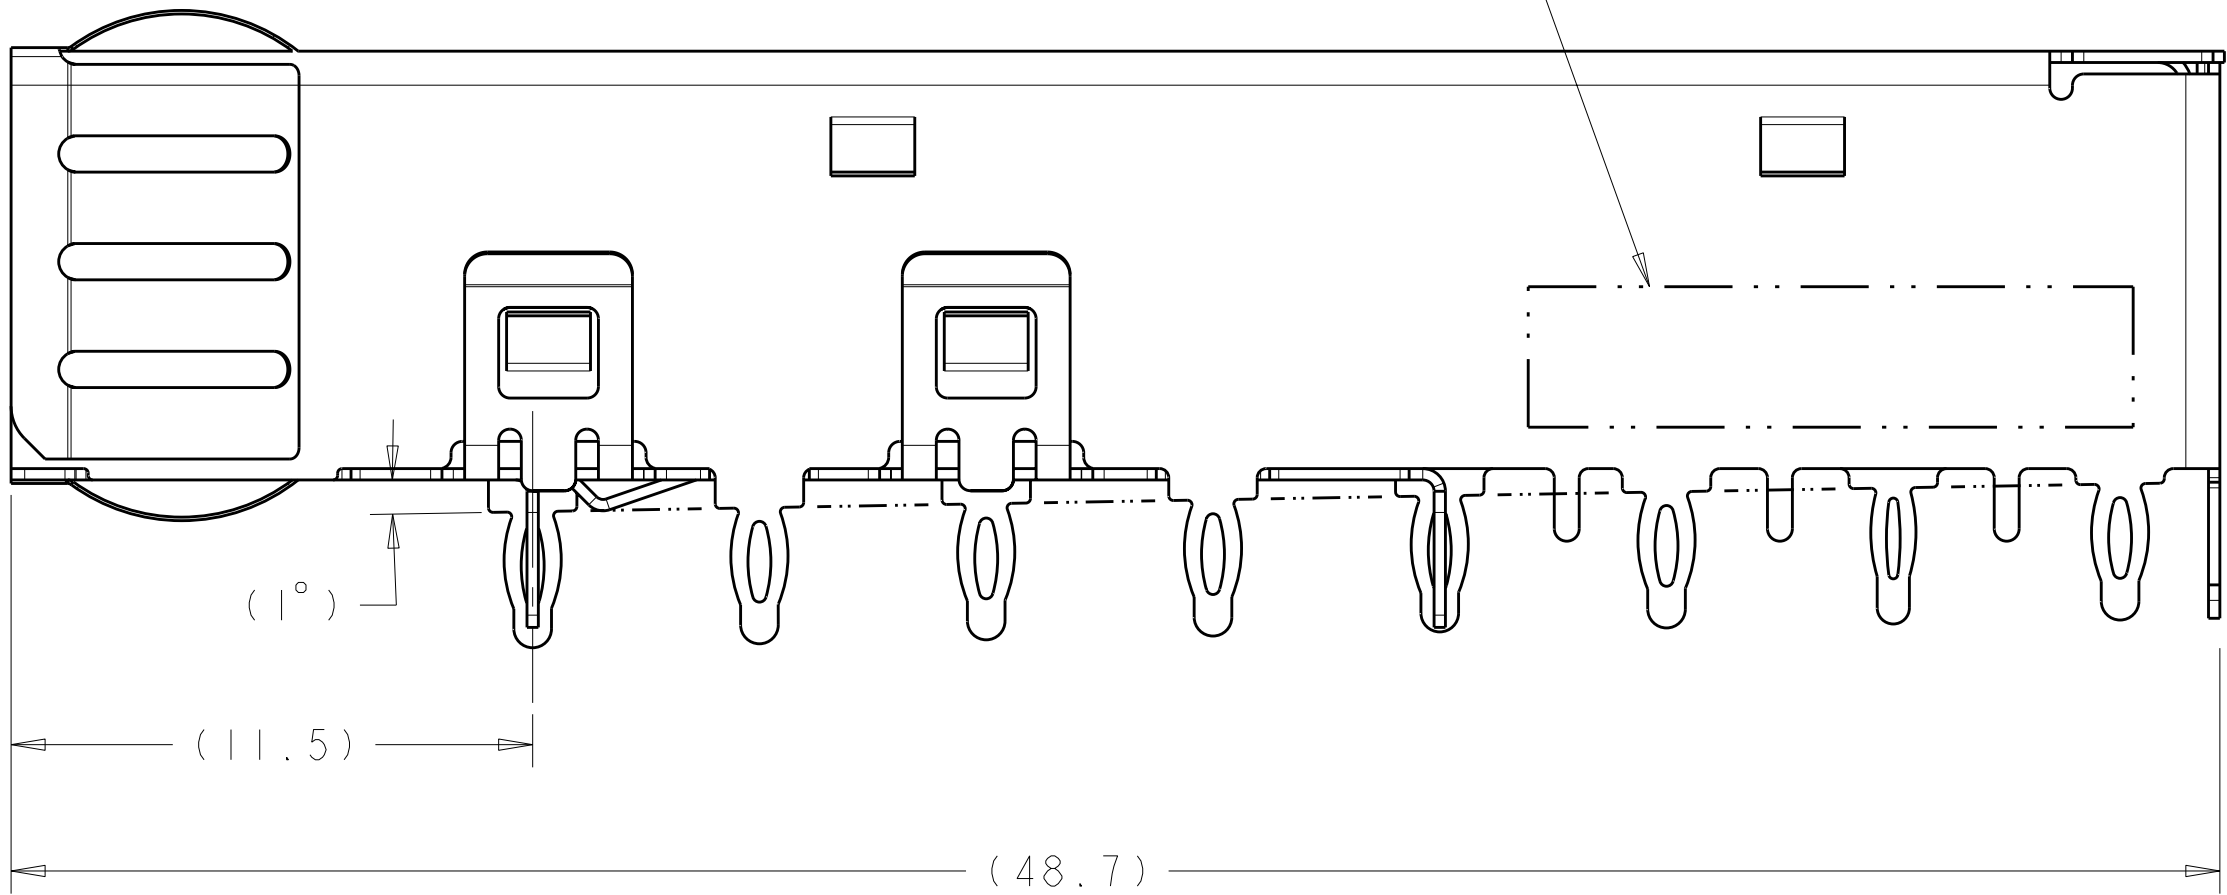


- 1 MATERIAL:
CAGE ASSEMBLY - 0.25mm THICK NICKEL-SILVER ALLOY.
EMI SPRINGS - COPPER ALLOY.
- 2 FINISH:
EMI SPRINGS - 0.8um MIN TIN OVER 0.8um MIN NICKEL,
NON PLATED EDGES PERMISSIBLE.
3. MATES WITH SFP MSA COMPLIANT TRANSCEIVERS.
- 4 PADS AND VIAS CHASSIS GROUND.
- 5 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
6. MINIMUM PC BOARD THICKNESS:
SINGLE SIDED = 1.50mm
- 7 REFERENCE APPLICATION SPEC. 114-13120, HOLE A,
FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING
THICKNESS.
- 8 REFERENCE APPLICATION SPEC. 114-13120, HOLE C,
FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING
THICKNESS.
9. NOTE DELETED

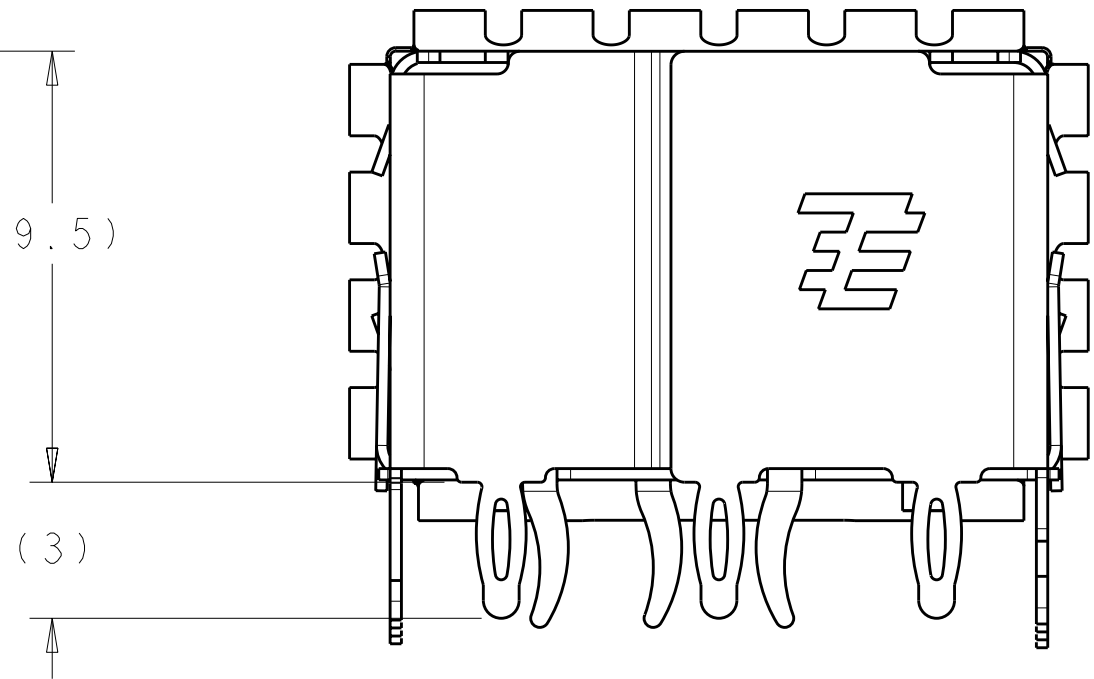

HEATSINK OPENING	2007215-2
EMI HOLES	2007215-1
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN M. SCHMITT 6AUG2007	 TE Connectivity			
DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.1 2 PLC ±0.1 3 PLC ±0.05 4 PLC ±0.05 ANGLES ±0.05 		CHK M. SCHMITT 6AUG2007				
		APVD B. WERTZ 6AUG2007				
		NAME SFP+ 1X1 CAGE ASSEMBLY, PCI, PRESS-FIT EMI SPRING FINGERS				
MATERIAL 		PRODUCT SPEC 108-2364 APPLICATION SPEC 114-13120		SIZE CAGE CODE DRAWING NO A100779C=2007215	RESTRICTED TO -	
		WEIGHT -				
		CUSTOMER DRAWING				
FINISH 		SCALE 6:1		SHEET 1	OF 2	REV C

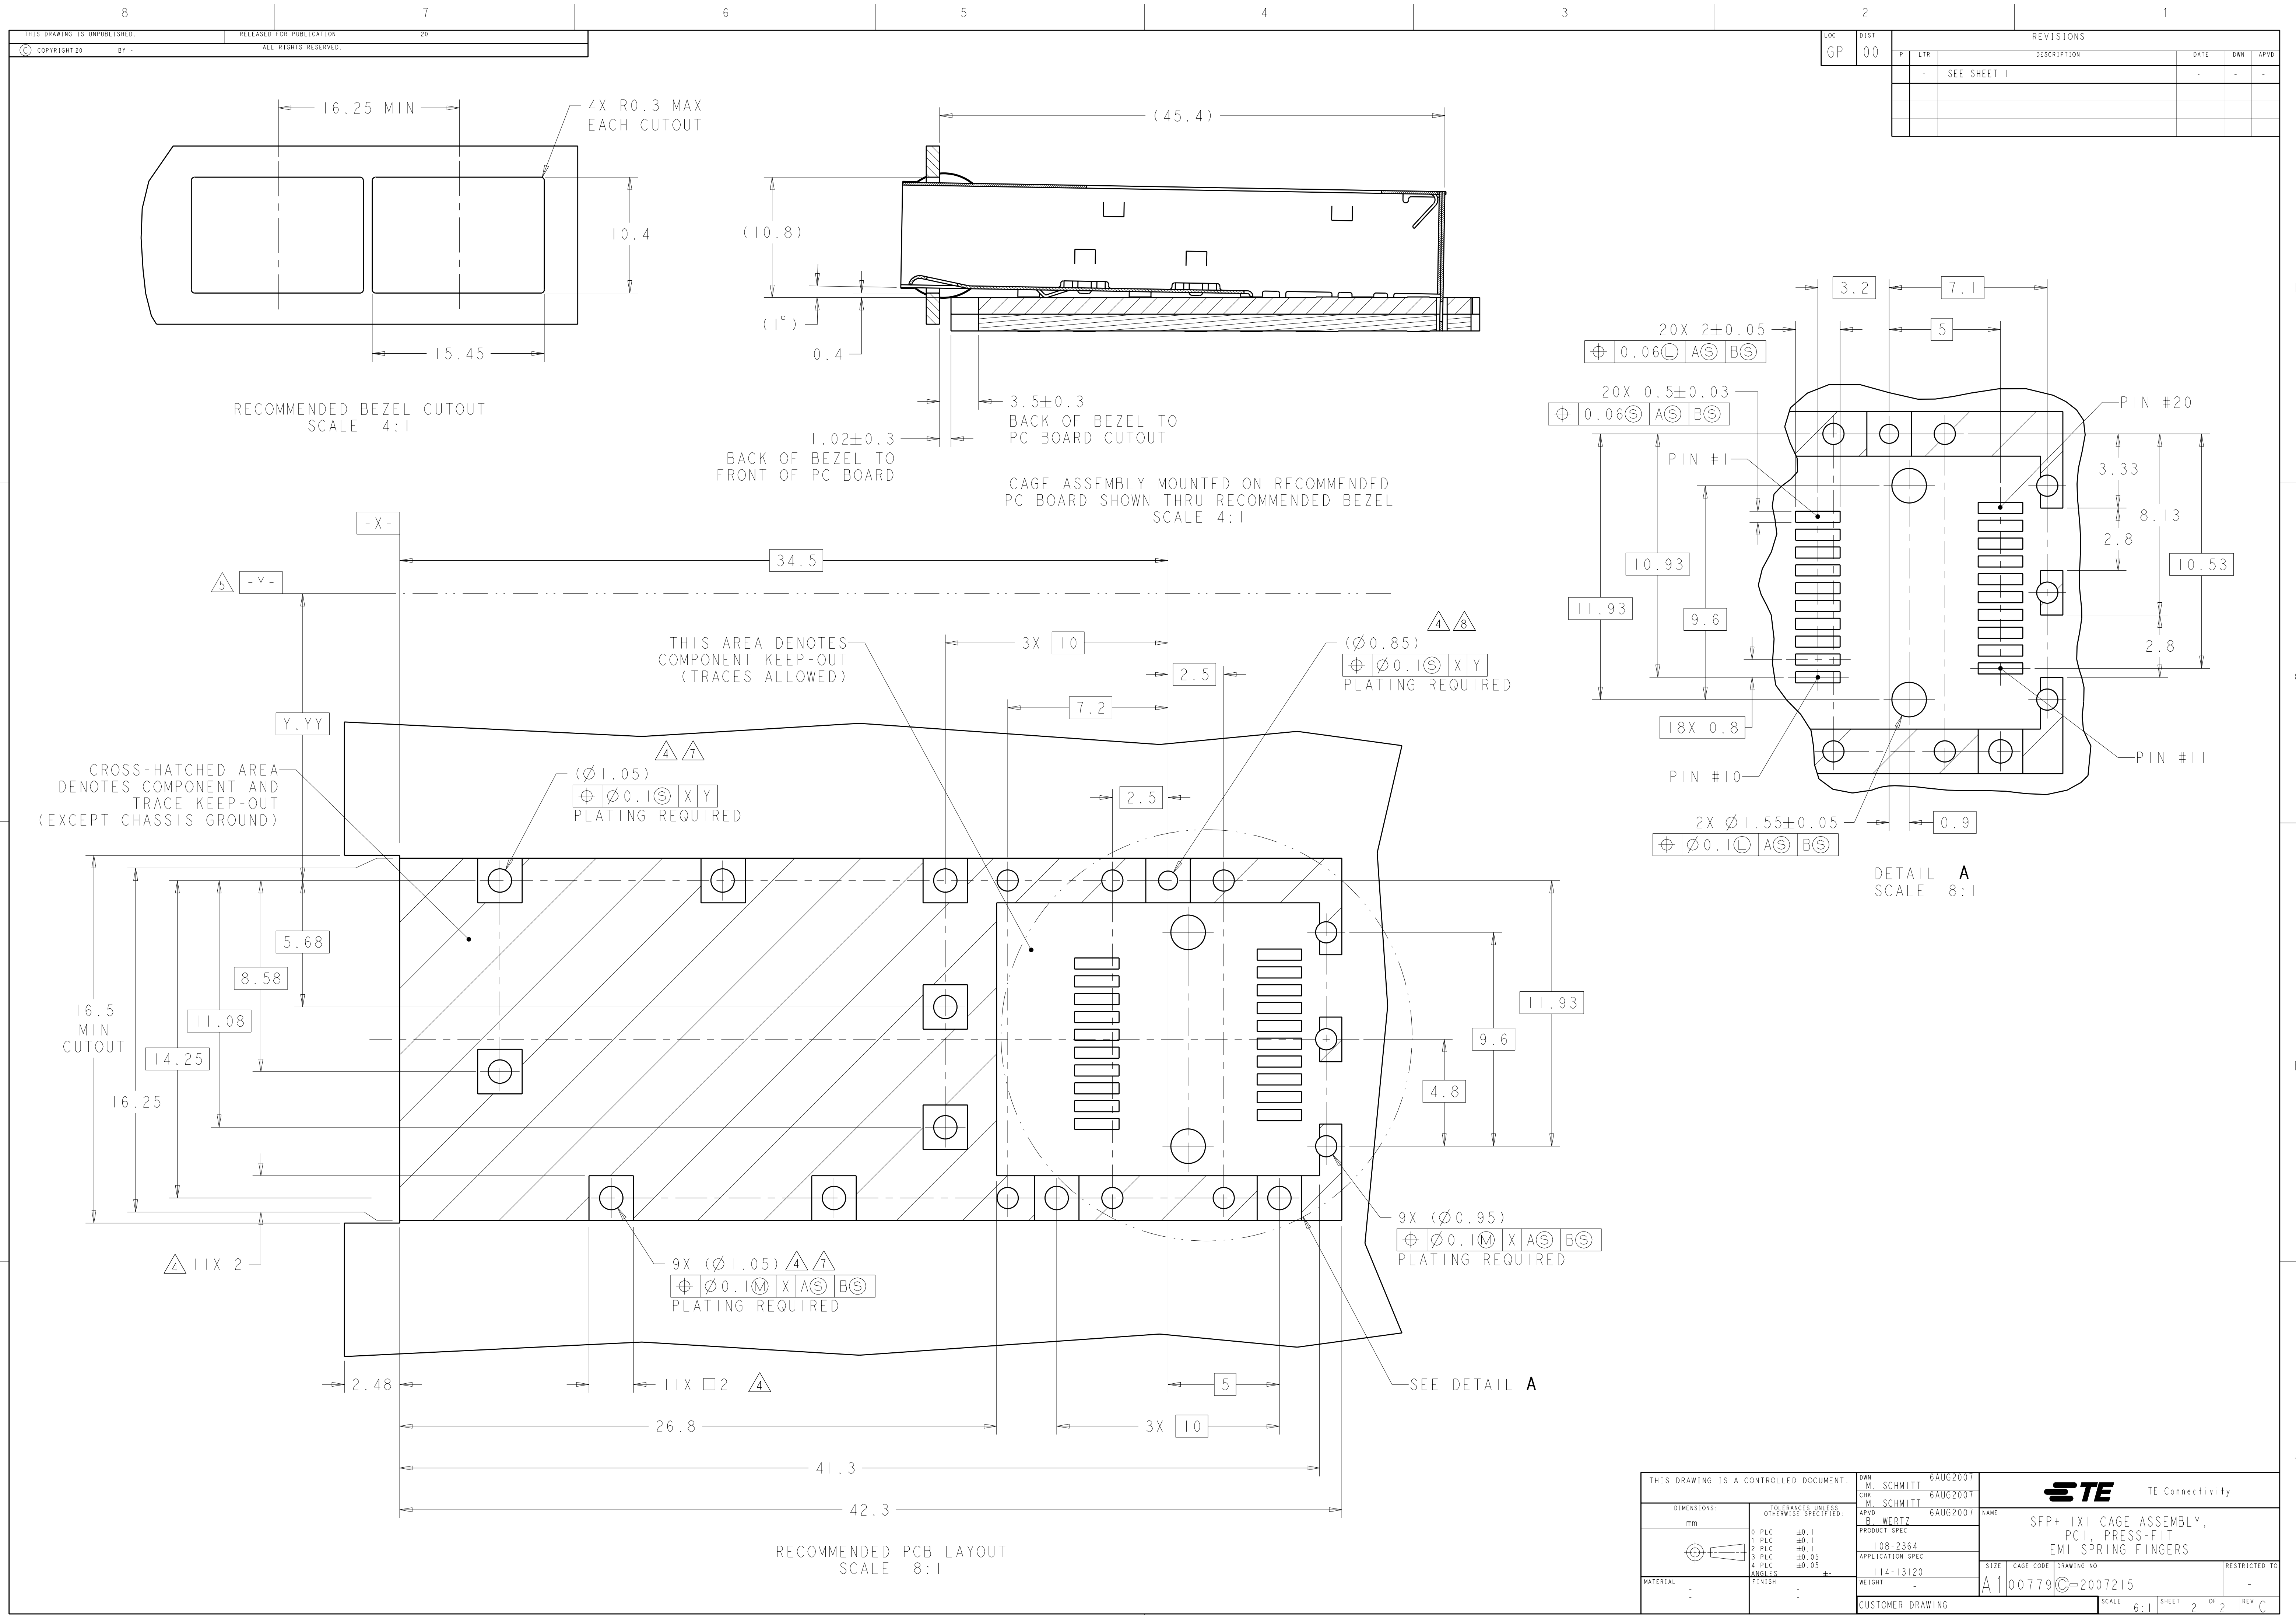

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2007215-2](#)