

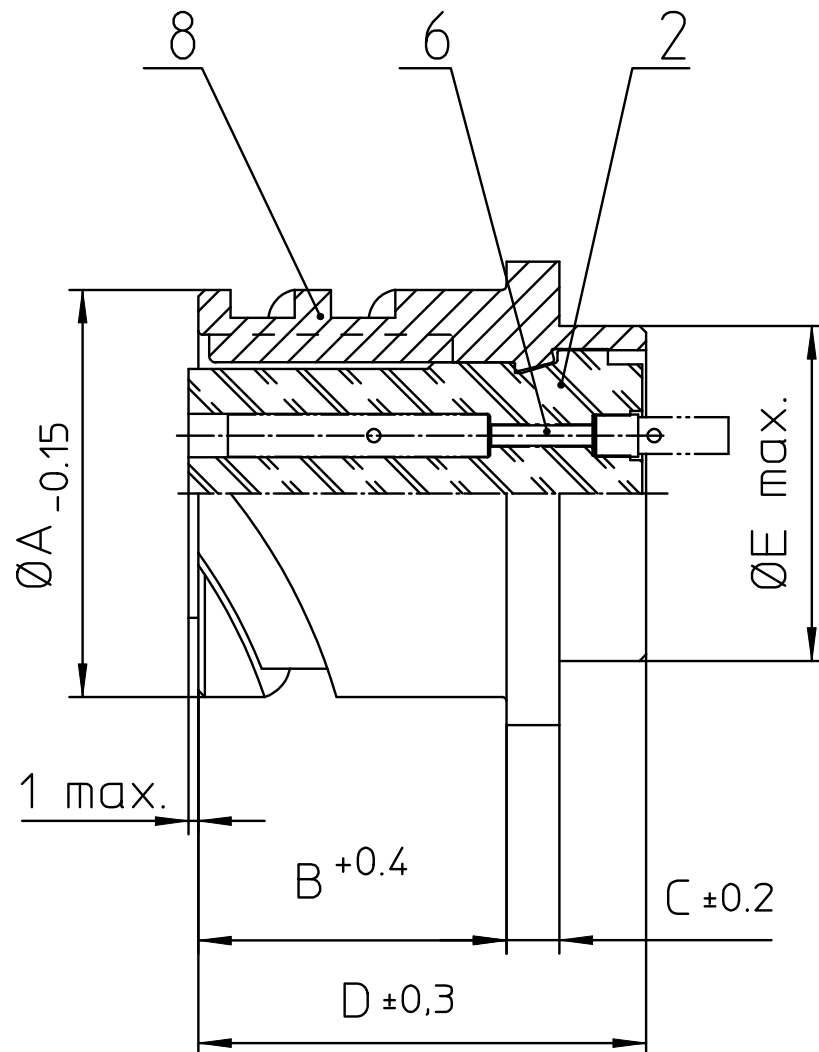


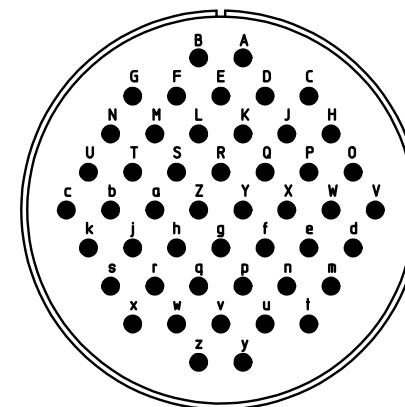

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 8   | DOSENGEHÄUSE / SHELL                    |

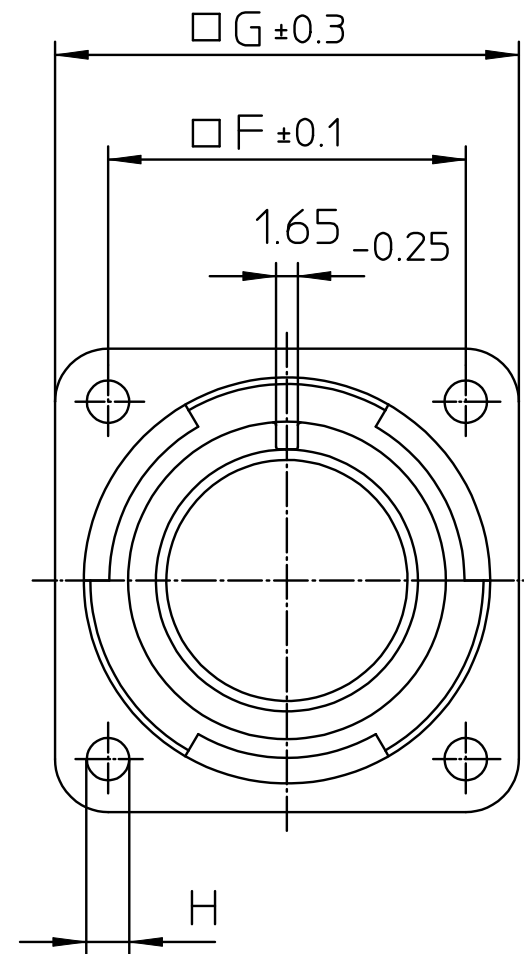

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 59.6              |
| B   | 22.2              |
| C   | 4                 |
| D   | 33.8              |
| E   | 52.6              |
| F   | 49.2              |
| G   | 63.5              |
| H   | 4.3               |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.  
 Specification and Dimensions subject to change  
 Drawings illustrate normal insulator positioning

|                                                              |
|--------------------------------------------------------------|
| <b>Material Specification:</b>                               |
| Shell Material: Aluminium alloy                              |
| Shell Plating: Olive drab chromate over cadmium (conductive) |
| Insulator Material: CR-Elastomere                            |
| Contact Material: Copper alloy                               |
| Contact Plating: Gold 0,5 µm                                 |

all dimensions are in mm  
 Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
 CUSTOMER



description CA3102E36-10SXB-F80-A176  
 Box mounting receptacle

AWG Crimp / Socket / Layout: 36-10

© All rights reserved. Reproduction or issue to third in any form  
 whatever is only permitted with written authorization of ITT Cannon



page 1/1  
 revision 1983 24. Nov 20