

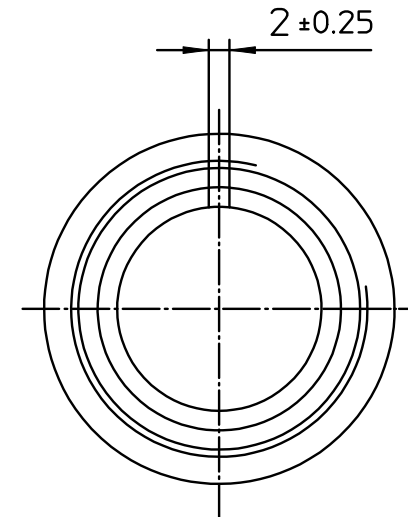


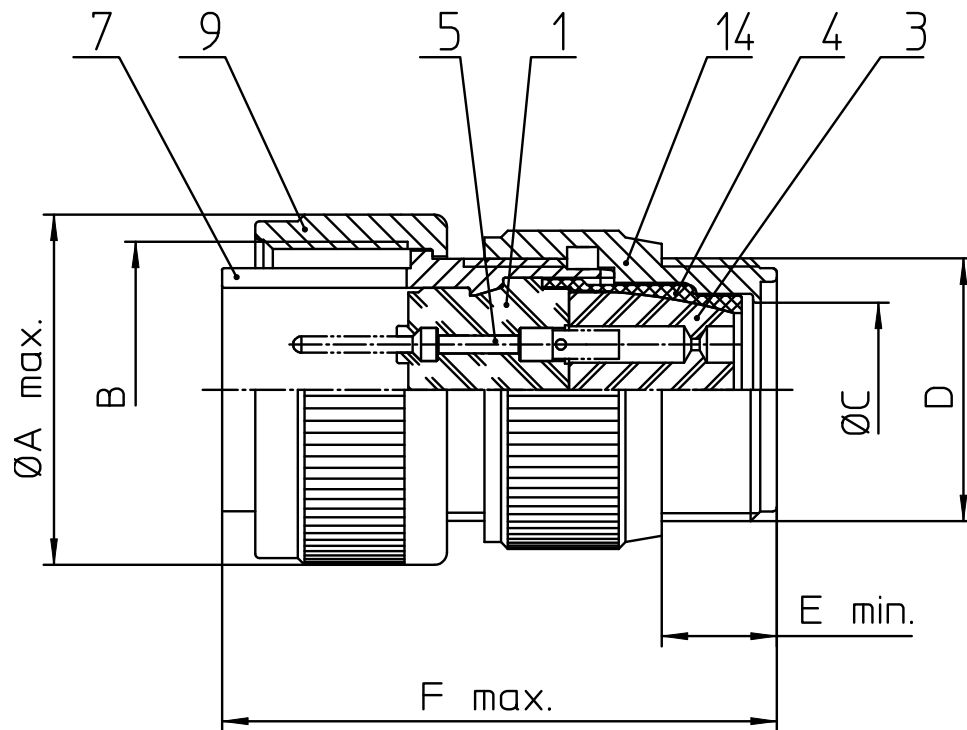

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 37.4              |
| B   | 1 1/4-18NEF-2B    |
| C   | 19.8              |
| D   | 1 3/16-18NEF-2A   |
| E   | 9.5               |
| F   | 55                |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3   | DICHTKÖRPER / GROMMET               |
| 4   | ENDRING / ENDRING                   |
| 5   | KONTAKTSTIFT / CONTACT PIN          |
| 7   | ZYLINDERGHÄUSE / BARREL             |
| 9   | ÜBERWURFMUTTER / COUPLING NUT       |
| 14  | F-ENDGEHÄUSE / F-ENDBELL            |



Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

|                                |                                                  |
|--------------------------------|--------------------------------------------------|
| <b>Material Specification:</b> |                                                  |
| Shell Material:                | Aluminium alloy                                  |
| Shell Plating:                 | Olive drab chromate coating over cadmium plating |
| Insulator Material:            | Neoprene                                         |
| Contact Material:              | Copper alloy                                     |
| Contact Plating:               | Hard silver                                      |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description CA3106F20-22P-F80  
Plug, straight  
Endbell for flex tube  
AWG Crimp / Pin / Layout: 20-22

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon



page 1/1  
revision 1017 17. Aug 20