


ZC2JC1H29

limit switch body ZC2J - fixed - without display - 1C/O - M20

Product availability: Non-Stock - Not normally stocked in distribution facility

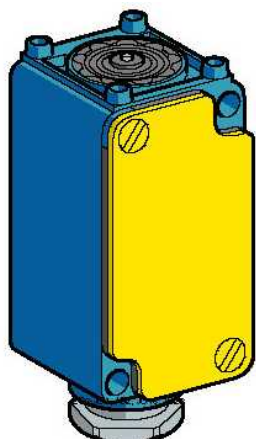

Main

Commercial Status	Commercialised
Range of product	OsiSense XC
Series name	Standard format
Product or component type	Limit switch body
Device short name	ZC2J
Body type	Fixed
Product compatibility	XC2J
Associated head	ZC2JE01 ZC2JE02 ZC2JE03 ZC2JE05 ZC2JE09 ZC2JE61 ZC2JE62 ZC2JE63 ZC2JE64 ZC2JE65 ZC2JE66 ZC2JE70
Body material	Metal
Cable entry	1 entry tapped for M20 x 1.5 cable gland
Number of poles	1
Contacts type and composition	1 C/O
Contacts operation	Snap action
Number of steps	1 1 position
Contacts material	Silver plated contacts

Complementary

Local display	Without
Electrical connection	Screw-clamp terminals, clamping capacity: 1 x 0.5...2 x 2.5 mm ²
Positive opening	Without
Minimum actuation speed	0.01 m/min
[Ie] rated operational current	0.27 A at 250 V, DC-13, Q300 conforming to EN/IEC 60947-5-1 appendix A 3 A at 240 V, AC-15, A300 conforming to EN/IEC 60947-5-1 appendix A
[Ithe] conventional enclosed thermal current	10 A
[Ui] rated insulation voltage	300 V conforming to CSA C22.2 No 14 contact block 500 V conforming to IEC 60947-1 contact block
Resistance across terminals	0.25 mOhm conforming to IEC 60255-7 category 3
Short circuit protection	10 A by gG cartridge fuse
Electrical durability	5000000 cycles, DC-13 48 V, 7 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 5000000 cycles, DC-13 24 V, 10 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 5000000 cycles, DC-13 120 V, 4 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C
Width	1.57 in (40 mm)
Height	3.19 in (81 mm)
Depth	1.61 in (41 mm)
Product weight	0.78 lb(US) (0.355 kg)
Terminals description ISO n°1	(11-12)NC (13-14)NO

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


Environment

IP degree of protection	IP65
IK degree of protection	IK08
Ambient air temperature for operation	-13...158 °F (-25...70 °C) for standard environment
Ambient air temperature for storage	-40...158 °F (-40...70 °C)
Environmental characteristic	Standard environment

Ordering and shipping details

Category	22449 - LIMIT SWITCHES,ACCESSORIES
Discount Schedule	T
GTIN	003389110833638
Nbr. of units in pkg.	1
Package weight(Lbs)	0.80
Product availability	Non-Stock - Not normally stocked in distribution facility
Returnability	N
Country of origin	FR

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Will be Compliant on 3Q2013
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available  Download Product Environmental
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Period	18 months
--------	-----------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[ZC2JC1H29](#)