

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0850130103

Status:

Active

Overview:

DIN 41612

Description:

2.54mm Pitch DIN 41612 Header, Vertical, C-Pin Press-Fit Style R Reverse, 0.60µm Selective Gold (Au), 64 Circuits, Lead-Free

Documents:

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-85013-0002 (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

Backplane Connectors

Series

85013

Application

Backplane

Component Type

PCB Header

Overview

DIN 41612

Product Name

IEC 603-2/DIN 41612

Style

R

UPC

800753874343

Physical

Circuits (Loaded)

64

Circuits (maximum)

96

Circuits Detail

Rows A & C

Color - Resin

Gray

Durability (mating cycles max)

400

First Mate / Last Break

No

Flammability

94V-0

Guide to Mating Part

No

Keying to Mating Part

Yes

Material - Metal

Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

Polyester

Net Weight

10.649/g

Number of Columns

32

Number of Pairs

Open Pin Field

Number of Rows

3

Orientation

Vertical

PC Tail Length

5.80mm

PCB Locator

No

PCB Retention

Yes

PCB Thickness - Recommended

1.60mm

Packaging Type

Tray

Pitch - Mating Interface

2.54mm

Pitch - Termination Interface

2.54mm

Plating min - Mating

0.610µm

Plating min - Termination

0.406µm

Surface Mount Compatible (SMC)

No


Temperature Range - Operating

-55° to +125°C

Termination Interface: Style

Through Hole - Compliant Pin

Electrical

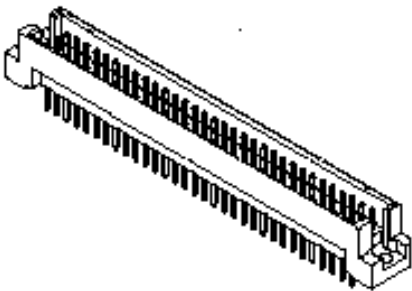

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
ED/71/2019 (16 July
2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

85013 Series

Mates With

85042 DIN 41612 Receptacle. 85052 DIN 41612 Header

Use With

850891079 Press-in Tool

Current - Maximum per Contact	2.5A
Data Rate	622.0 Mbps
Voltage - Maximum	1000V (RMS)
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Product Specification	PS-85013-0002
Sales Drawing	610-6043-201

This document was generated on 09/18/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[85013-0103](#)