

LOC		DIST		REVISIONS					
FX		00		DESCRIPTION			DATE	DWN	APVD
		P	LTR	REVISED PER ECO-09-011983			19MAY2009	DLD	WTW


KEYING OPTIONS
SCALE 2:1




OPTION "A"




OPTION "B"

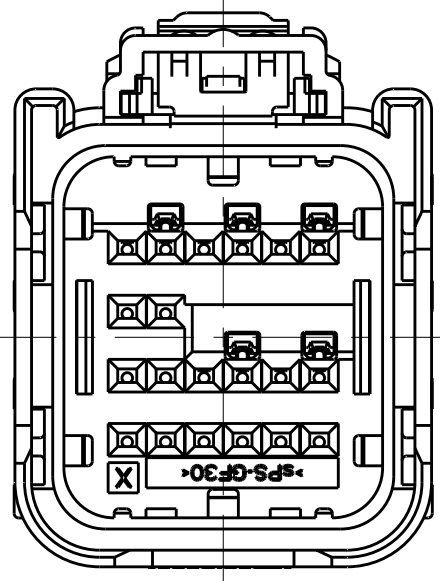


OPTION "C"

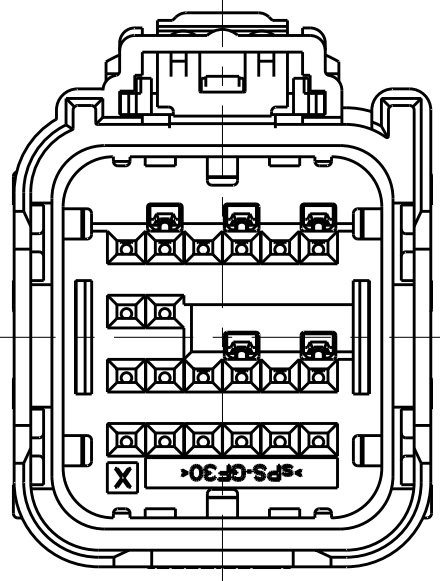

OPTION "D"

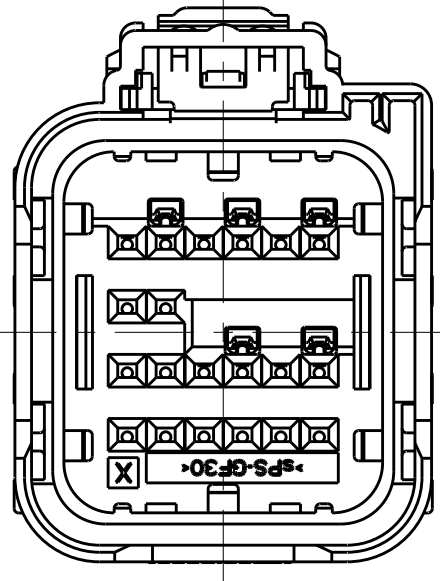

OPTION "E"

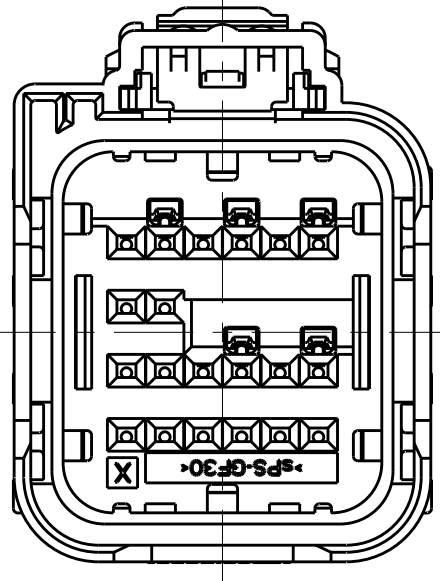



OPTION "F"




SECTION A-A
SHOWN WITH TPA IN
IT'S PRE-LOADED POSITION
(DELIVERY CONDITON)

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

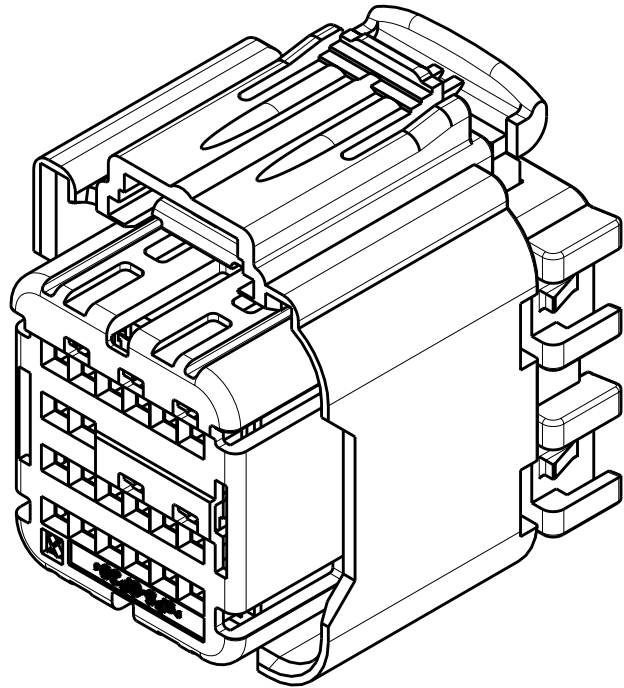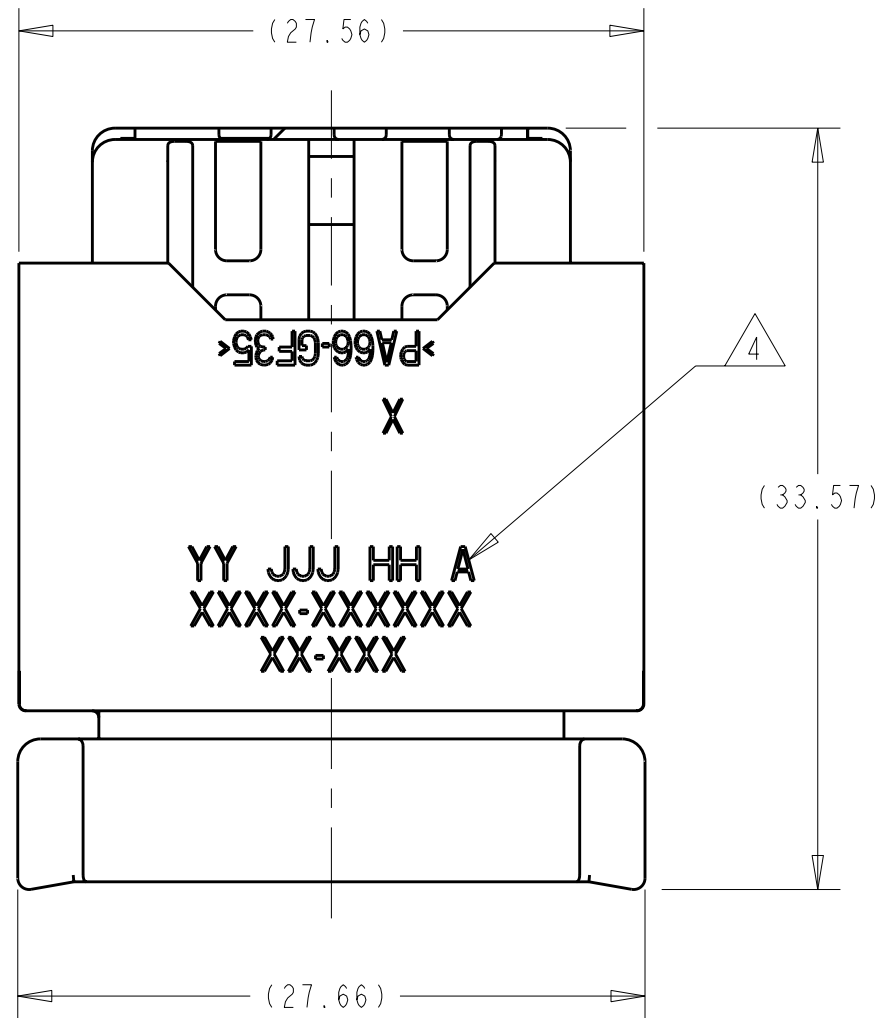

SCALE 2:1

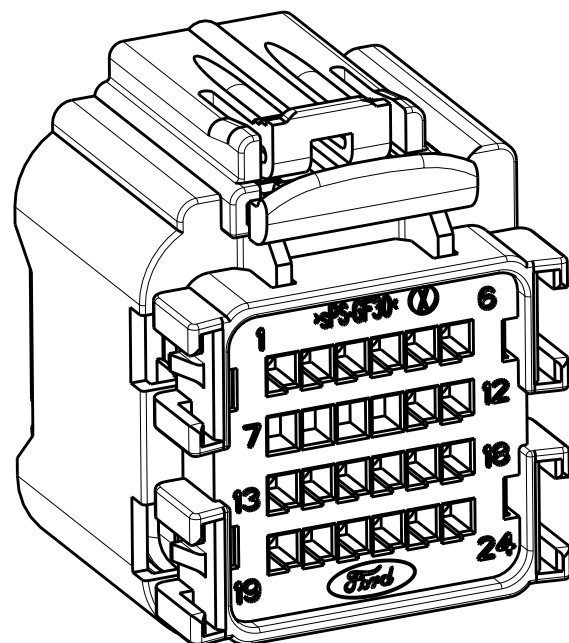

SCALE 2:1

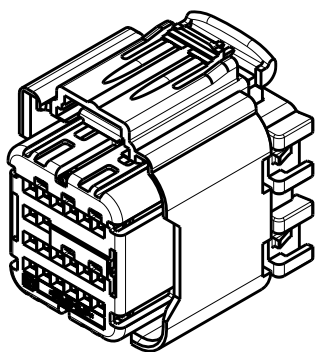

SCALE 1:1

KEYING OPTION "A" SHOWN

										SCALE 1:1			
KEYING OPTION "A" SHOWN													
ASSEMBLY PART NUMBER													
7													
CPA PBT-GF15 RED													
6													
PERIMETER SEAL SILICONE GREEN													
5													
GROMMET SILICONE BROWN													
4													
SHORTING BAR S.S. SEE COMPONENT DRAWING													
3													
COVER PA66 35% GF BLACK													
2													
SPACER FOR SHORTING BAR APPLICATIONS sPS 30% GF NATURAL													
1													
5													
PLUG WITH KEYING OPTION "D" AND 5 SHORTING BAR POSITIONS CONFIGURATION PA66 35% GF BLACK													
5													
PLUG WITH KEYING OPTION "C" AND 5 SHORTING BAR POSITIONS CONFIGURATION PA66 35% GF BLACK													
5													
PLUG WITH KEYING OPTION "B" AND 5 SHORTING BAR POSITIONS CONFIGURATION PA66 35% GF BLACK													
5													
PLUG WITH KEYING OPTION "A" AND 5 SHORTING BAR POSITIONS CONFIGURATION PA66 35% GF BLACK													
ITEM DESCRIPTION MATERIAL FINISH/COLOR													
QUANTITY													

[illegible]AMP 4805 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-1924670-8](#)