

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0526101433

Status:


Active

Overview:

Easy-On FFC FPC Connectors

Description:

Easy-On FFC/FPC Connector, 1.00mm Pitch, Slider Series, Vertical, 5.75mm Height, 14 Circuits, Tin-Silver-Bismuth Plating

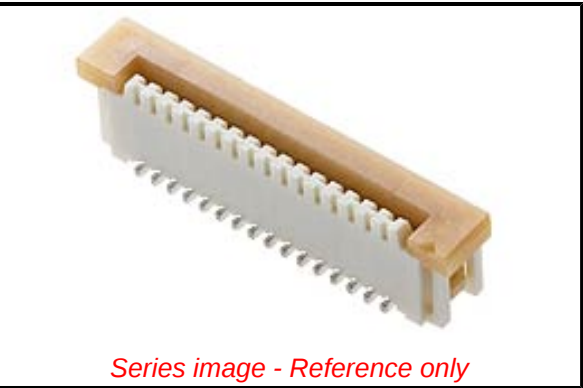

Series image - Reference only

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-52610-032-001 \(PDF\)](#)

[Packaging Specification SPK-52610-003-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

[Product Literature \(PDF\)](#)

[Product Literature \(PDF\)](#)

Agency Certification		
CSA		LR19980
UL		E29179
General		
Product Family		FFC/FPC Connectors
Series		52610
Datasheet Order No		987651-8732, 987651-8736_ZH, 987651-8768_DE, 987651-8772_JA, 987651-8776_KO, 987651-8780_ES
Overview		Easy-On FFC FPC Connectors
Product Guide Order No		987651-8061
Product Literature Order No		987652-0194, Reference Guide#
Product Name		Easy-On
Series Name		Slider
UPC		887191316123
Physical		
Actuator Type		Slider
Circuits (Loaded)		14
Color - Resin		Natural
Contact Position		N/A
Durability (mating cycles max)		30
Flammability		94V-0
Mated Height		5.75mm
Material - Metal		Phosphor Bronze
Material - Plating Mating		Silver, Tin-Bismuth
Material - Plating Termination		Silver, Tin-Bismuth
Material - Resin		Nylon
Net Weight		692.600/mg
Number of Rows		1
Orientation		Vertical
PC Tail Length		2.00mm
PCB Locator		No
PCB Mounting		Surface Mount
PCB Retention		None
Packaging Type		Embossed Tape on Reel
Pitch - Mating Interface		1.00mm
Pitch - Termination Interface		1.00mm
Polarized to PCB		No
Stackable		No
Temperature Range - Operating		-40° to +85°C
Wire/Cable Type		FFC/FPC
Electrical		
Current - Maximum per Contact		1.0A

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - ED/71/2019 (16 July 2019)	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

52610 Series

Mates With

Premo-Flex FFC Cable [15167](#) , [98267](#) , [15267](#)

Voltage - Maximum	125V
Material Info	
Reference - Drawing Numbers	
Packaging Specification	SPK-52610-003-001
Product Specification	PS-52610-032-001
Sales Drawing	SD-52610-048-001, SD-52610-049

This document was generated on 10/16/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[52610-1433](#)