REVISION DS

DO NOT SCALE FROM THIS PRINT

NOTES:


- 1. © REPRESENTS A CRITICAL DIMENSION.
- 2. MINIMUM PUSHOUT FORCE: .5 LB. $\langle C \rangle$ 3. COPLANARITY: .004[0.10] = POS 05 THRU 26 .006[0.15] = POS 27 THRU 50
 - 4. TUBE ALL POSITIONS. PARTS TO BE TUBED WITH NOTCH GOING WITH ARROW.
 - 5. PINS CAN BE ORIENTED IN ANY DIRECTION; BOTH ROWS MUST FACE SAME WAY. 6. SEE NOTCH FOR PROPER ORIENTATION.
- ⟨□⟩ 7. MAXIMUM PIN HEIGHT VARIATION: .003[0.08] FROM PIN TO PIN AND ROW TO ROW, MUST BE MEASURED BETWEEN ADJACENT PINS.
 - 8. DUE TO HIGH AMOUNT OF INSERTION FORCE NEEDED, THE -LC OPTION IS NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH THE -LC OPTION.
 - 9. DIMENSION TO BE MEASURED AT BEND.

*DIMENSIONS N/A FOR -N OPTION

q

- 1° MAX SWAY

(EITHER DIRECTION)

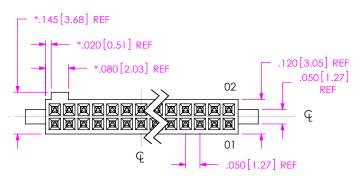

SFM-1XX-XX-XXX-D-XXX

No OF POSITIONS ALL POSITIONS AVAILABLE -02 THRU -50 (USE BODY: SFM-XX-D-XX-X)

LEAD STYLE

(No OF POS x .050[1.27]) + .015[0.38] REF

 $\langle C \rangle$

(SEE TABLE 1)

(NO OF POS x .050[1.27]) - .050[1.27] REF

180 [4.57] REF

"B" REF

(No OF POS x .050[1.27]) + .155[3.94] REF

- -01: THROUGH HOLE (USE CONTACT: C-44-01-XXX) SEE FIG 1, SHT 1)
- -02: SURFACE MOUNT (USE CONTACT: C-44-02-XXX) SEE FIG 2, SHT 2)
- -03: STRAIGHT MODIFIED (USE CONTACT: C-44-03-XXX) (SEE FIG 1, SHT 1)
- -L1: THROUGH HOLE (LOW INSERTION) (USE CONTACT: C-61-01-XXX) (SEE FIG 1, SHT 1)
- -L2: SURFACE MOUNT (LOW INSERTION) (USE CONTACT: C-61-02-XXX) SEE FIG 2, SHT 2)
- -L3: STRAIGHT MODIFIED (LOW INSERTION) (USE CONTACT: C-61-03-XXX) SEE FIG 1, SHT 1)
- -T1: THROUGH HOLE (PHOS BRONZE) (USE CONTACT: C-119-01-XXX) (SEE FIG 1, SHT 1)
- -T2: SURFACE MOUNT (PHOS BRONZE) (USE CONTACT: C-119-02-XXX) (SEE FIG 2, SHT 2)

ANY CHANGES MADE TO THIS PRINT MUST ALSO BE MADE TO THE SFC PRINT

- (LEAVE BLANK FOR STANDARD AND USE SFM-XX-D)
- -N: NO POLARIZATIÓN NOTCH (USE SFM-XX-D-XX-N)
- -A: ÀLIGNMENT PIN (USÉ SFM-XX-D-A-X) (SEE FIG 4, SHT 2)
- -LC: LOCKING CLIP (SEE FIG 6, SHT 3 & NOTE 8) (AVAILABLE ON ALL LEADS)
- -P: PICK AND PLACE PAD (SEE FIG 5, SHT 2)
- (AVAILABLE ON 5 THRU 50 POSITION ONLY) -TR: TAPE & REEL (SEE SHT 4)
- (NOT AVAILABLE WITH -DS OPTION)
- -K: POLYIMIDE FILM PAD (.005[0.13] THICKNESS) (SEE FIG 3, SHT 2) (USE K-DOT-.157-.250-.005)
- -SN: SOLDER NAIL FOR .062 BOARD (SFM-XX-D-SN AND WT-27-01-T) (AVAILABLE WITH LEAD STYLE -02, -L2 & -T2) (NOT AVAILABLE WITH -A & -LC)
- -SN2: SOLDER NAIL FOR .093 BOARD (SFM-XX-D-SN AND WT-27-02-T) (AVAILABLE WITH LEAD STYLE -02, -L2 & -T2) (NOT AVAILABLE WITH -A & -LC)
- -DS: DUAL SCREW DOWN FOR .062 BOARD (SEE FIG 8, SHT 3) ONLY AVAILABLE WITH -01, -02 AND -03 LEAD STYLE) (NOT AVAILABLE WITH OPTIONS -N, -A, -LC, -P, -TR, -K, -SN AND SN2), (USES SFM-XX-D-DS, CPS-RR-XX-XX-X, ACCRT-01 AND WT-27-XX-T ALWAYS FILLED)

BODY SPECIFICATION -D: DOUBLE ROW

PLATING SPECIFICATION

- -S: 30µ" SELECTIVE GOLD IN CONTACT AREA, MÂTTE TIN ON TAIL
- -F: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
- -H: 30u" HEAVY GOLD IN CONTACT AREA. 3µ" GOLD ON TAIL
- -L: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
- -STL: 30u" SELECTIVE GOLD IN CONTACT AREA. TIN/LEAD (90/10+/-5%) TAIL (ONLY AVAILABLE ON -02 OR -L2 LEADSTYLES)
- -SM: 30µ" SELECTIVE GOLD IN CONTACT AREA, MÄTTE TIN ON TAIL
- -FM: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
- -LM: 10u" LIGHT SELECTIVE GOLD IN CONTACT AREA. MATTE TIN ON TAIL

SECTION "A"-"A"

DECIMALS **ANGLES** 2°

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING REPRODUCTION USE PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED. IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS

WRITTEN CONSENT OF SAMTEC INC.

PROPRIETARY NOTE

SHEET SCALE: 3:1

e-Mail info@SAMTEC.com .050 x .050 SOCKET STRIP DOUBLE ROW ASSEMBLY

PHONE: 812-944-6733

520 PARK EAST BLVD, NEW ALBANY, IN 47150

SFM-1XX-XX-XXX-D-XXX

BY: JORDAN 12/11/89 SHEET 1 OF 4

FAX: 812-948-5047

code 55322



TABLE 1		
SUFFIX	TAIL LENGTH "A"	TAIL WIDTH "B"
-X1	.120[3.05]	.020[0.51]
-X3	.075[1.91]	.016[0.41]

.110[2.79] REF

UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN INCHES. TOLERANCES ARE:

.XX: ±.01 [0.3] .XXX: ±.005 [0.13] .XXXX: ±.0020 [0.051]

DO NOT SCALE DRAWING INSULATOR: LCP UL 94V-O, COLOR: BLACK

·SFM-XX-D-LC-X

C-XX-01-XXX

(SEE NOTE 5)

.015 0.38 REF


2° MAX SWAY (EITHER DIRECTION)


.050 [1.27] (C)


.005 [0.13] REF


CONTACT: TIGER EYE: BeCu TIGER EYE LITE: PHOSPHOR BRONZE


F:\DWG\MISC\MKTG\SFM-1XX-XX-XXX-D-XXX-MKT.SLDDRW

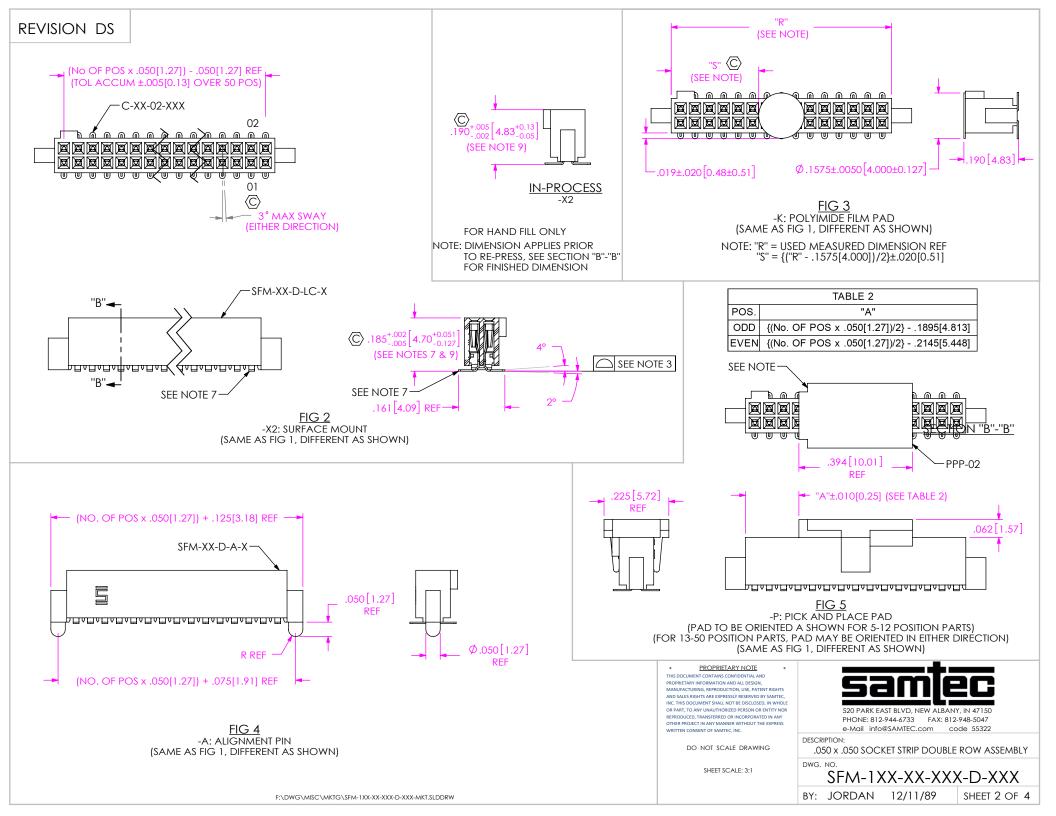

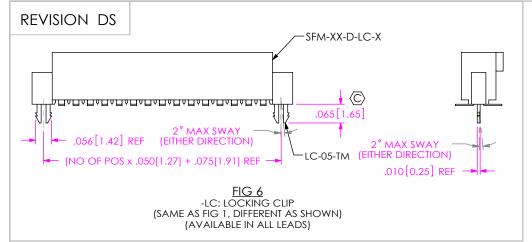

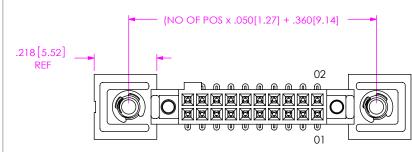



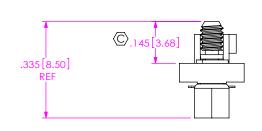



F:\DWG\MISC\MKTG\SFM-1XX-XX-XXX-D-XXX-MKT.SLDDRW

TABLE 3


"C"

OPTION

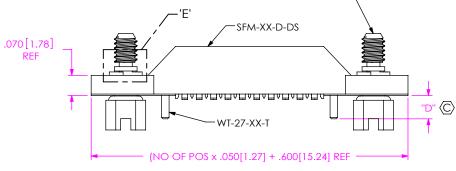

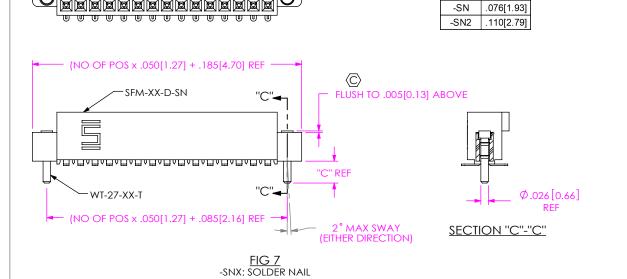

(SAME AS FIG 1, DIFFERENT AS SHOWN)

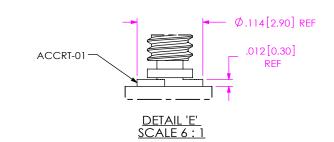

CPS-RR-M2-01-X

FIG 8 -DS: DUAL SCREW DOWN (SAME AS FIG 2, DIFFERENT AS SHOWN)



DO NOT SCALE DRAWING

SHEET SCALE: 3:1

samlec

520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

DESCRIPTION:

.050 x .050 SOCKET STRIP DOUBLE ROW ASSEMBLY

SFM-1XX-XX-XXX-D-XXX

BY: JORDAN 12/11/89

SHEET 3 OF 4

