

RSL1PVBU

slim relay mounted on screw socket with LED
and protection circuit, 24 V



Main

Range of product	Zelio Relay
Series name	Interface relay
Product or component type	Plug-in relay
Device short name	RSL
Contacts type and composition	1 C/O
Contacts operation	Standard
Control circuit voltage	24 V DC
[Ithe] conventional enclosed thermal current	6 A at $\leq 55^{\circ}\text{C}$
Status LED	With
Shape of pin	Flat (PCB type)
Sale per indivisible quantity	10

Complementary

Fixing mode	Plastic compression spring
Average resistance	3390 Ohm (DC) at $23^{\circ}\text{C} \pm 10\%$
[Ui] rated insulation voltage	250 V conforming to EN/IEC
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC
Contacts material	Silver alloy (AgSnO ₂)
[Ie] rated operational current	6 A 1 C/O (AC-1/DC-1) conforming to IEC/UL
Minimum switching current	100 mA
Maximum switching voltage	300 V DC 400 V AC
Minimum switching voltage	12 V
Maximum switching capacity	1500 VA (AC) 18...150 W (DC)
Minimum switching capacity	120 mW
Operating rate	≤ 1200 cyc/mn (no-load) ≤ 6 cyc/mn (under load)
Mechanical durability	≤ 10000000 cycles
Electrical durability	50000 cycles for inductive load (3 A at 250 V, AC-15) NO 60000...2000000 cycles for resistive load (0.5...6 A at 250 V, AC-1)
Operating time	12 ms (between coil energisation and making of the On-delay contact)DC 5 ms (between coil de-energisation and making of the Off-delay contact)DC
Marking	CE
Protection category	RT III
Operating position	Any position
Height	78.6 mm
Width	6.2 mm
Depth	95 mm
Terminals description ISO n°1	(11-12-14)OC (A1-A2)CO
Product weight	0.029 kg
Load current	6 A at 250 V AC for 0.5 mm mounting distance
Average consumption	DC: 0.17 W
Drop-out voltage threshold	$\geq 0.05 U_c$ (DC)
Contact terminal arrangement	Separate


Connections - terminals	Screw connectors (1 x 0.2...1 x 2.5 mm ² /AWG24...AWG14)flexible cablewith cable end Screw connectors (1 x 0.2...1 x 2.5 mm ² /AWG24...AWG14)solid cablewithout cable end
Tightening torque	<= 0.5 N.m (M2.5)

Environment

Input voltage	24 V AC/DC (input voltage limit: 21.6...28.8 V)
Dielectric strength	1000 V AC (between contacts) 4000 V AC (between coil and contact)
Standards	CSA C22-2 No 14 EN/IEC 61810-1 UL 508
Product certifications	CSA GOST UL
Ambient air temperature for storage	-40...85 °C
Vibration resistance	10 gn (f = 10...150 Hz)not operating conforming to EN/IEC 60068-2-6 5 gn (f = 10...150 Hz)in operation conforming to EN/IEC 60068-2-6
IP degree of protection	IP40 conforming to EN/IEC 60529
Shock resistance	10 gn (on opening) conforming to EN/IEC 60068-2-27 5 gn (on closing) conforming to EN/IEC 60068-2-27
Ambient air temperature for operation	-40...55 °C (AC)
RoHS EUR status	Compliant
RoHS EUR conformity date	0929

Slim Interface Relay, pre-Assembled

Screw Connector

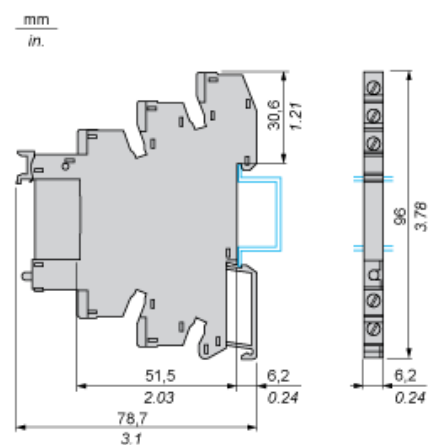

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[RSL1PVBU](#)