

REV. 0

DCO 142341

COIL: @ 25°C
 RESISTANCE _____ 210 OHMS \pm 10%
 NOMINAL VOLTAGE _____ 12.0 VDC
 MUST OPERATE _____ 5.4 VDC

MUST RELEASE _____ 3.2 VDC MAX, 0.6 VDC MIN.

ENVIRONMENT:

VIBRATION _____ 10 _____ CPS TO _____ 3000 _____ CPS @ _____ 30 _____ g's


SHOCK _____ 75 _____ g's _____ 6 _____ MS. DURATION

TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C

NOTES: _____ OPERATE & RELEASE 4 MS MAX.

CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

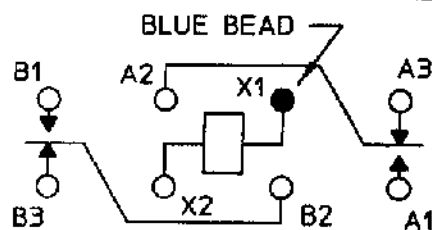

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE
 50,000 OPERATIONS

DR. PBB 9/13/00 CK.TLG 9-13-00

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. _____ QPL

CUST. NO. M39016/13-076P REV. _____

"3SBC" RELAY

3SBC2021A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SBC2021A2](#)