


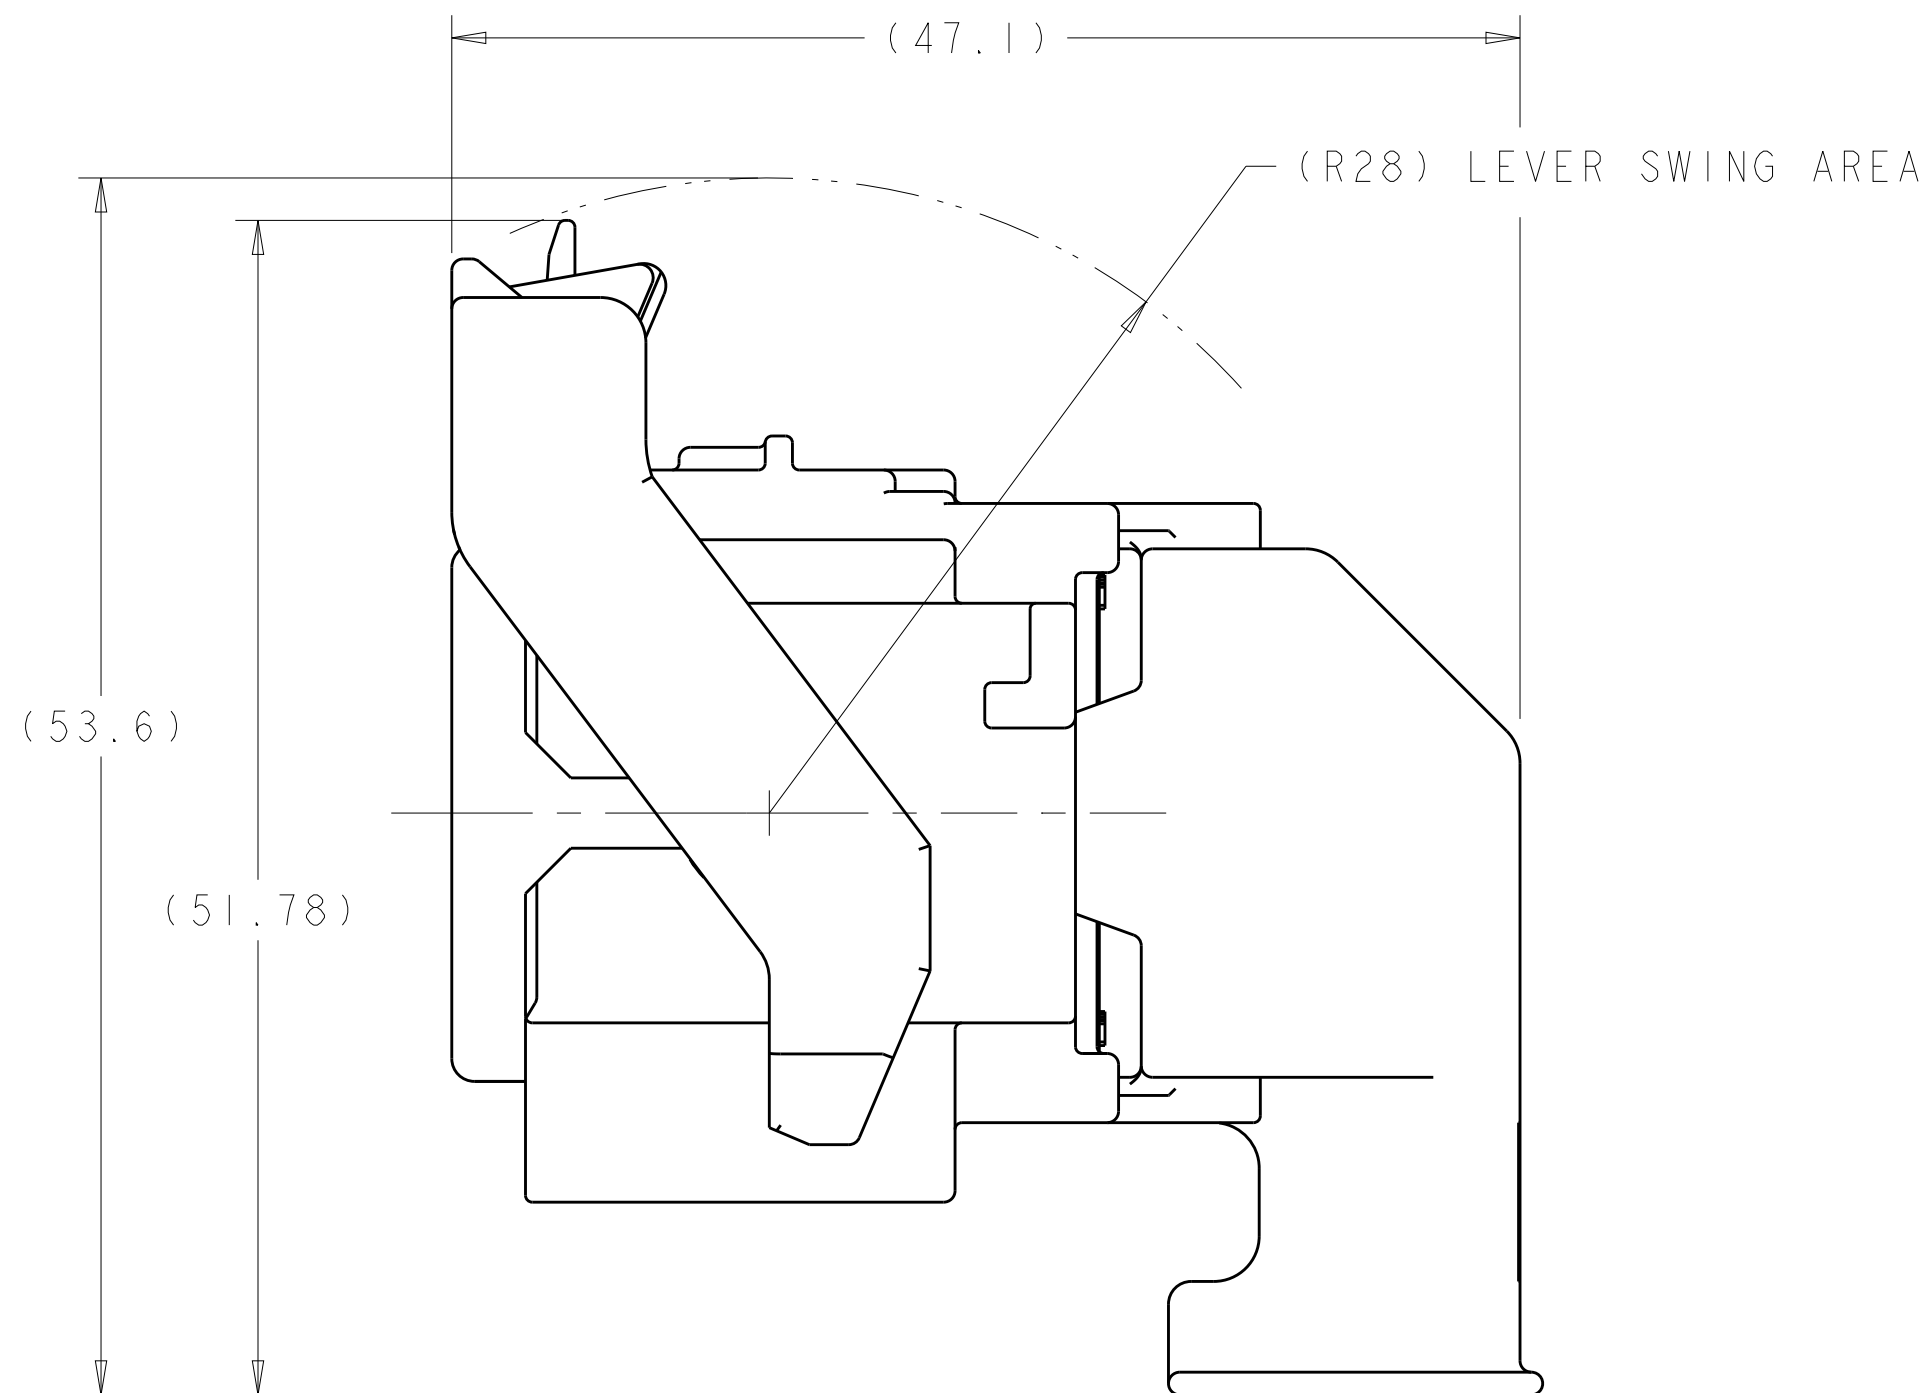


CAM LEVER - 35% GLASS FILLED NYLON, GRAY
GROMMET - SILICONE, BROWN
PERIMETER SEAL - SILICONE, GREEN

- 4 CAVITIES WITH A NUMERIC SYMBOL INDICATES CLOSED TERMINAL LOCATIONS.
BLANK CAVITIES INDICATE OPEN TERMINAL HOLE LOCATIONS.


KEYING OPTION "A" 
1438083-1

SHOWN WITH CAM LEVER AND SPACER
IN LOADED POSITION WITH
OPTIONAL WIRESHIELD

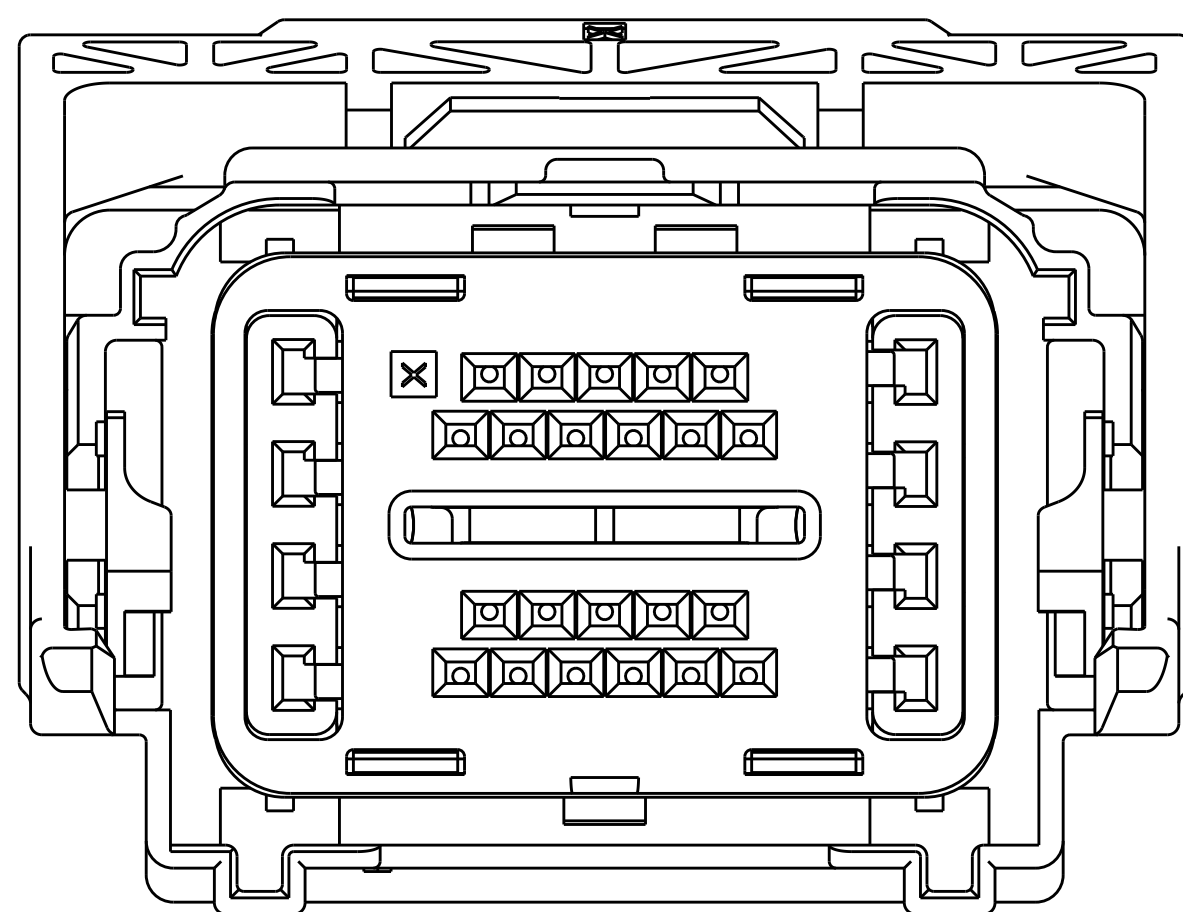

KEYING OPTION "B" 
2272926-1

CHART FOR CLOSED CIRCUIT CONFIGURATIONS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 150C2003 R. VESTAL CHK 150C2003 D. STRAUSSER APVD 150C2003 D. STRAUSSER		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.1 1 PLC ±0.3 ID 2 PLC ±.1 3 PLC ±.1 4 PLC ±.1 ANGLES ±1°		NAME PCM HARNESS ASSEMBLY, 30-WAY CONNECTOR	
MATERIAL - 		FINISH - - -		SIZE CASE CODE DRAWING NO A100779C1438083	
CUSTOMER DRAWING		WEIGHT -		RESTRICTED TO -	
				SCALE 3:1 SHEET 1 OF 2 REV H8	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1438083-6](#)