



REVERSE FIBER PATH

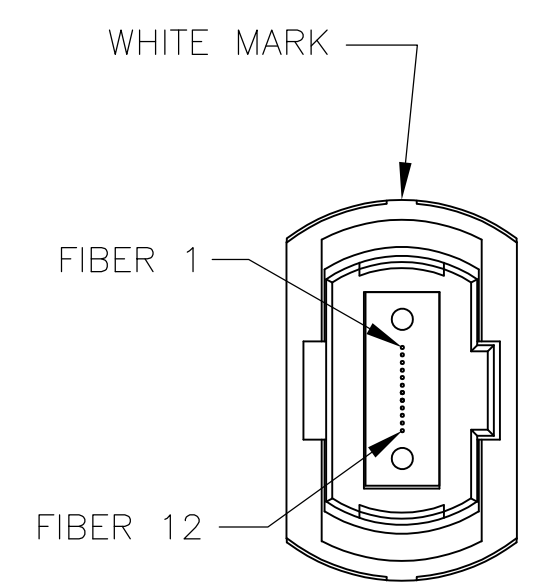

VIEW A-A
NOT TO SCALE

MTP® LEFT FIBER #		MTP® RIGHT FIBER #
1	↔	12
2	↔	11
3	↔	10
4	↔	9
5	NOT CONNECTED	8
6	NOT CONNECTED	7
7	NOT CONNECTED	6
8	NOT CONNECTED	5
9	↔	4
10	↔	3
11	↔	2
12	↔	1

MTP® CONNECTOR FIBER PATH

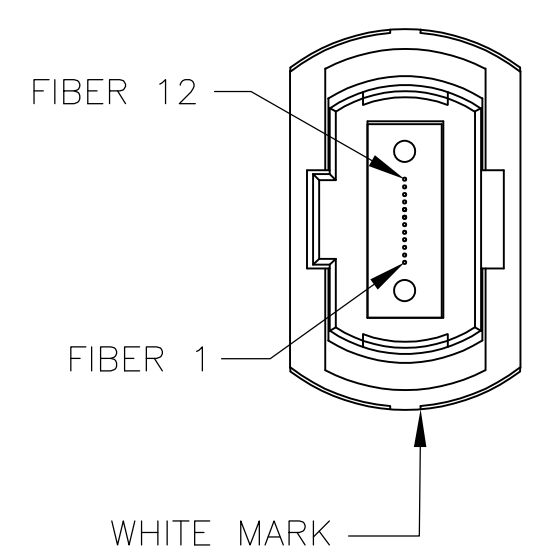

VIEW B-B
NOT TO SCALE

- NOTES:
- 1 MAXIMUM CONNECTOR INSERTION LOSS (850nm):
0.5dB + 3.5dB/km. SEE TABLE.
FIBER POSITIONS 5, 6, 7, AND 8
ARE INACTIVE AND NOT TESTED.
 - 2 STANDARD TRACE LABEL TO BE APPLIED AT BOTH ENDS.
 - 3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS
OF TEC-138-702.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
METERS [INCHES]

MATERIAL

-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-
FINISH	-	-

APVD
J.BARRY

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DWN
K.GLATFELTER

CHK
J.BARRY

APVD
J.BARRY

15JAN2009

15JAN2009

15JAN2009

TE Connectivity

CABLE ASSEMBLY, FIBER OPTIC, QSFP, OM3
3mm ROUND CABLE, OFNP, MTP®W/NO PINS,
REVERSED PATH

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=1938323

RESTRICTED TO

SCALE
NTS

SHEET
1 OF 2

REV
D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1938323-2](#)