

LVSP SURGE SUPPRESSION FUSE

600 Vac • 5-100 kA





Description

The Littelfuse® Varistor Protection (LVSP) Fuses are intended for the protection of TVSS products. The LVSP series has been designed to survive the 8 x 20 μs lightning surges described in various standards (UL 1449, IEC 61000-4-5 and IEEE C62.41) without opening. This allows the TVSS to perform the necessary suppression. The LVSP is not rated for continuous current and the ratings are specific 8 x 20 μs surge capability. The LVSP series can be used to facilitate TVSS module compliance to UL 1449 in permanently connected applications (abnormal overvoltage, unlimited current conditions).

Features/Benefits

- Very current limiting under AC short-circuit conditions
- Available in multiple mounting configurations (cartridge, bolt-in, PC board mount)
- Provides short circuit protection in TVSS systems and complements the Littelfuse line of overvoltage products (HA, HB34, TMOV® and iTMOV® varistors as well as the AK-10 series TVS diodes)

Applications

- TVSS products
- Surge arrestors


Specifications

Voltage Rating 600 Vac **Interrupting Rating** 200 kA

Ratings $5-100 \text{ kA } 8 \times 20 \text{ } \mu \text{s}$ surge withstand **Approvals** UL Recognized (File: E71611)

Environmental RoHs Compliant

Part Numbering System



SERIES	SURGE RATING	RATING CODE	PACKAGE QUANTITY	MOUNTING METHOD	CATALOG NUMBER	ORDERING NUMBER
LVSP	5	0005	10	CARTRIDGE	LVSP05-2	LVSP0005TX2
LVSP	15	0015	10	CARTRIDGE	LVSP15-2	LVSP0015TX2
LVSP	20	0020	100	LEADED	LVSP20-R	LVSP0020HXR
LVSP	80	0800	10	BOLT-IN	LVSP80	LVSP0080T

Recommended Fuse Blocks

LVSP (5-20)-2

L60030M (open block) • LPSM (dead front)

LVSP (30-80)-2

LFJ60030 (open block) • LFPSJ30 (dead front)

LVSP (100)

LFJ60100 (open block)

Web Resources

Download other technical information:

littelfuse.com/lvsp

Electrical Specifications


SURGE RATING	RATING CODE	VOLTAGE RATING (A)	INTERRUPT RATING (KA)	CARTRIDGE		LEADED		BOLT-IN		8 X 20 μS	NOMINAL	NOMINAL	lpeak@100 kA
				CATALOG NUMBER	ORDERING NUMBER	CATALOG NUMBER	ORDERING NUMBER	CATALOG NUMBER	ORDERING NUMBER	SURGE RATING	MELTING I ² T (A ² S)	CLEARING I ² T (A ² S)	60 HZ (A)
5	0005	600	200	LVSP5-2	LVSP0005TX2	LVSP5-R	LVSP0005TXR	-	_	5,000	359	981	3,700
10	0010	600	200	LVSP10-2	LVSP0010TX2	LVSP10-R	LVSP0010TXR	-	_	10,000	1,300	3,210	5,823
15	0015	600	200	LVSP15-2	LVSP0015TX2	LVSP15-R	LVSP0015TXR	-	-	15,000	3,267	6,235	7,765
20	0020	600	200	LVSP20-2	LVSP0020TX2	LVSP20-R	LVSP0020TXR	-	_	20,000	4,940	11,710	8,135
30	0030	600	200	LVSP30-2	LVSP0030TX2	-	-	LVSP30	LVSP0030T	30,000	11,950	35,325	12,478
40	0040	600	200	LVSP40-2	LVSP0040TX2	_	_	LVSP40	LVSP0040T	40,000	20,550	61,700	15,250
60	0060	600	200	LVSP60-2	LVSP0060TX2	-	-	LVSP60	LVSP0060T	60,000	39,240	145,555	19,604
80	0080	600	200	LVSP80-2	LVSP0080TX2	_	_	LVSP80	LVSP0080T	80,000	75,000	254,000	24,600
100	0100	600	200	_	_	-	_	LVSP100-L	LVSP0100VXL	100,000	Contact Factory		




LVSP SURGE SUPPRESSION FUSE

Dimensions Inches (mm)


Cartridge 5-20 A




Leaded 5-20 A




Cartridge 30-80 A



Bolt-In 30-80 A

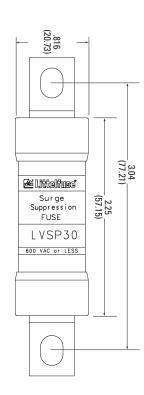

Bolt-In 100 A

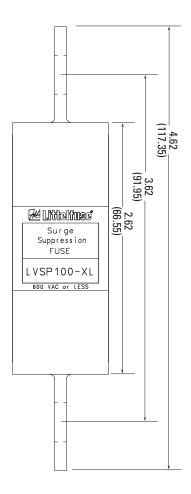

Disclaimer Notice – Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/product-disclaimer.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

 LVSP0100VXL
 LVSP0030T
 LVSP0080TX2
 LVSP0040T
 LVSP0015TX2
 LVSP0020TX2
 LVSP0060T

 LVSP0030TX2
 LVSP0100TX2
 LVSP0005TX2
 LVSP0015TXR
 LVSP0040HXP
 LVSP0100T
 LVSP0005HXR

 LVSP40-2
 LVSP0020TXR
 LVSP0010TXR
 LVSP0060TX2
 LVSP0080T
 LVSP0005TXR
 LVSP0010TX2

 LVSP0040TX2
 LVSP0005HX2
 LVSP0010HX2
 LVSP0015HX2
 LVSP0015HXR
 LVSP0020HX2

 LVSP0020HXR
 LVSP0030HX2
 LVSP0040HX2
 LVSP0060HX2
 LVSP0080HX2