

REV. 0

DCO 17223

COIL: @ 25°C

2500 OHMS ± 10%

RESISTANCE

11.2 mA DC

NOMINAL VOLTAGE

5.6 mA DC

MUST OPERATE

0.6 mA DC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's - 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX.


RELEASE 3 MS MAX.

CONTACT BOUNCE 3 MS MAX.

CUST. HI-G

CUST. NO. 2BCN-1E-128 REV. 3

CUSTOMER DATA SHEET

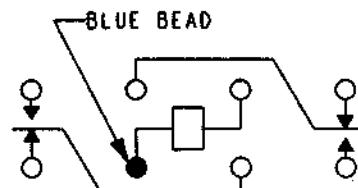

TERMINAL VIEW

CONTACT RATING: 5A 30 VDC
3A 115 VAC 400 Hz RESISTIVE,
100,000 OPERATIONS

DR. B.D. 8/24/01

CK. TLG 8-24-01

CII Technologies
advanced control electronic solutions

SF5A5105J02

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[SF5A5105J02](#)