


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D2	ADD DASH NUMBER	27JUN2017	P.Z	R.S

D

C

B

A

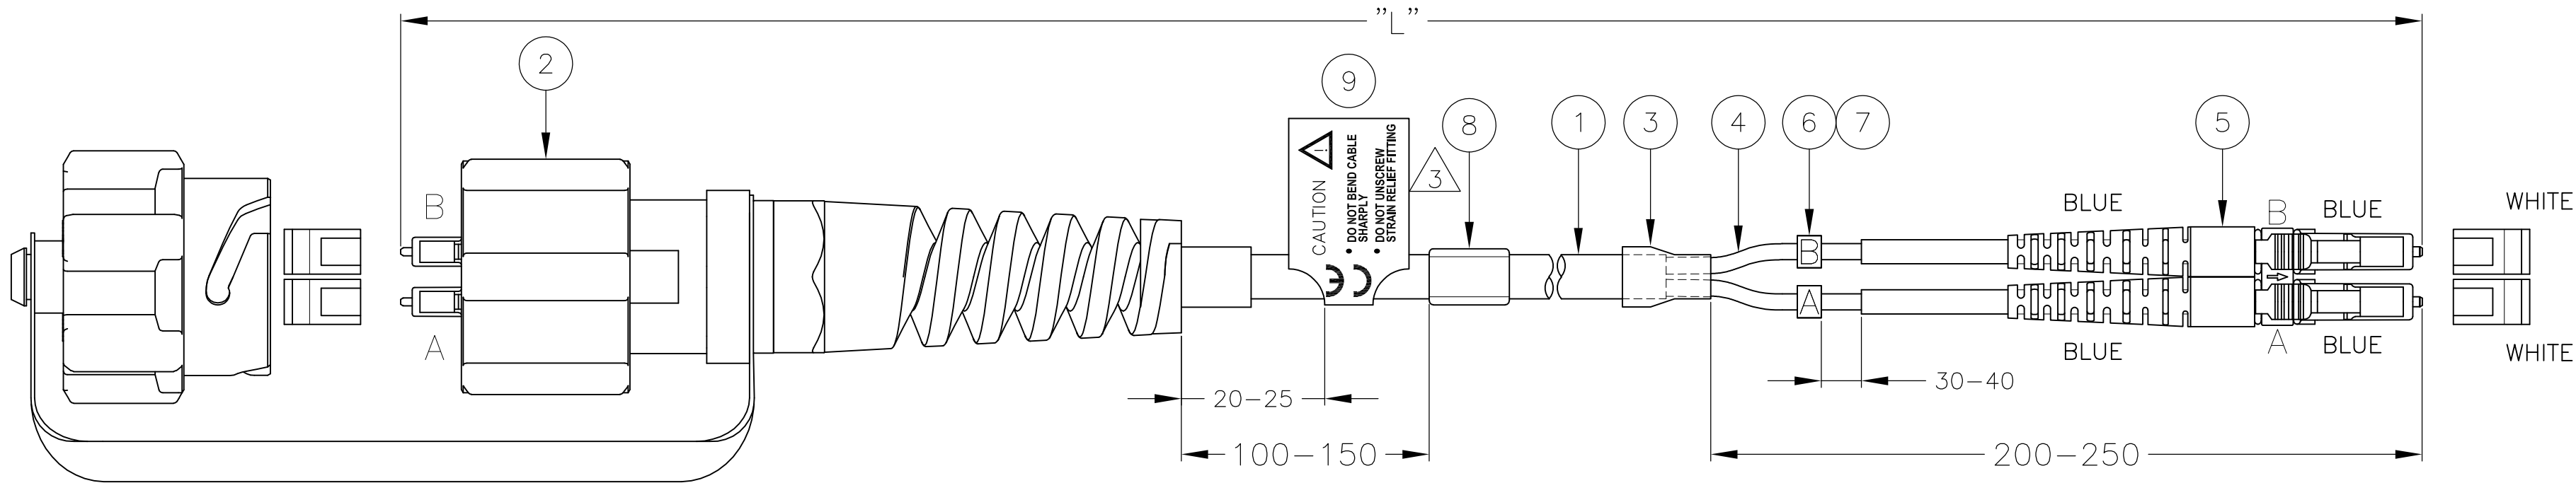

FIBER CONNECTIVITY	
ODVA	LC/DPX
A	A
B	B

NOTES:

- 1

MAXIMUM CONNECTOR ATTENUATION IS 0.3 dB PLUS CABLE ATTENUATION OF 0.5 dB/km AT 1310 nm (SEE TABLE)
- 2

FILLED OUT TEST RESULT SHEET SUPPLIED WITH EACH INDIVIDUALLY PACKED ASSEMBLY
- 3

INFORMATION ON LABEL SEE DETAIL:
 - BARCODE
 - UNIQUE SERIAL NUMBER
 - ASSEMBLY LENGTH
 - TE CONNECTIVITY PART NUMBER
 - TE CONNECTIVITY ORDER NUMBER
- 4

CABLE INFORMATION:
 - FIBER CORE DIAMETER: 9/125 μm
 - OUTER JACKET DIAMETER: 5.5 mm
 - OUTER JACKET COLOUR: BLACK
 - OUTER JACKET MATERIAL: FLAME RETARDANT TPU
- 5

ENVIRONMENTAL PERFORMANCE
 - 40°C TO +85°C
- 6



IP67 RATED
- 7

CABLE, EXTERNAL PLUG COMPONENTS AND CAP ARE UV STABLE

LABEL DETAIL: 3



PART NUMBER	"L" (METER)		MAXIMUM ¹ ATTENUATION (dB)
	MIN	MAX	
2061348-2	1.85	2.15	0.30
2061348-5	4.85	5.15	0.30
1-2061348-0	9.85	10.15	0.30
1-2061348-5	14.80	15.20	0.31
2-2061348-0	19.80	20.20	0.31
3-2061348-0	29.50	30.50	0.31
3-2061348-5	34.50	35.50	0.32
4-2061348-5	44.50	45.50	0.33
5-2061348-0	49.50	50.50	0.33
6-2061348-0	59.00	61.00	0.34
7-2061348-0	69.00	71.00	0.34
7-2061348-5	74.00	76.00	0.34
8-2061348-0	79.00	81.00	0.35
8-2061348-5	84.00	86.00	0.35
9-2061348-0	89.00	91.00	0.35
9-2061348-9	99.00	101.00	0.35
8-2061348-1	118.8	121.2	0.36
8-2061348-3	178.0	182.0	0.40
8-2061348-4	247.0	253.0	0.44
8-2061348-2	297.0	303.0	0.45

1	FOAC ODVA WARNING LABEL WITH CE-MARKING	9			
1	FOAC INFORMATION LABEL	8			
1	LABEL "B"	7			
1	LABEL "A"	6			
1	LC DUPLEX CONNECTOR ASSEMBLY, SINGLE MODE, BLUE	5			
2	FOAC PROTECTIVE TUBING, BLACK	4			
1	FOAC HEAT SHRINK TUBING, BLACK	3			
1	PLUG SUBASSY, LC ODVA INDUSTRIAL CONNECTOR, WITH CAP	2			
L	FOCAB 5.5 mm 2FOLD, SINGLE MODE 9/125, BLACK	1			
Qty	Description	Item			
THIS DRAWING IS A CONTROLLED DOCUMENT.					
DWN R. COOLEN 11DEC2009		 TE Connectivity			
CHK M. JANSEN 26AUG2010					
APVD J. VERHOEVEN 26AUG2010					
PRODUCT SPEC					
APPLICATION SPEC		NAME FIBER OPTIC LEAD 5.5 mm LC/DPX WITH ODVA ADAPTER – LC/DPX SINGLE MODE 9/125			
MATERIAL					
FINISH					
CUSTOMER DRAWING					
DIMENSIONS: mm		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		A2	00779	C=2061348	—
TOLERANCES UNLESS OTHERWISE SPECIFIED:		SCALE NTS SHEET 1 OF 1 REV D2			
0 PLC ± -					
1 PLC ± -					
2 PLC ± -					
3 PLC ± -					
4 PLC ± -					
ANGLES ± -					
WEIGHT 0.000000					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[9-2061348-9](#)