

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		L	REVISED PER ECO-14-000066	26JUN2014	NK	MM

- 1

THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING.
- 2

SELECTIVE POSTS ARE FORMED TO PROVIDE CONNECTOR RETETNTION TO PC BOARD UNTIL SOLDERED. RETENTION FEATURE IS FOR .055 MINIMUM PC BOARD THICKNESS. SEE DETAIL Z FOR FORM AND TABLE FOR LOCATIONS.
- 3

BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT.
- 4

PARTS TO BE PACKAGED IN TUBES.
- 5



FINISH: .000100-.000200 MATTE TIN LEAD OVER .000050 NICKEL ON ENTIRE POST.
- 6

FINISH:.000100-.000200 BRIGHT TIN OVER .000050 NICKEL ON ENTIRE POST.
- 7

PRELIMINARY PART-NOT RELEASED FOR PRODUCTION.
- 8

FINISH: .000100-.000200 MATTE TIN OVER .000050 NICKEL ON ENTIRE POST.
- 9

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

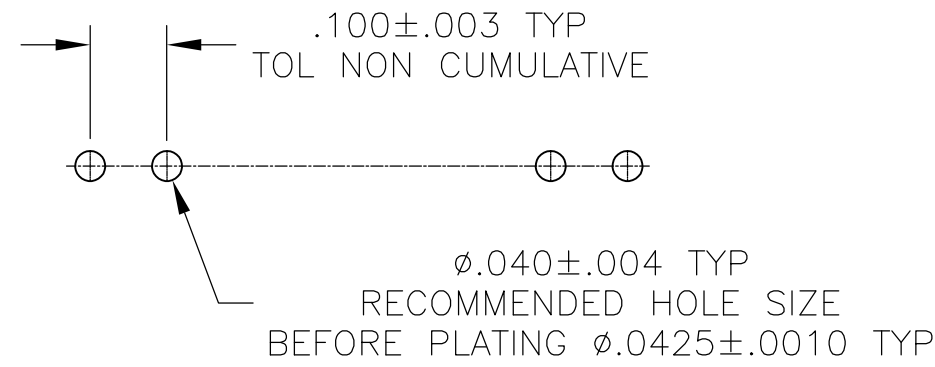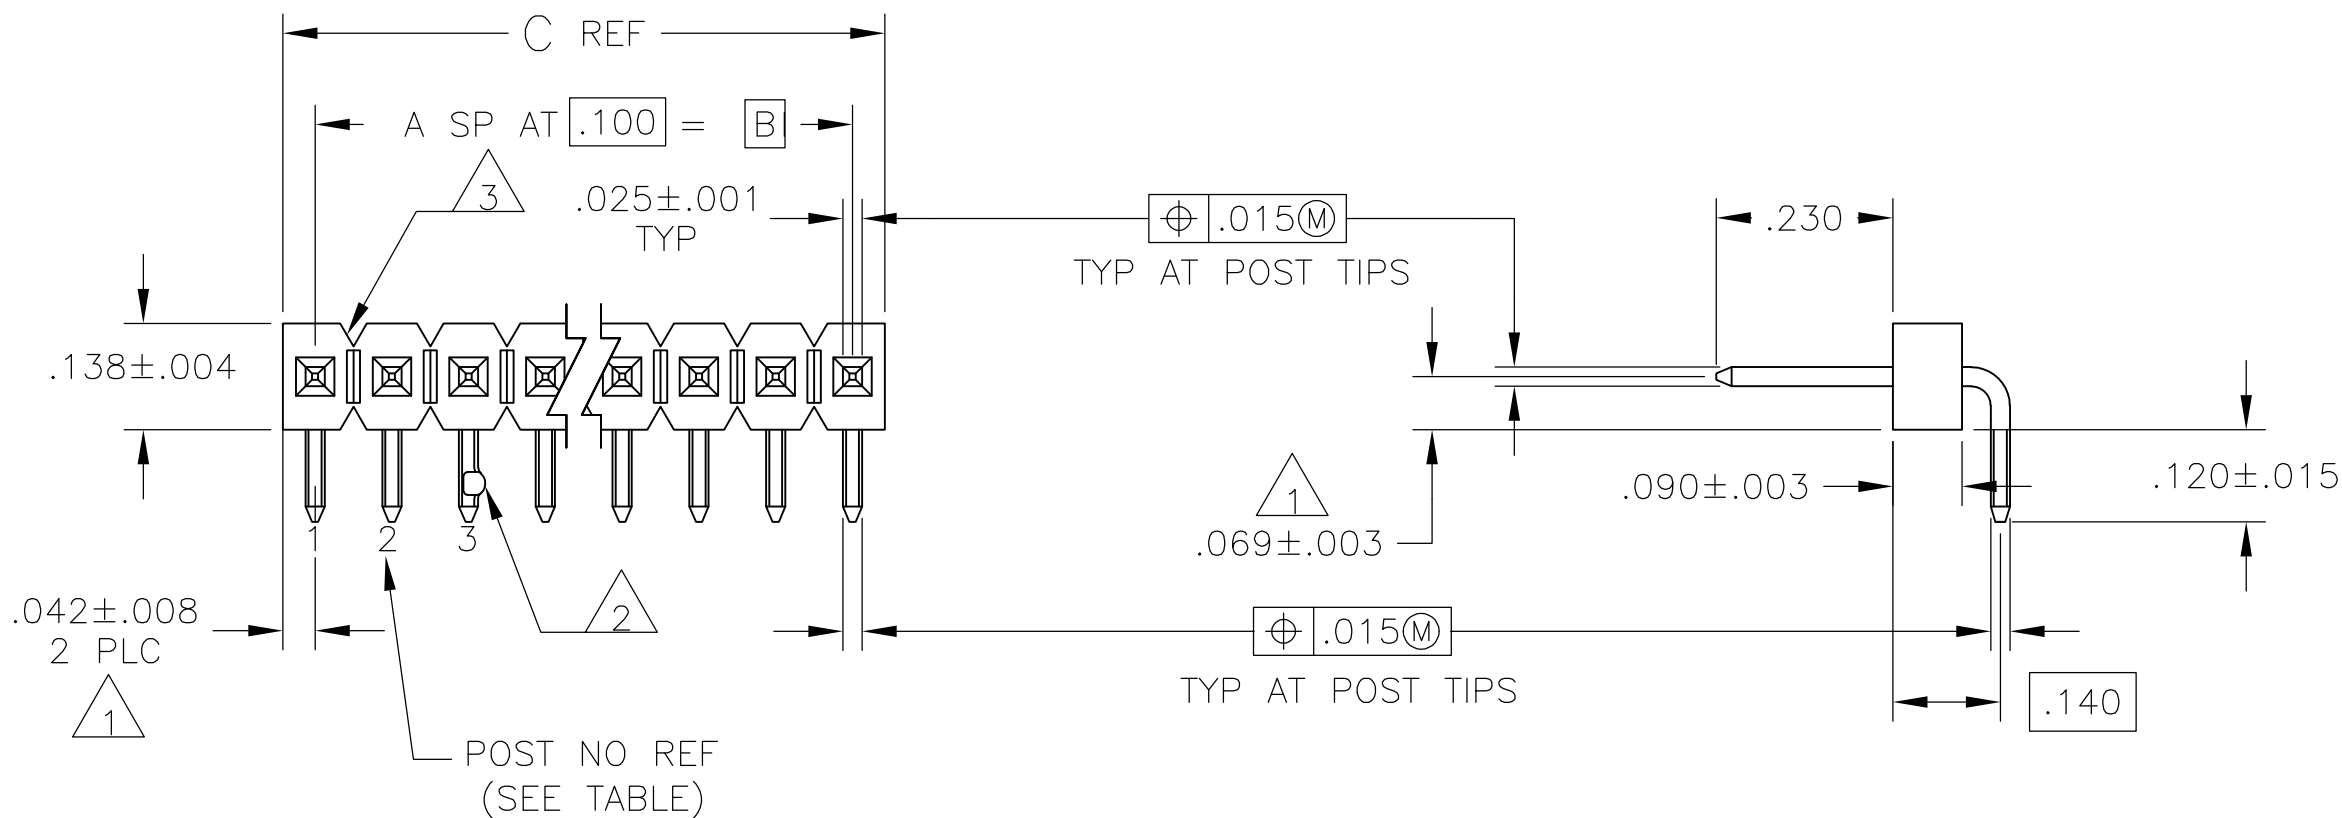

DETAIL Z
POST DETAIL TYP
2 POST MINIMUM
SCALE 10:1

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

M. PASTAL

4FEB88

CHK

R. FEIDT

9FEB88

APVD

M. PASTAL

9FEB88

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:

INCHES

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

FINISH

± -

± -

± -

± .005

± -

± -

SEE TABLE

TE Connectivity

HEADER ASSY, MOD II, BREAKAWAY, RIGHT ANGLE, SINGLE ROW, .100 C/L, .025 SQ. POSTS, W/HOLD-DOWN CONFIG

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2

00779

C=104349

SCALE

4:1

SHEET

1 of 2

REV

L

1471-9 (3/11)

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , -
© COPYRIGHT - By -	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

4	OBSOLETE		1,2,3,4,26,27,28,29	2.884	2.800	28	29	7-104349-9
	OBSOLETE		1,2,3,4,6,7,8,9	.884	.800	8	9	7-104349-8
			1,2,3,4,37,38,39,40	3.984	3.900	39	40	7-104349-7
	OBSOLETE		1,2,3,4,32,33,34,35	3.484	3.400	34	35	7-104349-6
	OBSOLETE		1,2,3,4,27,28,29,30	2.984	2.900	29	30	7-104349-5
	OBSOLETE		1,2,3,4,23,24,25,26	2.584	2.500	25	26	7-104349-4
	OBSOLETE		1,2,3,4,22,23,24,25	2.484	2.400	24	25	7-104349-3
	OBSOLETE		1,2,3,4,21,22,23,24	2.384	2.300	23	24	7-104349-2
	OBSOLETE		1,2,3,4,20,21,22,23	2.284	2.200	22	23	7-104349-1
	OBSOLETE		1,2,3,4,19,20,21,22	2.184	2.100	21	22	7-104349-0
	OBSOLETE		1,2,3,4,18,19,20,21	2.084	2.000	20	21	6-104349-9
			1,2,3,4,17,18,19,20	1.984	1.900	19	20	6-104349-8
	OBSOLETE		1,2,3,4,16,17,18,19	1.884	1.800	18	19	6-104349-7
	OBSOLETE		1,2,3,4,15,16,17,18	1.784	1.700	17	18	6-104349-6
	OBSOLETE		1,2,3,4,14,15,16,17	1.684	1.600	16	17	6-104349-5
	OBSOLETE		1,2,3,4,13,14,15,16	1.584	1.500	15	16	6-104349-4
	OBSOLETE		1,2,3,4,12,13,14,15	1.484	1.400	14	15	6-104349-3
	OBSOLETE		1,2,3,4,11,12,13,14	1.384	1.300	13	14	6-104349-2
	OBSOLETE		1,2,3,4,10,11,12,13	1.284	1.200	12	13	6-104349-1
	OBSOLETE		1,2,3,4,9,10,11,12	1.184	1.100	11	12	6-104349-0
	OBSOLETE		1,2,3,4,8,9,10,11	1.084	1.000	10	11	5-104349-9
	OBSOLETE		1,2,3,4,7,8,9,10	.984	.900	9	10	5-104349-8
	OBSOLETE		1,2,3,4,6,7,8,9	.884	.800	8	9	5-104349-7
			ALL	.784	.700	7	8	5-104349-6
OBSOLETE		ALL	.684	.600	6	7	5-104349-5	
OBSOLETE		ALL	.584	.500	5	6	5-104349-4	
OBSOLETE		ALL	.484	.400	4	5	5-104349-3	
OBSOLETE		ALL	.384	.300	3	4	5-104349-2	
		ALL	.284	.200	2	3	5-104349-1	
	PLATING	HOLD-DOWN POST CONFIGURATION LOCATION	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	

			ALL	.584	.500	5	6	3-104349-0
	OBSOLETE		1,2,3,4,26,27,28,29	2.884	2.800	28	29	2-104349-9
	OBSOLETE		1,2,3,4,6,7,8,9	.884	.800	8	9	2-104349-8
			1,2,3,4,37,38,39,40	3.984	3.900	39	40	2-104349-7
	OBSOLETE		1,2,3,4,32,33,34,35	3.484	3.400	34	35	2-104349-6
	OBSOLETE		1,2,3,4,27,28,29,30	2.984	2.900	29	30	2-104349-5
	OBSOLETE		1,2,3,4,23,24,25,26	2.584	2.500	25	26	2-104349-4
	OBSOLETE		1,2,3,4,22,23,24,25	2.484	2.400	24	25	2-104349-3
	OBSOLETE		1,2,3,4,21,22,23,24	2.384	2.300	23	24	2-104349-2
	OBSOLETE		1,2,3,4,20,21,22,23	2.284	2.200	22	23	2-104349-1
	OBSOLETE		1,2,3,4,19,20,21,22	2.184	2.100	21	22	2-104349-0
	OBSOLETE		1,2,3,4,18,19,20,21	2.084	2.000	20	21	1-104349-9
			1,2,3,4,17,18,19,20	1.984	1.900	19	20	1-104349-8
	OBSOLETE		1,2,3,4,16,17,18,19	1.884	1.800	18	19	1-104349-7
	OBSOLETE		1,2,3,4,15,16,17,18	1.784	1.700	17	18	1-104349-6
	OBSOLETE		1,2,3,4,14,15,16,17	1.684	1.600	16	17	1-104349-5
	OBSOLETE		1,2,3,4,13,14,15,16	1.584	1.500	15	16	1-104349-4
	OBSOLETE		1,2,3,4,12,13,14,15	1.484	1.400	14	15	1-104349-3
	OBSOLETE		1,2,3,4,11,12,13,14	1.384	1.300	13	14	1-104349-2
	OBSOLETE		1,2,3,4,10,11,12,13	1.284	1.200	12	13	1-104349-1
	OBSOLETE		1,2,3,4,9,10,11,12	1.184	1.100	11	12	1-104349-0
	OBSOLETE		1,2,3,4,8,9,10,11	1.084	1.000	10	11	104349-9
	OBSOLETE		1,2,3,4,7,8,9,10	.984	.900	9	10	104349-8
	OBSOLETE		1,2,3,4,6,7,8,9	.884	.800	8	9	104349-7
			ALL	.784	.700	7	8	104349-6
	OBSOLETE		ALL	.684	.600	6	7	104349-5
			ALL	.584	.500	5	6	104349-4
			ALL	.484	.400	4	5	104349-3
			ALL	.384	.300	3	4	104349-2
			ALL	.284	.200	2	3	104349-1
		PLATING	HOLD-DOWN POST CONFIGURATION LOCATION	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. PASTAL 4FEB88		 TE Connectivity					
		CHK R. FEIDT 9FEB88							
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. PASTAL 9FEB88		NAME			
		0 PLC ± -		PRODUCT SPEC		HEADER ASSY, MOD II, BREAKAWAY, RIGHT ANGLE, SINGLE ROW, .100 C/L, .025 SQ. POSTS, W/HOLD-DOWN CONFIG			
		1 PLC ± -		—					
		2 PLC ± -		—					
		3 PLC ± .005		APPLICATION SPEC					
		4 PLC ± -		—					
MATERIAL —		FINISH SEE TABLE		WEIGHT —		SIZE A2	CAGE CODE 00779	DRAWING NO C-104349	RESTRICTED TO —
CUSTOMER DRAWING						SCALE 4:1	SHEET 2 of 2	REV L	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-104349-0](#)