

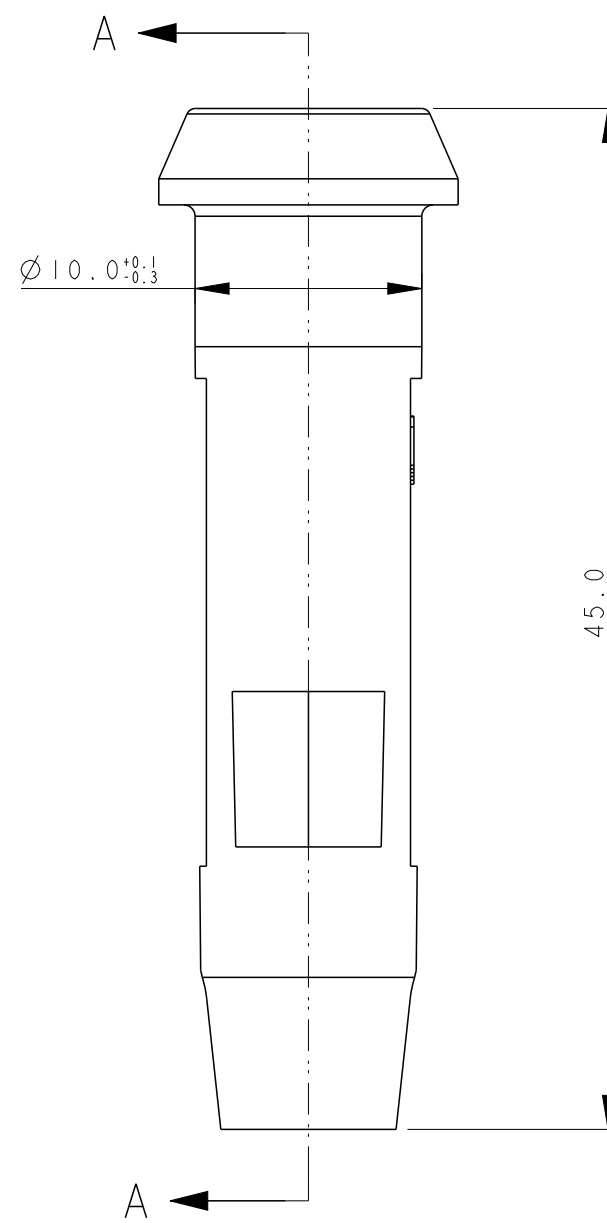


SECTION A - A
(SEZIONE)

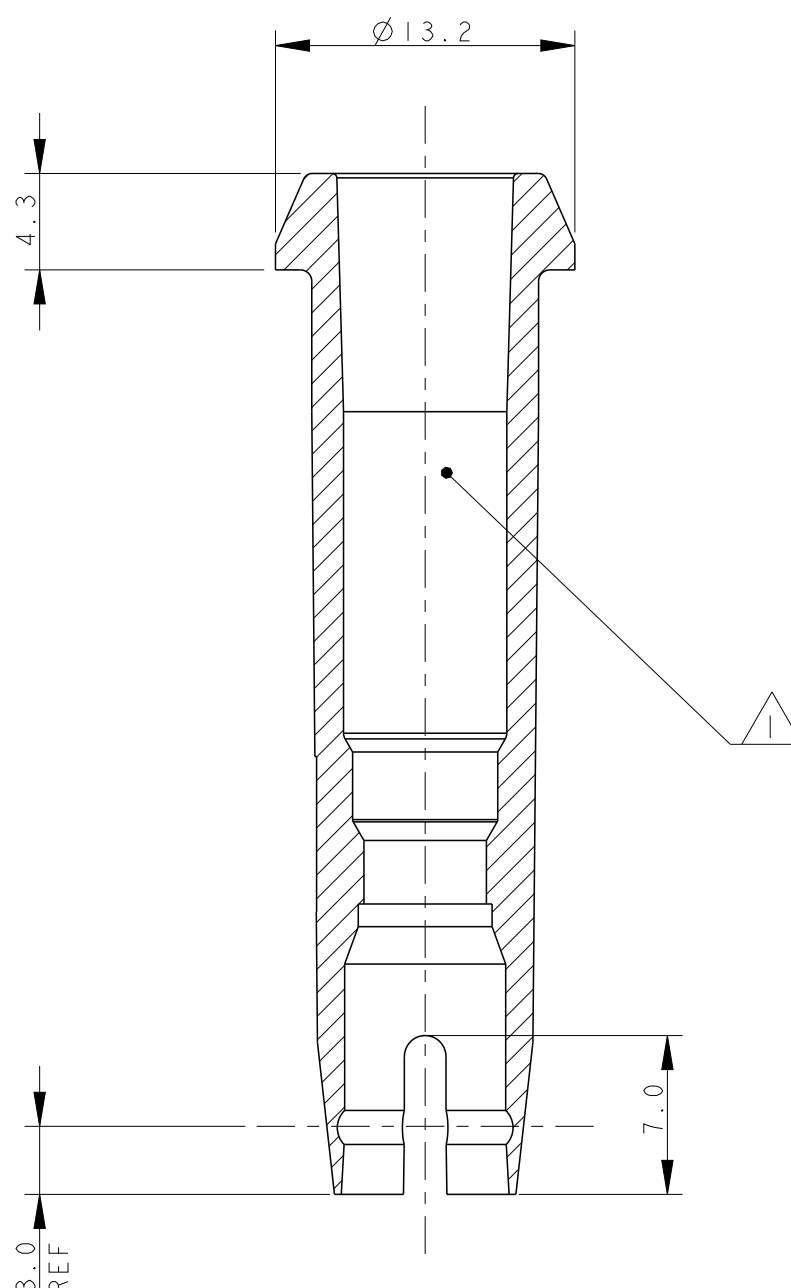

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APV
	B1	REVISED PER ECO-15-015744	02NOV2015	M. P.	M. G
	B2	REVISED PER ECO-15-018091	16DEC2015	M. P.	M. G
	B3	REVISED PER ECO-16-002840	29FEB2016	M. P.	M. G
	B4	REVISED PER ECO-16-008847	13JUN2016	M. P.	M. G

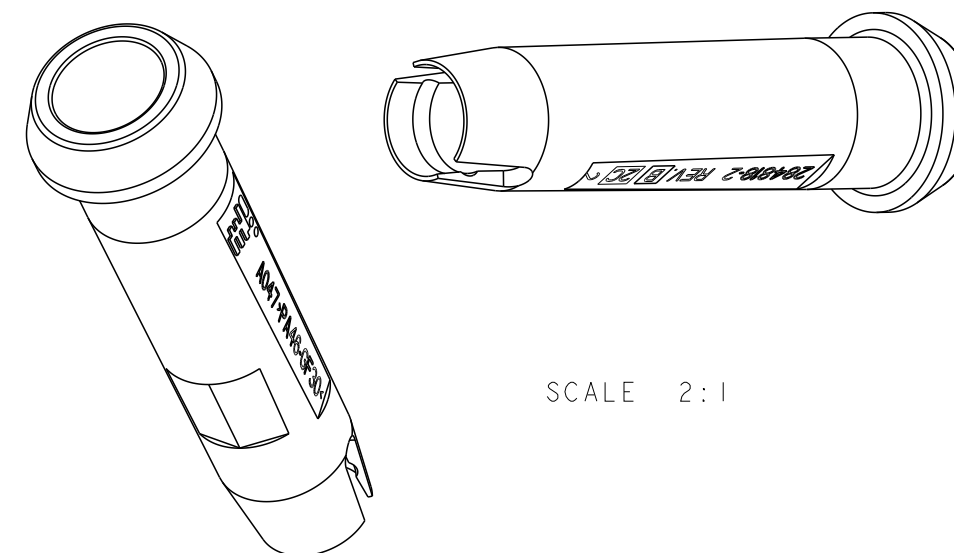

SCALE 2:1

 CAVITY SUITABLE FOR SOCKET CONTACT 4.0 DIA. SYSTEM:
- P/N 962954-2 AND SINGLE WIRE SEAL P/N 963244-1
FOR 2.5 mm² WIRE
- P/N 962956-2 AND SINGLE WIRE SEAL P/N 963245-1
FOR 4.0 mm² WIRE

(CAVITA' ADATTA PER CONTATTO FEMMINA 4.0 DIA. SYSTEM:
- P/N 962954-2 E GOMMINO PASSACAVO P/N 963244-1
PER CAVO 2.5 mm².
- P/N 962956-2 E GOMMINO PASSACAVO P/N 963245-1
PER CAVO 4.0 mm².)

2 INTERFACE DRAWING ACCORDING TO FIAT SPEC.
91317/42 SHEET 1 PAGE 3

PA 46 - GF 30	RED (ROSSO)	HOUSING (BLOCCETTO)	284818-2	B
PA 46 - GF 30	BLACK (NERO)	HOUSING (BLOCCETTO)	284818-1	B
MATERIAL (MATERIALE)	COLOUR (COLORE)	DESCRIPTION (DESCRIZIONE)	PART NUMBER	REV.

P/N 284818-1 AND -2 AS SHOWN
(P/N 284818-1 E -2 COME INDICATO)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. ZAMPIROLO 21MAR2001		 TE Connectivity					
DIMENSIONS: mm		CHK R. MARTINI 21MAR2001							
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.3 1 PLC ±0.3 2 PLC ±0.3 3 PLC ± 4 PLC ± ANGLES ±1°		APVD A. GENTA 21MAR2001		NAME I W HOUSING FOR DIESEL GLOW PLUG STRAIGHT VERSION (CONNETTORE I VIA PER CANDELETTE PRE-RISCALDO)				
			PRODUCT SPEC 108-20229						
			APPLICATION SPEC -						
			SIZE A3						CAGE CODE -
MATERIAL SEE TABLE (VED. TABELLA)		FINISH ---		WEIGHT 2.15 g					
Customer Drawing						SCALE 3:1	SHEET 1	OF 1	REV B4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[284818-1](#)