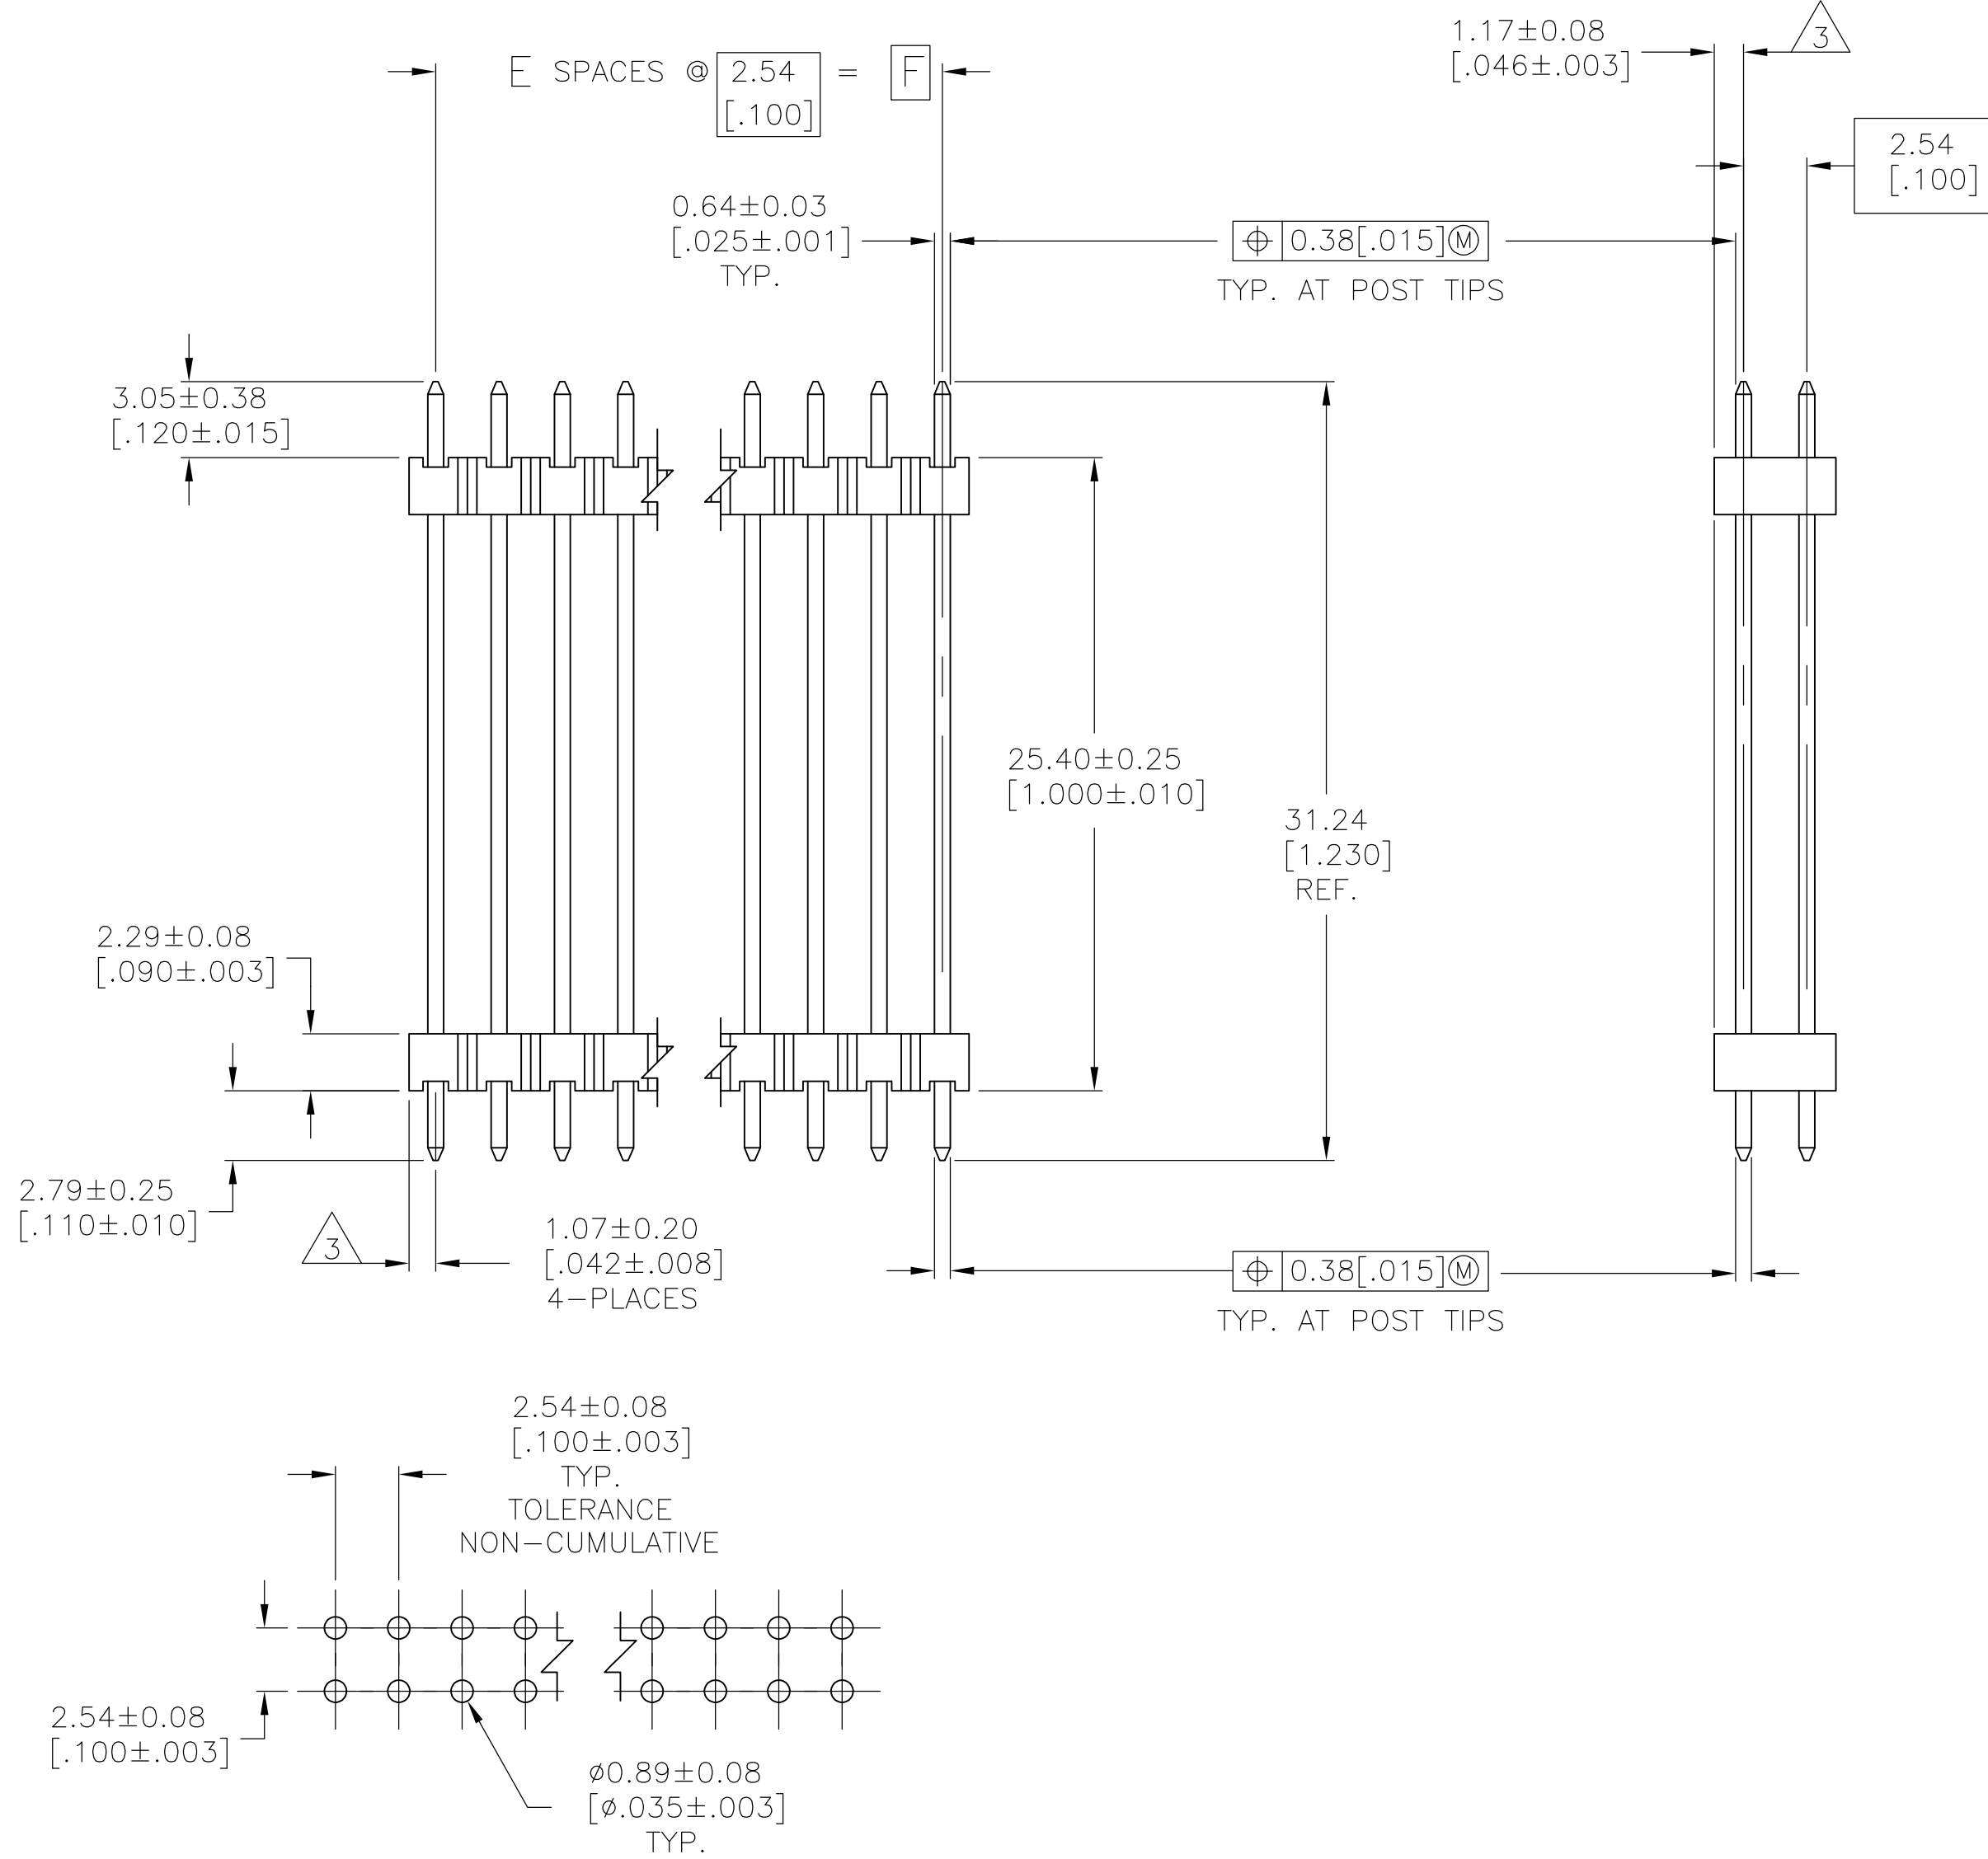
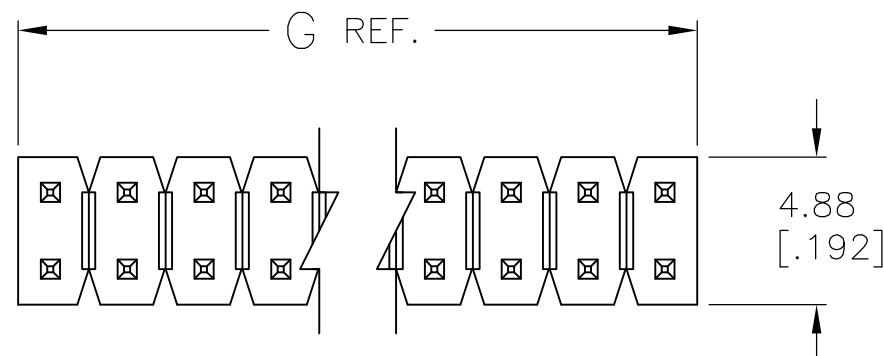




RECOMMENDED HOLE LAYOUT





1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD

 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING

4 HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.

5 FINISH: 0.00254-0.00508 [.000100-.000200] BRIGHT TIN-LEAD
OVER 0.00127 [.000050] NICKEL ENTIRE POST.

△6 FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN
OVER 0.00127 [.000050] NICKEL ENTIRE POST.

	101.19 [3.984]	99.06 [3.900]	39	80	9-146502-0
	98.65 [3.884]	96.52 [3.800]	38	78	8-146502-9
	96.11 [3.784]	93.98 [3.700]	37	76	8-146502-8
	93.57 [3.684]	91.44 [3.600]	36	74	8-146502-7
	91.03 [3.584]	88.90 [3.500]	35	72	8-146502-6
	88.49 [3.484]	86.36 [3.400]	34	70	8-146502-5
	85.95 [3.384]	83.82 [3.300]	33	68	8-146502-4
	83.41 [3.284]	81.28 [3.200]	32	66	8-146502-3
	80.87 [3.184]	78.74 [3.100]	31	64	8-146502-2
	78.33 [3.084]	76.20 [3.000]	30	62	8-146502-1
	75.79 [2.984]	73.66 [2.900]	29	60	8-146502-0
	73.25 [2.884]	71.12 [2.800]	28	58	7-146502-9
	70.71 [2.784]	68.58 [2.700]	27	56	7-146502-8
	68.17 [2.684]	66.04 [2.600]	26	54	7-146502-7
	65.63 [2.584]	63.50 [2.500]	25	52	7-146502-6
	63.09 [2.484]	60.96 [2.400]	24	50	7-146502-5
	60.55 [2.384]	58.42 [2.300]	23	48	7-146502-4
	58.01 [2.284]	55.88 [2.200]	22	46	7-146502-3
	55.47 [2.184]	53.34 [2.100]	21	44	7-146502-2
	52.93 [2.084]	50.80 [2.000]	20	42	7-146502-1
	50.39 [1.984]	48.26 [1.900]	19	40	7-146502-0
	47.85 [1.884]	45.72 [1.800]	18	38	6-146502-9
	45.31 [1.784]	43.18 [1.700]	17	36	6-146502-8
	42.77 [1.684]	40.64 [1.600]	16	34	6-146502-7
	40.23 [1.584]	38.10 [1.500]	15	32	6-146502-6
	37.69 [1.484]	35.56 [1.400]	14	30	6-146502-5
	35.15 [1.384]	33.02 [1.300]	13	28	6-146502-4
	32.61 [1.284]	30.48 [1.200]	12	26	6-146502-3
	30.07 [1.184]	27.94 [1.100]	11	24	6-146502-2
	27.53 [1.084]	25.40 [1.000]	10	22	6-146502-1
	24.99 [.984]	22.86 [.900]	9	20	6-146502-0
	22.45 [.884]	20.32 [.800]	8	18	5-146502-9
	19.91 [.784]	17.78 [.700]	7	16	5-146502-8
	17.37 [.684]	15.24 [.600]	6	14	5-146502-7
	14.83 [.584]	12.70 [.500]	5	12	5-146502-6
	12.29 [.484]	10.16 [.400]	4	10	5-146502-5
	9.75 [.384]	7.62 [.300]	3	8	5-146502-4
	7.21 [.284]	5.08 [.200]	2	6	5-146502-3
	4.67 [.184]	2.54 [.100]	1	4	5-146502-2
	2.13 [.084]	-	-	2	5-146502-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

5	101.19 [3.984]	99.06 [3.900]	39	80	4-146502-0
5	98.65 [3.884]	96.52 [3.800]	38	78	3-146502-9
5	96.11 [3.784]	93.98 [3.700]	37	76	3-146502-8
5	93.57 [3.684]	91.44 [3.600]	36	74	3-146502-7
5	91.03 [3.584]	88.90 [3.500]	35	72	3-146502-6
5	88.49 [3.484]	86.36 [3.400]	34	70	3-146502-5
5	85.95 [3.384]	83.82 [3.300]	33	68	3-146502-4
5	83.41 [3.284]	81.28 [3.200]	32	66	3-146502-3
5	80.87 [3.184]	78.74 [3.100]	31	64	3-146502-2
5	78.33 [3.084]	76.20 [3.000]	30	62	3-146502-1
5	75.79 [2.984]	73.66 [2.900]	29	60	3-146502-0
5	73.25 [2.884]	71.12 [2.800]	28	58	2-146502-9
5	70.71 [2.784]	68.58 [2.700]	27	56	2-146502-8
5	68.17 [2.684]	66.04 [2.600]	26	54	2-146502-7
5	65.63 [2.584]	63.50 [2.500]	25	52	2-146502-6
5	63.09 [2.484]	60.96 [2.400]	24	50	2-146502-5
5	60.55 [2.384]	58.42 [2.300]	23	48	2-146502-4
5	58.01 [2.284]	55.88 [2.200]	22	46	2-146502-3
5	55.47 [2.184]	53.34 [2.100]	21	44	2-146502-2
5	52.93 [2.084]	50.80 [2.000]	20	42	2-146502-1
5	50.39 [1.984]	48.26 [1.900]	19	40	2-146502-0
5	47.85 [1.884]	45.72 [1.800]	18	38	1-146502-9
5	45.31 [1.784]	43.18 [1.700]	17	36	1-146502-8
5	42.77 [1.684]	40.64 [1.600]	16	34	1-146502-7
5	40.23 [1.584]	38.10 [1.500]	15	32	1-146502-6
5	37.69 [1.484]	35.56 [1.400]	14	30	1-146502-5
5	35.15 [1.384]	33.02 [1.300]	13	28	1-146502-4
5	32.61 [1.284]	30.48 [1.200]	12	26	1-146502-3
5	30.07 [1.184]	27.94 [1.100]	11	24	1-146502-2
5	27.53 [1.084]	25.40 [1.000]	10	22	1-146502-1
5	24.99 [.984]	22.86 [.900]	9	20	1-146502-0
5	22.45 [.884]	20.32 [.800]	8	18	146502-9
5	19.91 [.784]	17.78 [.700]	7	16	146502-8
5	17.37 [.684]	15.24 [.600]	6	14	146502-7
5	14.83 [.584]	12.70 [.500]	5	12	146502-6
5	12.29 [.484]	10.16 [.400]	4	10	146502-5
5	9.75 [.384]	7.62 [.300]	3	8	146502-4
5	7.21 [.284]	5.08 [.200]	2	6	146502-3
5	4.67 [.184]	2.54 [.100]	1	4	146502-2
5	2.13 [.084]	-	-	2	146502-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE 11-NOV-96 DRAWN BY BRANDBERG		 TE Connectivity	
		CHK'D G. DUBNICZKI APPROV'D G. DUBNICZKI			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLOC ± 2 PLOC ± 2 PLOC ± 0.51[.02] 0.0107[.003] 4 PLOC ± 0.0127[.0005] ANGLES ±		NAME	
		PRODUCT SPEC		HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SO. POST, UNSHROUDED	
MATERIAL		APPLICATION SPEC		SIZE	CAGE CODE
		FINISH		DRAWING NO	
SEE TABLE		WEIGHT		A1 00779	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV A	
				RESTRICTED TO	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-146502-6](#)