
REVISIONS					
REV	DESCRIPTION	DATE			
R	REVISED PER DCR NO. R060216	03/30/2006			
R1	REVISED PER ECO-10-000443	15JAN10			



1

TUBING VFP21 MARKED AS SHOWN IN WHITE CHARACTERS ON SURFACE INDICATED.

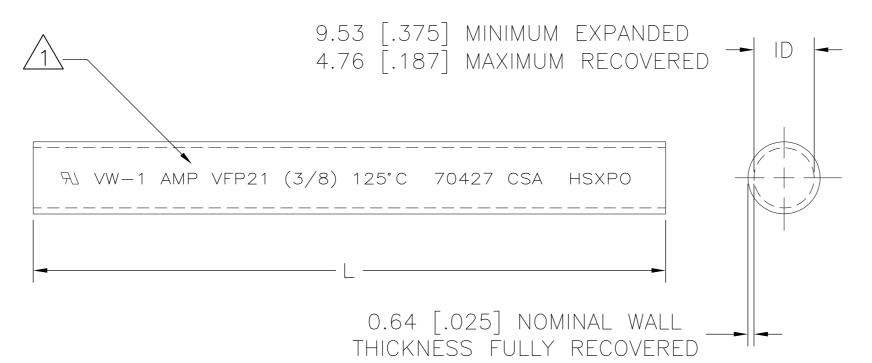

TUBING VFP21 IS UL RECOGNIZED, IS RATED 125°C [257°F], 600 V AND MEETS VW-1 FLAME TEST.



TUBING VFP21 IS CSA CERTIFIED AND MEETS VW-1 FLAME TEST.



TUBING FP21 IS UNMARKED AND MEETS
REQUIREMENTS OF AMS-DTL-23053/5-107-0

- 5. WEIGHT PER LINEAR FOOT/304.8 mm: 3.40 g/.0074 lbs.
- 6. MATERIAL: BLACK POLYOLEFIN

7

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

1-603327-7 $19.1 \pm 3.05 [.75 \pm .12]$ 61 m [200 ft] MINIMUM 1-603327-1 38.1 [1.50] 603327-6 $304.8 \pm 6.35 [12.00 \pm .25]$ 603327-4 1.22 m [4 ft] MINIMUM 603327-3 603327-2 61 m [200 ft] MINIMUM 1.22 m [4 ft] MINIMUM 603327-1 MARKING NOTES LENGTH L PART NUMBER

SPECIFICATION CONTROL DRAWING

	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm.	DRAWN	UNGUYEN	03/30/2006	Tyco Electronics Corporation 300 Constitution Drive Reychem Menlo Park, CA. USA 94025	
		APPROVED	JBR00KS	03/30/2006	TITLE	
	DECIMALS .XX ± .01 [.0004 in]	cad name R060216		0216	AMPSULATION VFP21 AND FP21 3/8 INCH ID, BLACK	
	.X ± .1 [.004 in] ANGLES .X ± 0.5 DEG	THIRD ANGLE			SIZE CODE IDENT. NO. DWG. NO. 603327	
Λ	.^ _ U.J DEG	·		•	DO NOT SCALE THIS DRAWING SHEET 1 OF 1	

© 2006 TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 603327-2