




5	OBSELETE	4	3.490	.190	3.800	3.500	35	72	8-103167-3
	OBSELETE	4	3.390	.190	3.700	3.400	34	70	8-103167-2
		4	3.290	.190	3.600	3.300	33	68	8-103167-1
	OBSELETE	4	3.190	.190	3.500	3.200	32	66	8-103167-0
	OBSELETE	4	3.090	.190	3.400	3.100	31	64	7-103167-9
5	OBSELETE	4	2.990	.190	3.300	3.000	30	62	7-103167-8
		4	2.890	.190	3.200	2.900	29	60	7-103167-7
	OBSELETE	4	2.790	.190	3.100	2.800	28	58	7-103167-6
	OBSELETE	4	2.690	.190	3.000	2.700	27	56	7-103167-5
	OBSELETE	4	2.590	.190	2.900	2.600	26	54	7-103167-4
5	OBSELETE	4	2.490	.190	2.800	2.500	25	52	7-103167-3
	OBSELETE	4	2.390	.190	2.700	2.400	24	50	7-103167-2
	OBSELETE	4	2.290	.190	2.600	2.300	23	48	7-103167-1
	OBSELETE	4	2.190	.190	2.500	2.200	22	46	7-103167-0
	OBSELETE	4	2.090	.190	2.400	2.100	21	44	6-103167-9
5	OBSELETE	4	1.990	.190	2.300	2.000	20	42	6-103167-8
		4	1.890	.190	2.200	1.900	19	40	6-103167-7
	OBSELETE	4	1.790	.190	2.100	1.800	18	38	6-103167-6
	OBSELETE	4	1.690	.190	2.000	1.700	17	36	6-103167-5
	OBSELETE	4	1.590	.190	1.900	1.600	16	34	6-103167-4
5	OBSELETE	4	1.490	.190	1.800	1.500	15	32	6-103167-3
		4	1.390	.190	1.700	1.400	14	30	6-103167-2
	OBSELETE	4	1.290	.190	1.600	1.300	13	28	6-103167-1
		4	1.190	.190	1.500	1.200	12	26	6-103167-0
		4	1.090	.190	1.400	1.100	11	24	5-103167-9
5		4	.990	.190	1.300	1.000	10	22	5-103167-8
		4	.890	.190	1.200	.900	9	20	5-103167-7
		4	—	.490	1.100	.800	8	18	5-103167-6
		4	—	.390	1.000	.700	7	16	5-103167-5
		4	—	.390	.900	.600	6	14	5-103167-4
5		4	—	.290	.800	.500	5	12	5-103167-3
		4	—	.290	.700	.400	4	10	5-103167-2
	OBSELETE	4	—	.190	.600	.300	3	8	5-103167-1
	OBSELETE	3	3.490	.190	3.800	3.500	35	72	3-103167-3
	OBSELETE	3	3.390	.190	3.700	3.400	34	70	3-103167-2
5		3	3.290	.190	3.600	3.300	33	68	3-103167-1
	OBSELETE	3	3.190	.190	3.500	3.200	32	66	3-103167-0
	OBSELETE	3	3.090	.190	3.400	3.100	31	64	2-103167-9
	OBSELETE	3	2.990	.190	3.300	3.000	30	62	2-103167-8
		3	2.890	.190	3.200	2.900	29	60	2-103167-7
5	OBSELETE	3	2.790	.190	3.100	2.800	28	58	2-103167-6
	OBSELETE	3	2.690	.190	3.000	2.700	27	56	2-103167-5
	OBSELETE	3	2.590	.190	2.900	2.600	26	54	2-103167-4
	OBSELETE	3	2.490	.190	2.800	2.500	25	52	2-103167-3
		3	2.390	.190	2.700	2.400	24	50	2-103167-2
5	OBSELETE	3	2.290	.190	2.600	2.300	23	48	2-103167-1
	OBSELETE	3	2.190	.190	2.500	2.200	22	46	2-103167-0
	OBSELETE	3	2.090	.190	2.400	2.100	21	44	1-103167-9
	OBSELETE	3	1.990	.190	2.300	2.000	20	42	1-103167-8
		3	1.890	.190	2.200	1.900	19	40	1-103167-7
5	OBSELETE	3	1.790	.190	2.100	1.800	18	38	1-103167-6
	OBSELETE	3	1.690	.190	2.000	1.700	17	36	1-103167-5
		3	1.590	.190	1.900	1.600	16	34	1-103167-4
		3	1.490	.190	1.800	1.500	15	32	1-103167-3
	OBSELETE	3	1.390	.190	1.700	1.400	14	30	1-103167-2
5		3	1.290	.190	1.600	1.300	13	28	1-103167-1
		3	1.190	.190	1.500	1.200	12	26	1-103167-0
		3	1.090	.190	1.400	1.100	11	24	103167-9
		3	.990	.190	1.300	1.000	10	22	103167-8
		3	.890	.190	1.200	.900	9	20	103167-7
5	SUPERSEDED	3	—	.490	1.100	.800	8	18	103167-6
		3	—	.390	1.000	.700	7	16	103167-5
		3	—	.390	.900	.600	6	14	103167-4
		3	—	.290	.800	.500	5	12	103167-3
		3	—	.290	.700	.400	4	10	103167-2
5		3	—	.190	.600	.300	3	8	103167-1

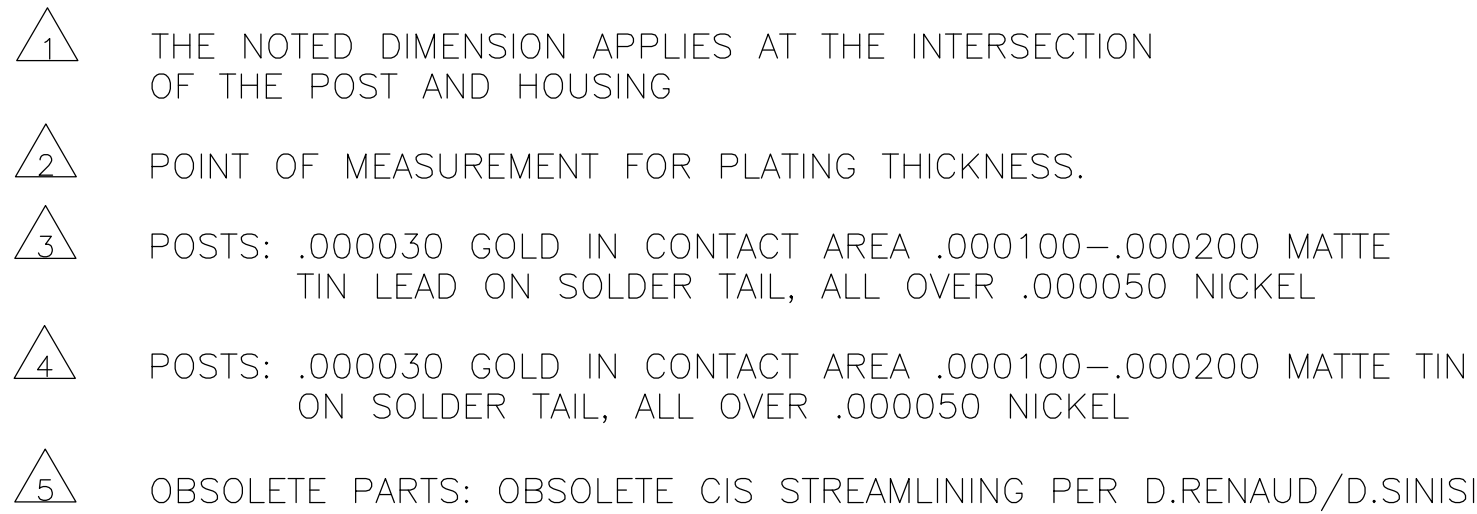

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN H MOLL	27JUL87	 TE Connectivity	
DIMENSIONS:		CHK R FEIDT	28JUL87		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R FLICKER	29JUL87	NAME	HDR ASSY, MOD II, SHROUDED, 4 SIDES, DBL ROW, .100X100 RIGHT ANGLE, W/ .025 SQ POSTS
INCHES	0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005 4 PLC ± —	PRODUCT SPEC	—	—	
	FINISH	APPLICATION SPEC	—	—	
MATERIAL	HOUSING: NAME: RETARDANT THE THERMOPLASTIC COLOR: BLACK POSTINGS: BRONZE	WEIGHT	—	—	
SEE TABLE		SIZE CAGE CODE DRAWING NO.		RESTRICTED TO	
		A1 00779 C-103167		—	
CUSTOMER DRAWING		SCALE		4:1 SHEET 1 OF 1 REV N4	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-103167-0](#)