

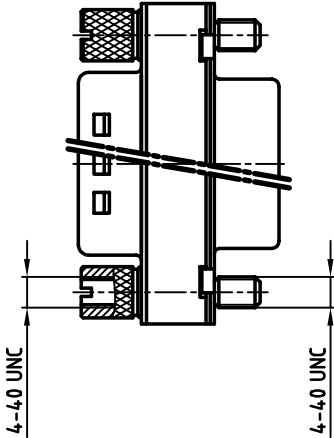


8		7		6		5		4		3		2		1	
used for: D-SUB FILTER ADAPTER															
Part -NO. POS. A ^{-0.76} B1 ^{-0.25} B2 ^{+0.25} C D ^{-0.3}															
243A10090X 9 31.19 16.46 16.79 25.00 ^{+0.12} _{-0.13} 6.12															
243A10100X 15 39.52 24.79 25.12 33.30 ^{+0.15} _{-0.1} 6.12															
243A10110X 25 53.42 38.50 38.84 47.04 ^{+0.13} 5.99															
243A10120X 37 69.70 54.96 55.30 63.50 ^{+0.13} 5.99															
F															
E															
D															
C															
B															
A															
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.															
OWNERSHIP AND COPYRIGHT OF CONEC GMBH															
DO NOT ALTER CAD DRAWING BY HAND															
CONEC CORPORATION BRAMPTON, ONTARIO				tolerance		scale: material:		2:1 SEE NOTES		title: D-SUB C-FILTER ADAPTER 9-37pos. PLUG / SOCKET					
2001				date		name		DIN 41652							
drawn				08.10.		Parel									
appl.				08.10.		E. Mickenbecker									
norm															
c-old															
rev.				description		date		name		dwg no: [AutoCAD 2000] DIN-A 3					
										part no: 24K1A176A SEE TABLE					
										sh: 1/1					
										CONEC®					
										2					
										1					
NOTES:															
1. METAL SHELLS: STEEL, min. 320µ" TIN															
2. INSULATORS: PBT GF UL 94 V-0, BLACK															
3. CONTACTS: COPPER ALLOY															
4. PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL															
5. CAPACITANCE: 830pF ±20%															
6. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS															
7. ☐ = CRITICAL DIMENSION: SPC															
F															
E															
D															
C															
B															
A															

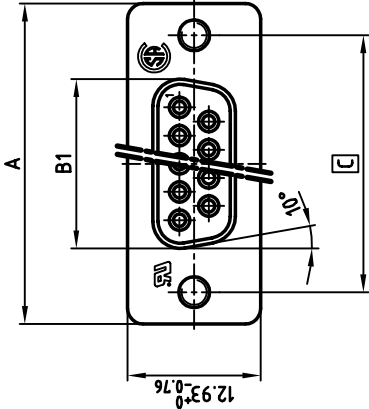

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[243A10090X](#)