

5

4





3

2

1


SPECIFICATION

Filter type	C
Performance level	PL2
Capacitance	3900pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

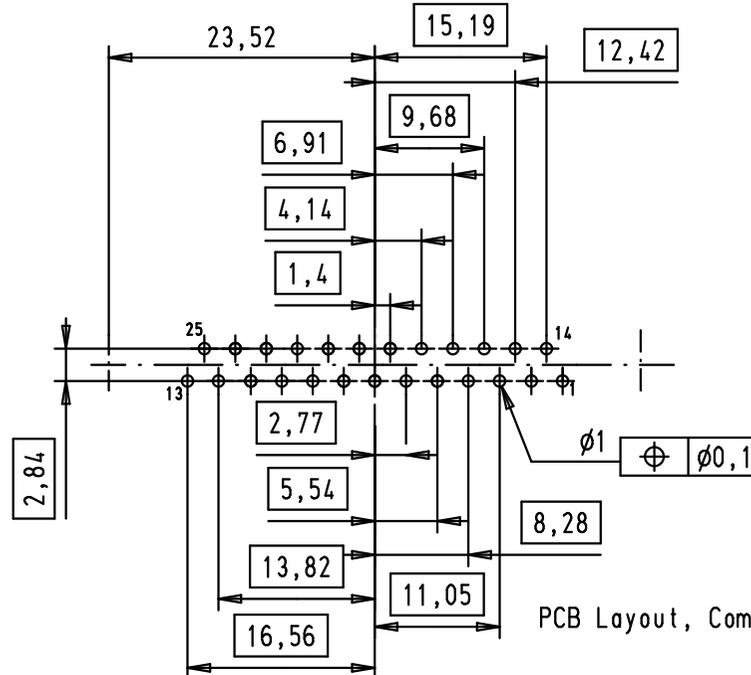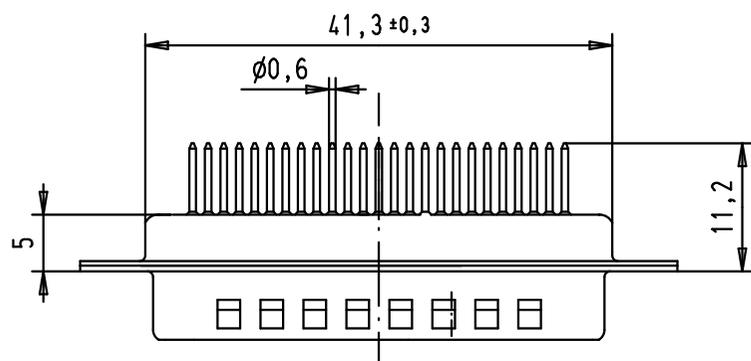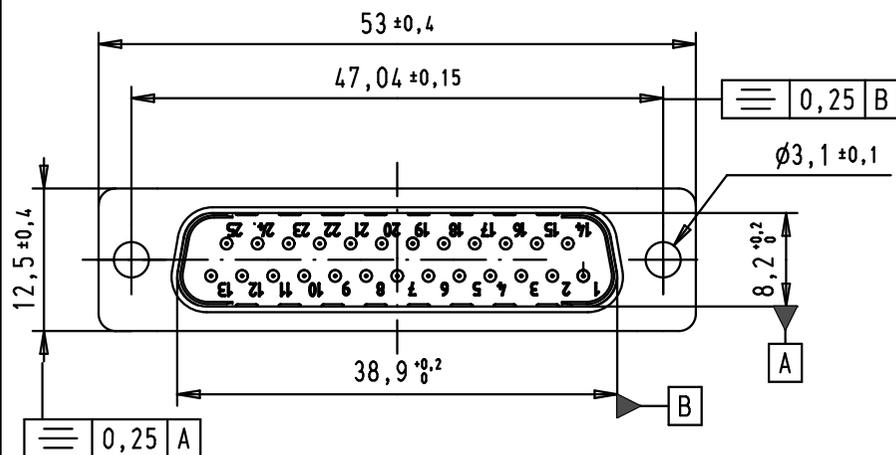

FREQUENCY (MHz)	ATTENUATION (dB)
5	6dB
10	11dB
50	25dB
100	35dB
500	35dB
1000	32dB

PCB Layout, Component side

Mod.	Dat.	Name	Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	
			Detail.	8-JUL-02		CV
			Insp.	09/12/11		JB
			Stand.			
36283	09/12/11	SD				
31589	13/01/04	AF				
31058	8-JUL-02	CV				
			HARTING EURL			
			F-95972 Paris			

D-Sub, male, straight,
25 Poles, with turned
solder pin and hole

Mo?Mstab/
Scale

1.5:1

TB 09643227240

Blatt/ Page

3 / 4

Sub.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09643227240](#)