

LVPECL

Voltage Controlled Crystal Oscillator

CVPD-037X Model 5x7 mm SMD, 3.3V, LVPECL

Frequency Range: 40.000 to 170.000 MHz
Operating Temperature Range: -40°C to 85°C
Storage Temperature Range: -45°C to 90°C
Input Voltage: 3.3V ± 5%
Control Voltage: 1.65V ± 1.5V
Input Current: 56mA Max
Standby Current: 800uA
Output: PECL
 Symmetry: 45/55% Max @ zero crossing point
 Rise/Fall Time: 0.25nSec Typical, 0.5ns Max, (20% to 80%)
 Pullability APR: ±50ppm Min APR
 Load: 50 ohms (Vdd-2.0V)
 Logic "1" Level: 2.275 VDC Min
 Logic "0" Level: 1.680 VDC Max
 Modulation BW: 15 kHz Min

Input Impedance: 5 Mohm Min
Enable Delay Time: 2 ms Max
Disable Delay Time: 200 ns Max

Phase Noise (Typical for 160 MHz):
 10 Hz Offset: -60 dBc/Hz
 100 Hz Offset: -90 dBc/Hz
 1 kHz Offset: -118 dBc/Hz
 10 kHz Offset: -134 dBc/Hz
 100 kHz Offset: -144 dBc/Hz
 1 MHz Offset: -150 dBc/Hz
 10 MHz Offset: -157 dBc/Hz
 40 MHz Offset: -157 dBc/Hz





Standard Frequencies (MHz)
100.000
122.880
153.600
156.250


Mechanical:	
Shock:	MIL-STD-883, Method 2002, Condition B
Solderability:	MIL-STD-883, Method 2003
Vibration:	MIL-STD-883, Method 2007, Condition A
Solvent Resistance:	MIL-STD-202, Method 215
Resistance to Soldering Heat:	MIL-STD-202, Method 210, Condition I or J
Environmental:	
Thermal Shock:	MIL-STD-883, Method 1011, Condition A
Moisture Resistance:	MIL-STD-883, Method 1004

Part Number Example: CVPD-037X-100.000 = 3.3V, ±50ppmAPR, 100 MHz

Dimensions inches (mm)
 All dimensions are Max unless otherwise specified.

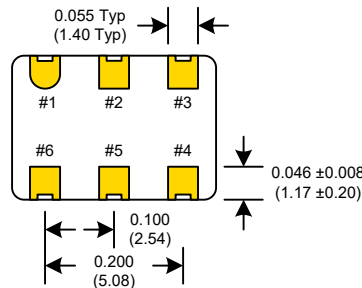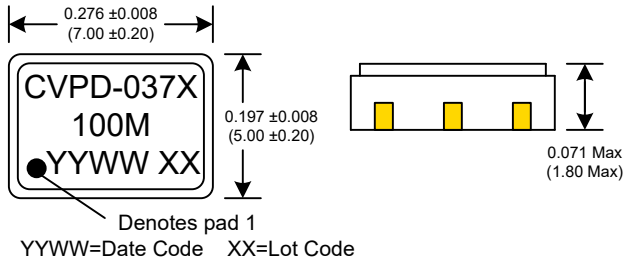


SUGGESTED PAD LAYOUT

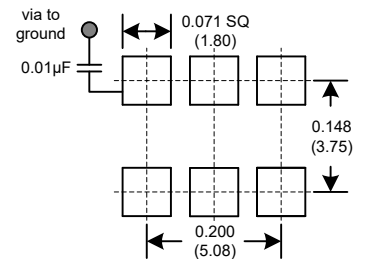

0.01µF Bypass Capacitor Recommended

RECOMMENDED REFLOW SOLDERING PROFILE

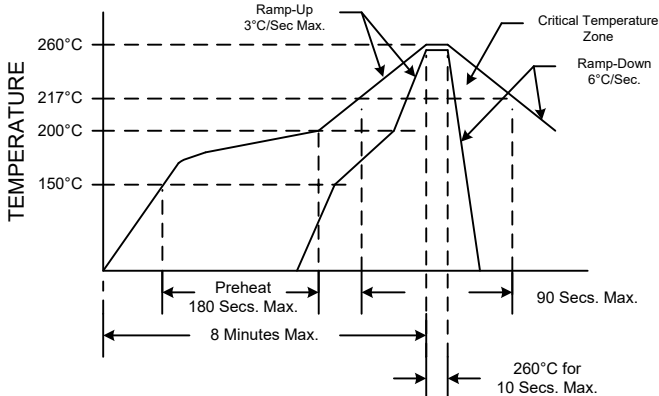

NOTE: Reflow Profile with 240°C peak also acceptable.

PIN	Connection
1	Cont. Volt
2	E/D
3	GND
4	Output
5	Comp Output
6	Vcc

Enable/Disable	
Function pin 2	Output pin
Open or N/C	Active
"1" level 0.7×Vdd Min	Active
"0" level 0.3×Vdd Max	High Z

Available on 16mm Tape and Reel in quantities of 1,000 pcs.

Rev: F
 Date: 19-Jan-2017
 Page 1 of 1

Specifications subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Crystek:](#)

[CVPD-037X-100](#) [CVPD-037X-122.88](#) [CVPD-037X-153.6](#) [CVPD-037X-156.250](#)