

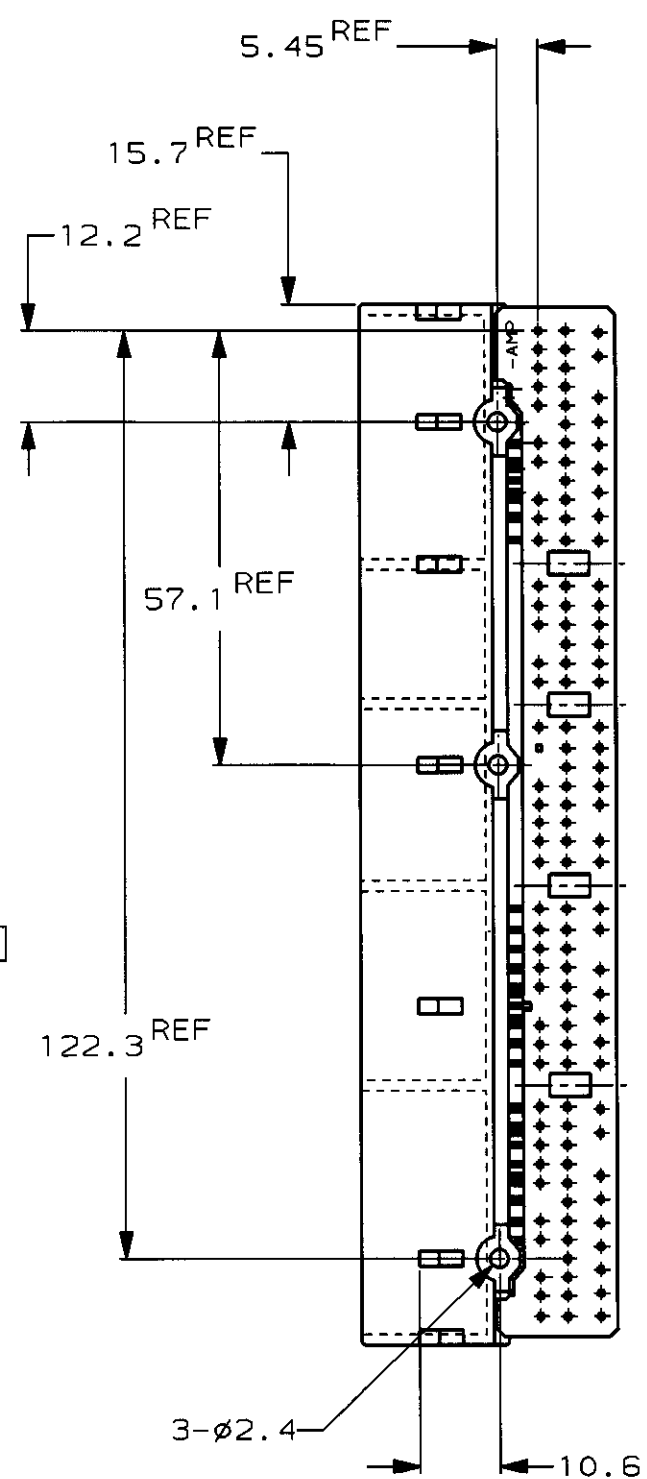




- ① MEASURED AT THE SECTION 7.5mm FROM Z.
- ② POWER CIRCUITS (29) ; SEE FIG 1
- ③ CIRCUIT NUMBERS ; SEE FIG 1
4. PART NO OF PLUG HOUSINGS TO BE MATED
24P; 353029,31P; 1318682 ,353826
5. RECOMMENDED SCREW: PAN-HEADED, TYPE 2
TAPPING SCREW OF 3DIA X 6LEN(MAX)
(JIS B1115, B1122).
6. FASTENING TORQUE FOR SCREW: 0.392N・m MAX.
7. INSTRUCTION SHEET 411-5931

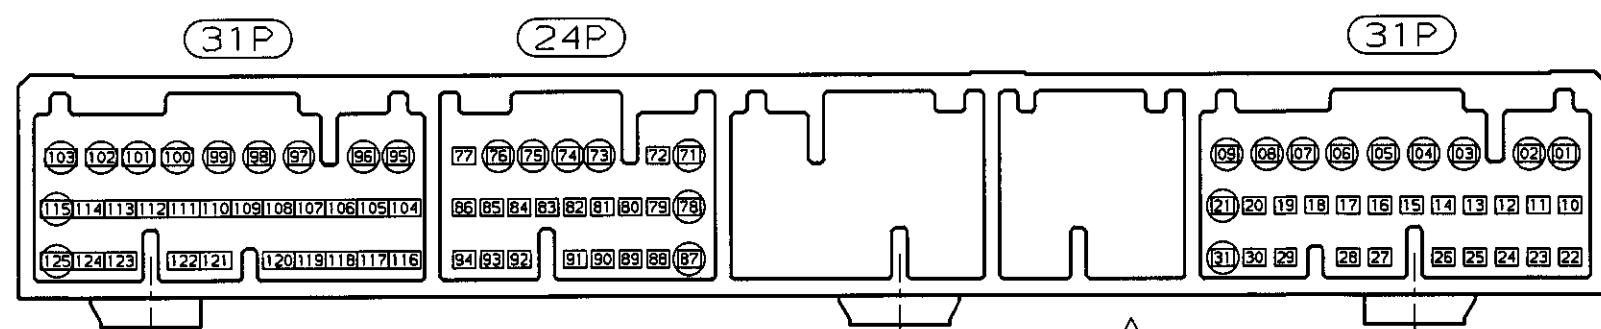

△(NO); パワ-回路用
(FOR POWER CIRCUIT)

NATURAL	PBT	TINE PLATE	1	⑤
PRE-TIN	COPPER ALLOY	TAB CONTACT (L)	25	④
PRE-TIN	COPPER ALLOY	TAB CONTACT (M)	33	③
PRE-TIN	COPPER ALLOY	TAB CONTACT (S)	28	②
NATURAL	PBT	CAP HOUSING	1	①
FINISH/COLOR	MATERIAL	NAME	QTY	ITEM NO

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AND INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ORGANIZATION ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN Y.FUJIIWALA 29SEP99 CHK K.ODA 30SEP99 APVD K.ODA 30SEP99		AMP 日本エー・エム・ピー株式会社 Kawasaki, Japan	
DIMENSIONS: 単位 ㎜		TOLERANCES UNLESS OTHERWISE SPECIFIED		NAME 名称 040 III HIGH DENSITY CONNECTOR 86P0S CAP HOUSING ASSY	
		一般公差 10mm ±0.2 30mm ±0.25 100mm ±0.3 ANGLE ±3°		PRODUCT SPEC 製品規格 108-5673 APPLICATION SPEC 取付適用規格	
MATERIAL 材料 SEE TABLE		FINISH 仕上 SEE TABLE		SIZE CAGE CODE DRAWING NO A2 00779 C-1318614 図号	
		WEIGHT 36.5g		RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 1-1 SHEET 1 OF 1 REV 0	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1318614-1](#)