
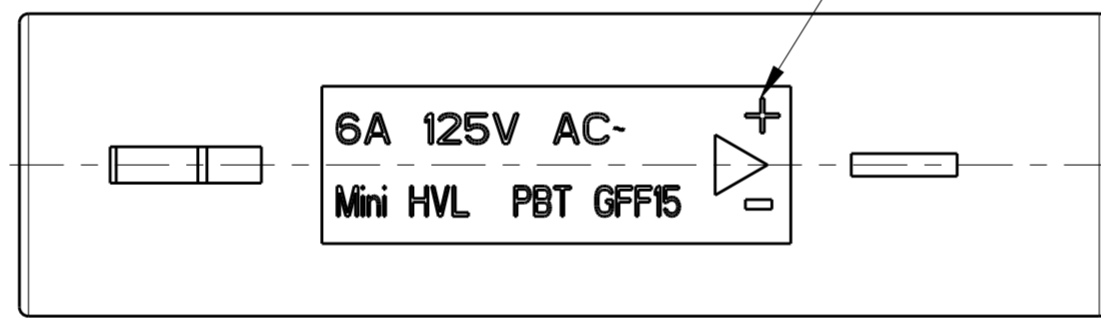
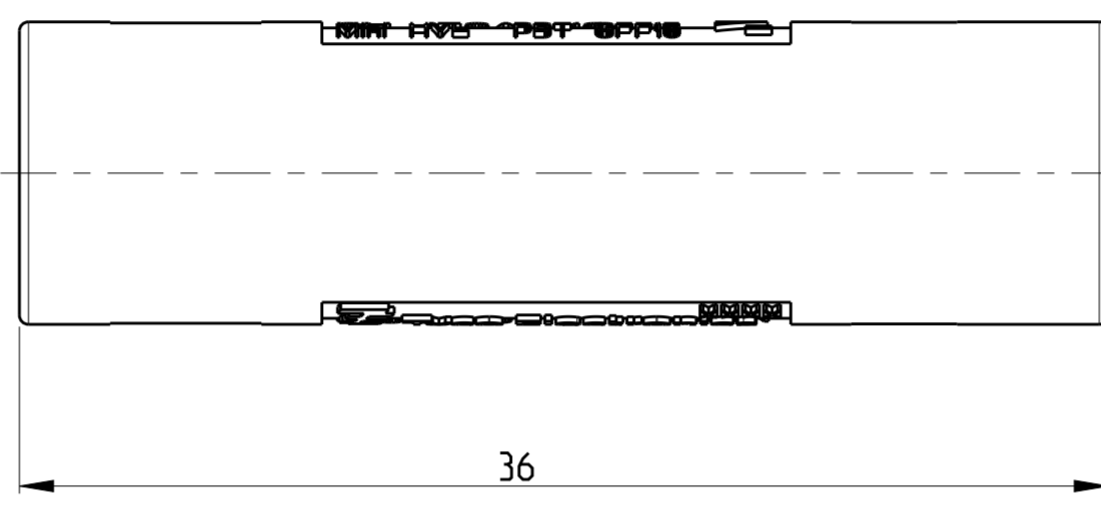
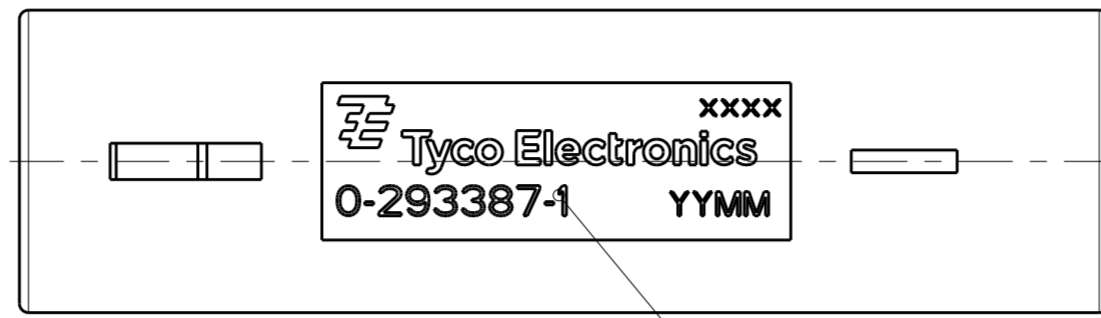



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
		B1		REVISED PER ECR-13-003447	11MAR2013	RS	DD
		E		REVISED PER ECR-16-005692	02JUN2016	RS	JL
		F		REVISED PER ECR-16-017348	24FEB2017	RK	JL

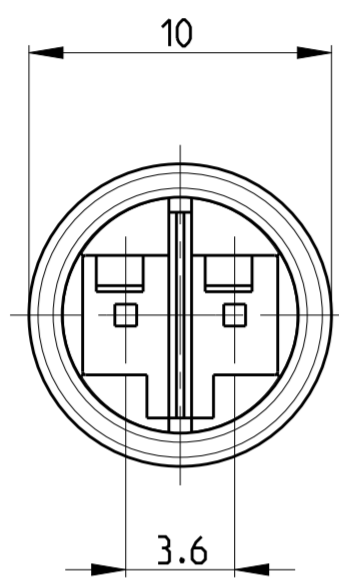

- Remarks:
1. cavities designed for MQS pin contact PN 1740335-x
  2. Counterpart is Plug PN 293388-x
- 3 Polarity marking +/- permanent / usable for DC version
  - 4 PN specific marking
  - 5 PBT 15GF, UL 94 V0 WHITE COLOR

P/N 293387-1 AS SHOWN

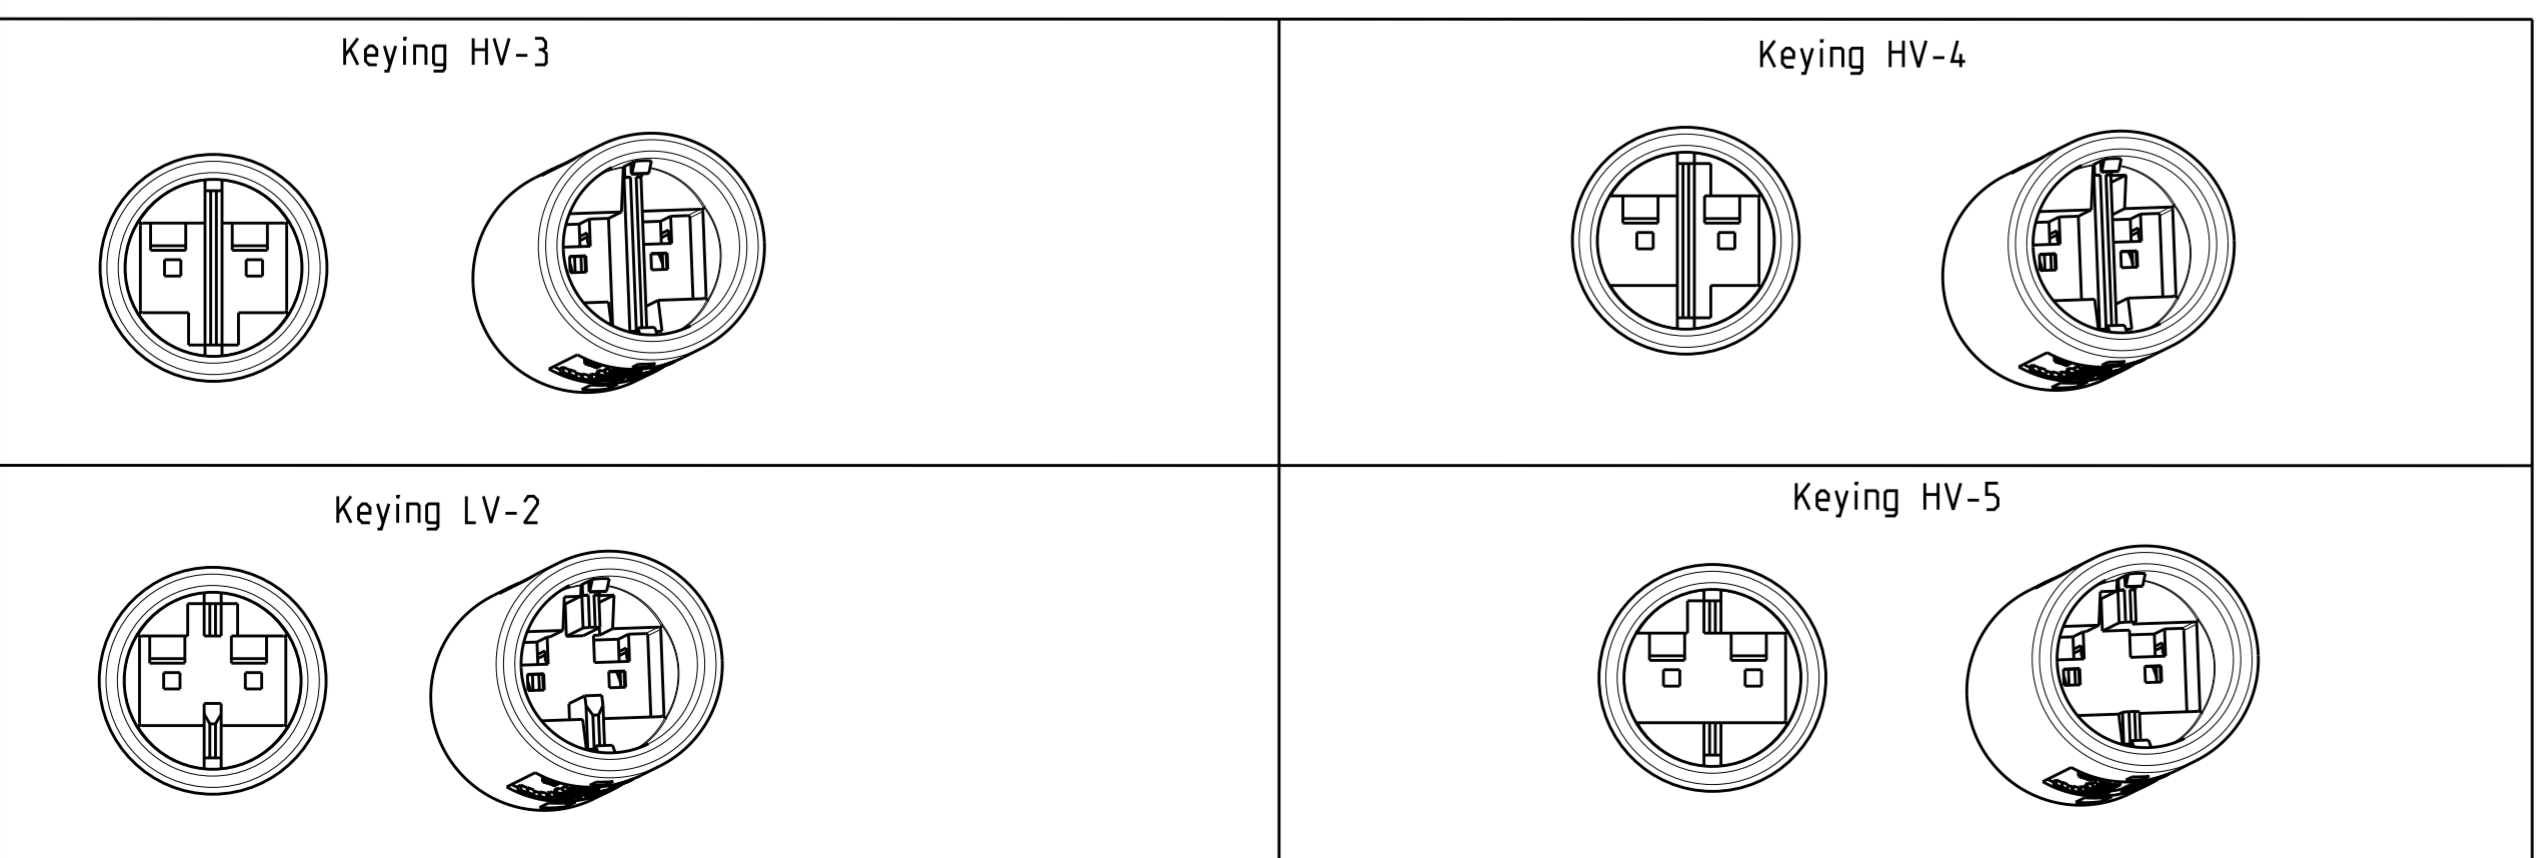

Note	Keying	COLOR/MATERIAL	REMARKS	Marking	PN
	LV-2	WHITE 5	LOW-VOLTAGE 125VAC/VDC	7A/125VAC/VDC =	293387-4
	HV-5	WHITE 5	HIGH-VOLTAGE 125V AC	6A/125V AC ~	293387-3
	HV-4	WHITE 5	HIGH-VOLTAGE 125V AC	6A/125V AC ~	293387-2
	HV-3	WHITE 5	HIGH-VOLTAGE 125V AC	6A/125V AC ~	293387-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±0.2
2 PLC	±0.13
3 PLC	±0.013
4 PLC	±0.0001
ANGLES	±
FINISH	

MATERIAL 5

APVD: G. Turco 12FEB2009

CHK: G. Turco 12FEB2009

DWN: A. Vecchia 12FEB2009

PRODUCT SPEC: -

APPLICATION SPEC: -

WEIGHT: 2.2g

CUSTOMER DRAWING

SCALE: 3:1

SHEET 1 OF 1

REV F

STE TE Connectivity

NAME: NECTOR S Lighting System Outlet

SIZE: A2

CAGE CODE: 00779

DRAWING NO: C-293387

RESTRICTED TO: -

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[293387-1](#)