
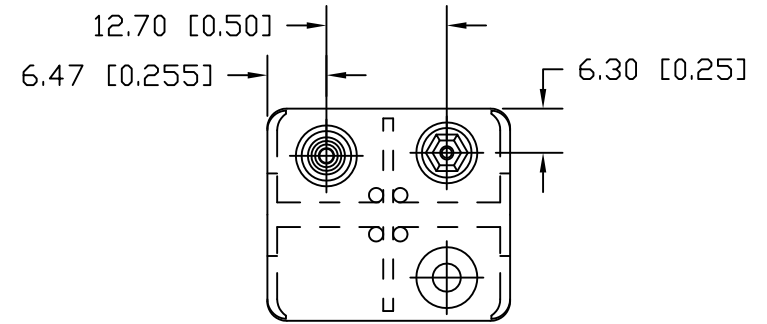
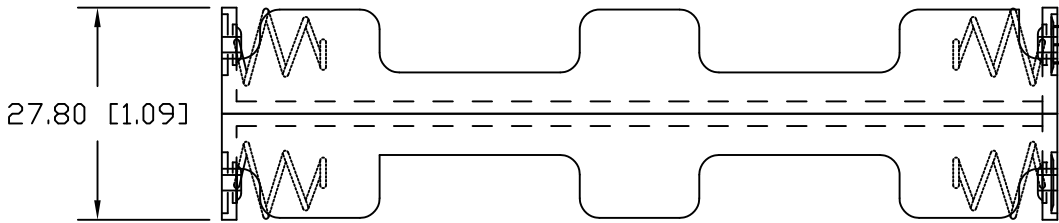



| Date    | SYM | REVISION RECORD  | AUTH | DR.  | CK. |
|---------|-----|--|------|------|-----|
| 4/19/13 | A   | UPDATED TO ROHS 2 COMPLIANT  | T.B. | B.S. |     |
| 6/14/13 | B   | UPDATED TITLE  | T.B. | B.S. |     |
| 7/14/16 | C   | DIM. 107.60 WAS 107.50<br>DIM. 27.50 WAS 27.80                                   | T.B. | B.S. |     |
| 6/16/17 | D   | UPDATED MATERIAL SPECIFICATION<br>DIM. 107.50 WAS 107.60<br>DIM. 27.80 WAS 27.50 | T.B. | B.S. |     |

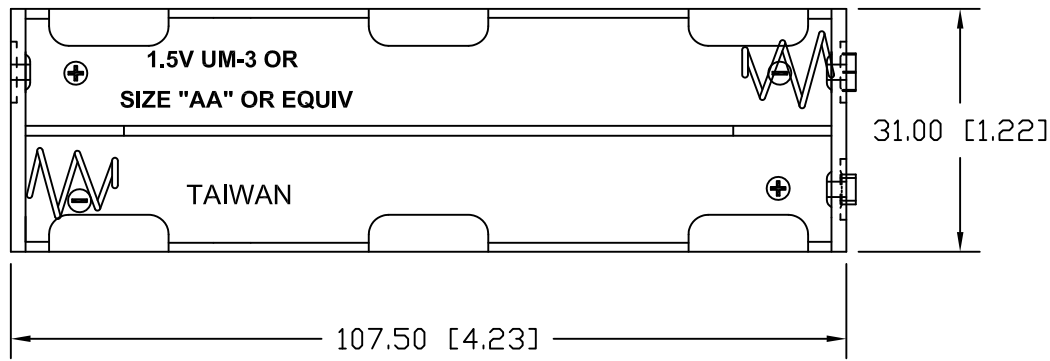

**MATERIAL:**

HOUSING: POLYPROPYLENE  
 FLAMMABILITY RATING -UL94 HB, UL FILE NO. E216959  
 TEMPERATURE RANGE: -10°C to +100°C  
 SPRINGS: SPRING STEEL, NICKEL PLATED  
 RIVETS: BRASS, NICKEL PLATED  
 9V SNAPS: BRASS, NICKEL PLATED  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS  
 PER EIA-540J000

ROHS 2 COMPLIANT

|                          |   |                            |  |
|--------------------------|---|----------------------------|--|
| Tolerance<br>(Inches)    |  <b>Memory Protection Devices, Inc</b><br>200 Broad Hollow Road, Farmingdale, New York 11735 |                            |  |
| Decimal<br>±.5 (.020)    | Scale   | Drawn By B.S.              |  |
| Fractional<br>±.8 (.030) | Title<br>EIGHT "AA" BATTERY HOLDER WITH SNAP FASTENERS  |                            |  |
| Angular<br>± 3°          | Date<br>6/16/17   | Drawing Number<br>BH28AASF |  |
|                          |   | Approved By T.B.           |  |