


DESIGNED FOR USE WITH RD316 CABLES	
CABLE ENTRY DIAMETER MINIMUM	
FERRULE	.137
HOUSING	.062
CONTACT	.041

LOC	DIST	REVISIONS					
AJ	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B1	REVISED PER ECO-09-026299	25Nov2009	AM	BOB

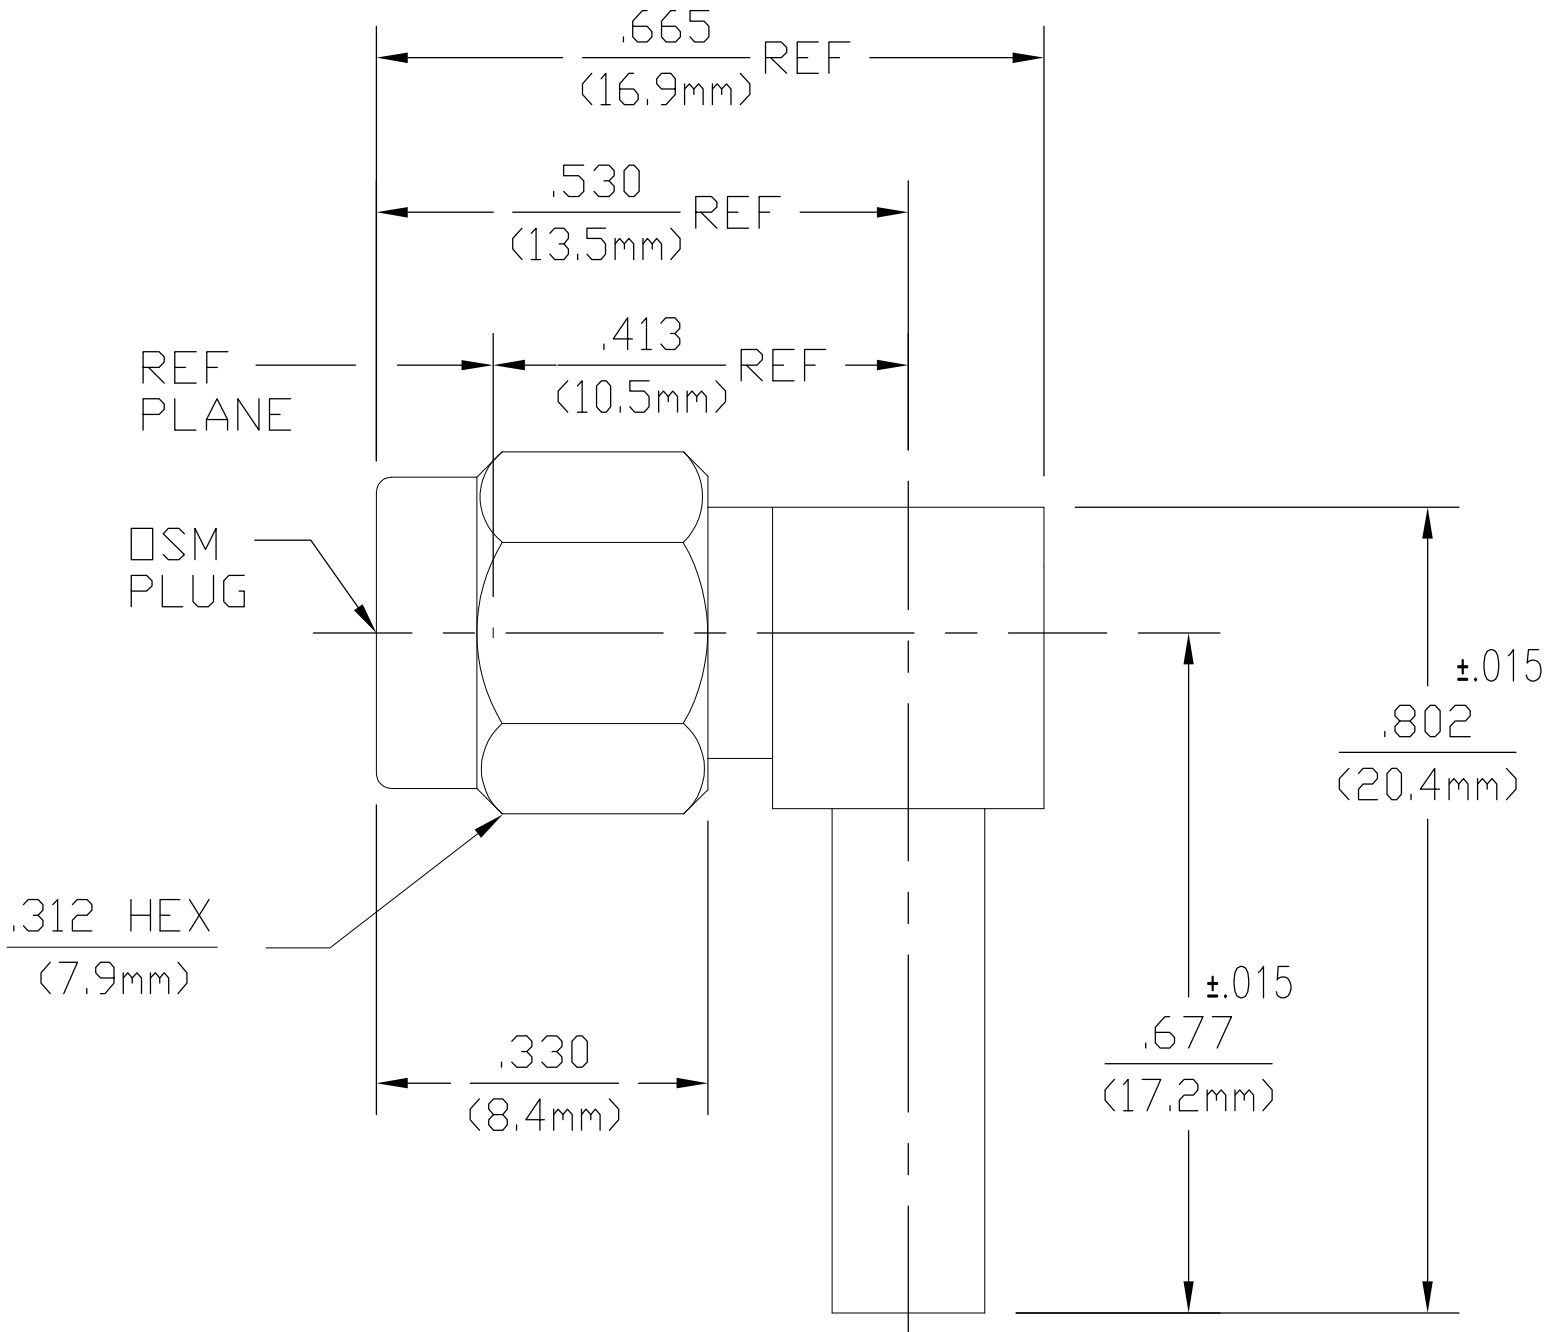

- 1 BRASS
- 2 STAINLESS STEEL
- 3 BERYLLIUM COPPER
- 4 PTFE
- 5 SILICONE RUBBER
- 6 GOLD PLATE
- 7 NICKEL PLATE
- 8 PASSIVATE

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A, Fig. 310.1	TEMPERATURE RATING -65°C TO +165°C
Frequency Range (GHz) DC to 12.4	Recommended Mating Torque 7-10 In-Lbs	DURABILITY:500 CYCLES
Volt Rating (VRMS MAX) @ Sea Level 250	Mating Characteristics:	
VSWR 1.18+.02f(GHz)	Insertion (MAX Lbs) N/A	
Insertion Loss (dB MAX) .07 √f(GHz)	Withdrawal (MIN Oz) N/A	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 750	Force to Engage and Disengage (In-Lbs MAX) 2.0	
Contact Resistance (Milliohms MAX)	Center Contact Captivation	
Center Contact 3.0	Axial (Lbs) 6.0	
Outer Contact 2.0	Radial (In-Oz) N/A	
Cable to Housing 0.5	Cable Retention	
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 500	Axial Force (Lbs) 20 Min	
I.R.(Megohms MIN) 5,000	Torque (In-Oz) N/A	
	Weight (Grams) TBD	

1 7	1 7	1 7	4	1 6	1 7	3	5	1056456-3
2 8	2 8	2 8	4	1 6	1 7	3	5	1056456-1
CAP	HOUSING	COUPLING NUT	DIELEC-TRIC	CENTER CONTACT	FERRULE	RETAINING RING	GASKET	TE PN.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BB 2/1/93	Tyco Electronics Corporation Kunshan,Jiangsu, RPC 215312					
DIMENSIONS: INCHES		CHK -						
		APVD DC 2/3/93	NAME					
		TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-112002					
MATERIAL -		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -	APPLICATION SPEC 408-4659		SIZE A2		CAGE CODE 00779	DRAWING NO C=1056456
			WEIGHT -		RESTRICTED TO -			
			CUSTOMER DRAWING		SCALE 4:1	SHEET 1 of 1	REV B1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2837-7316-02](#)