


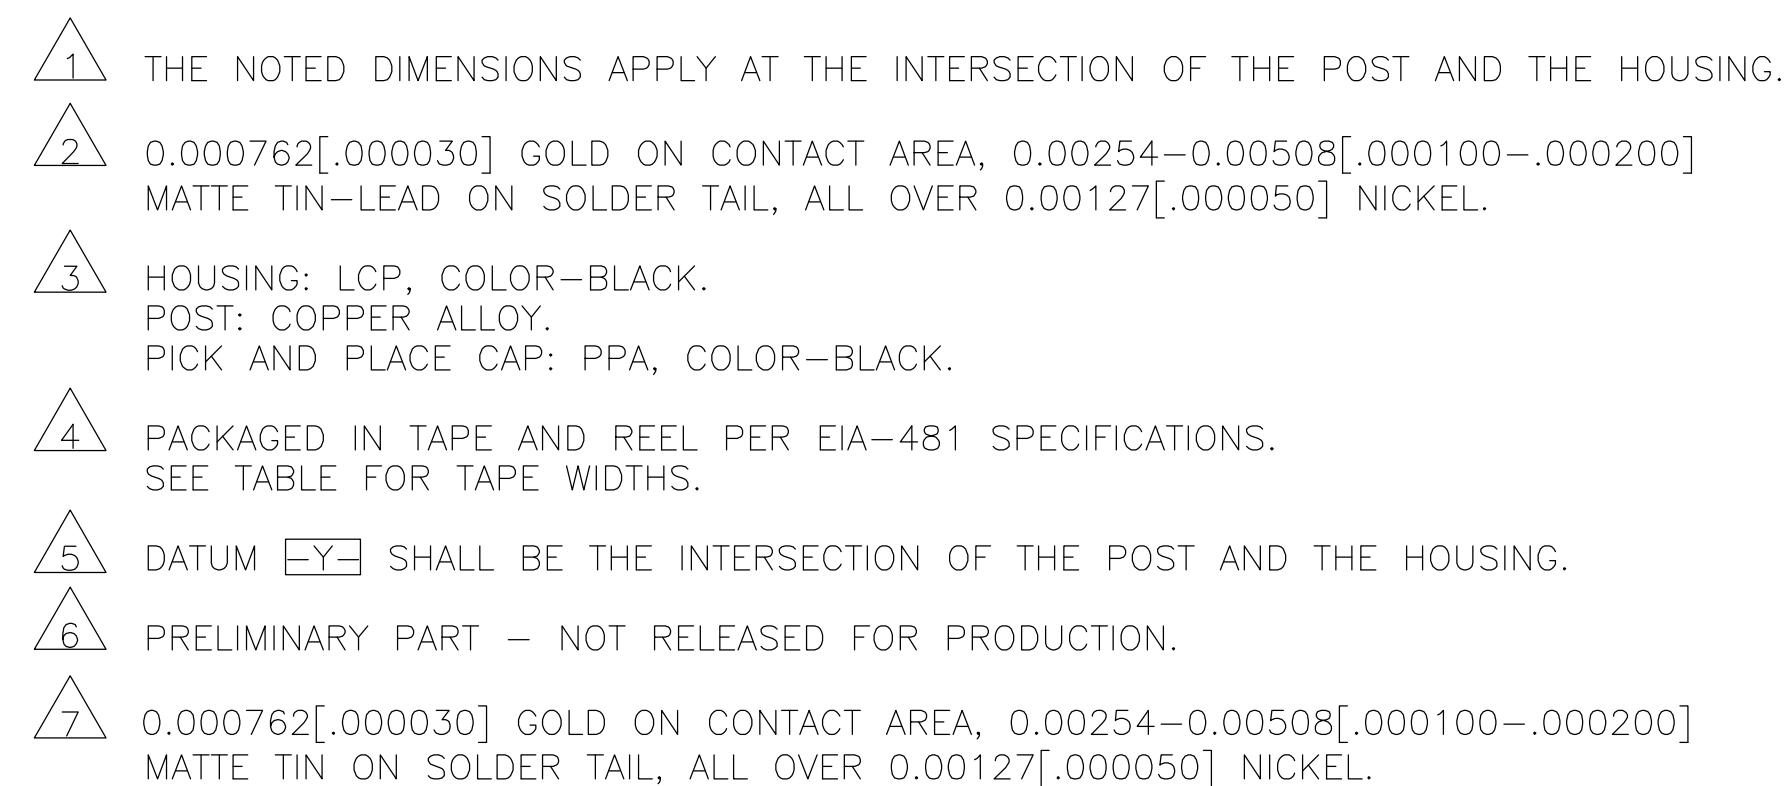

6	7	56 mm	35.56 [1.400]	14	37.69 [1.484]	15	6-147118-3	
	7	56 mm	33.02 [1.300]	13	35.15 [1.384]	14	6-147118-2	
	7	56 mm	30.48 [1.200]	12	32.61 [1.284]	13	6-147118-1	
	7	56 mm	27.94 [1.100]	11	30.07 [1.184]	12	6-147118-0	
	7	56 mm	25.4 [1.000]	10	27.53 [1.084]	11	5-147118-9	
	7	56 mm	22.86 [.900]	9	24.99 [.984]	10	5-147118-8	
	7	44 mm	20.32 [.800]	8	22.45 [.884]	9	5-147118-7	
	7	44 mm	15.24 [.600]	6	17.37 [.684]	7	5-147118-6	
	7	32 mm	12.70 [.500]	5	14.83 [.584]	6	5-147118-5	
	7	32 mm	10.16 [.400]	4	12.29 [.484]	5	5-147118-4	
	7	24 mm	7.62[.300]	3	9.75[.384]	4	5-147118-3	
	7	44 mm	17.78[.700]	7	19.91[.784]	8	5-147118-2	
	7	24 mm	5.08[.200]	2	7.21[.284]	3	5-147118-1	
	OBSOLETE		32 mm	10.16[.400]	4	12.29[.484]	5	147118-5
	6	2	32 mm	12.70[.500]	5	14.83[.584]	6	147118-4
2		24 mm	7.62[.300]	3	9.75[.384]	4	147118-3	
2		44 mm	17.78[.700]	7	19.91[.784]	8	147118-2	
2		24 mm	5.08[.200]	2	7.21[.284]	3	147118-1	
PLATING		TAPE WIDTH	C	B	A	NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HAYMAKER CHK J. GESFORD APVD J. GESFORD PRODUCT SPEC — APPLICATION SPEC —		 TE Connectivity	
DIMENSIONS: mm [INCHES]		23JAN02 02DEC98 02DEC98			
 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13[.005] 4 PLC ± - ANGLES ± -		NAME S/M HEADER ASSEMBLY, MOD II, B/W, VERTICAL, SINGLE ROW, .100 C/L, .025 SQ POST, WITH PICK AND PLACE CAP		RESTRICTED TO —	
MATERIAL 		WEIGHT 0		CAGE CODE —	
FINISH SEE TABLE		DRAWING NO G-147118		REV G9	
		CUSTOMER DRAWING		SCALE 5:1	
				SHEET 1 of 1	

RECOMMENDED PCB LAYOUT
FOR USE WITH 0.20[.008] THICK STENCIL

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-147118-3](#)