

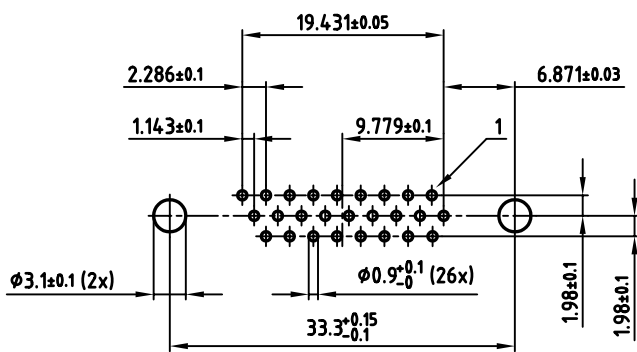

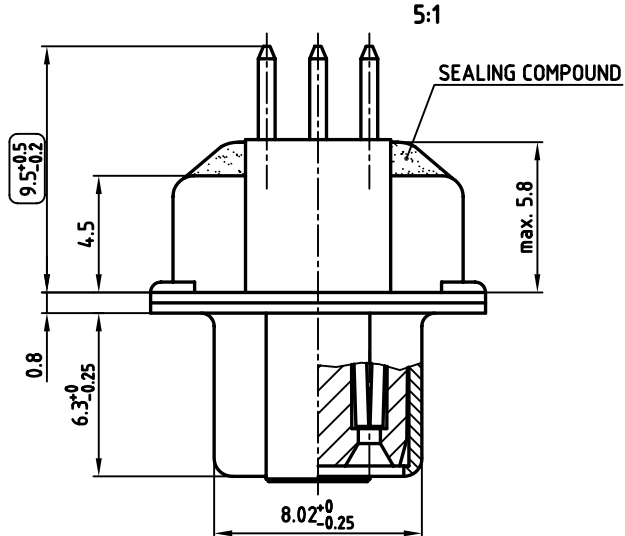


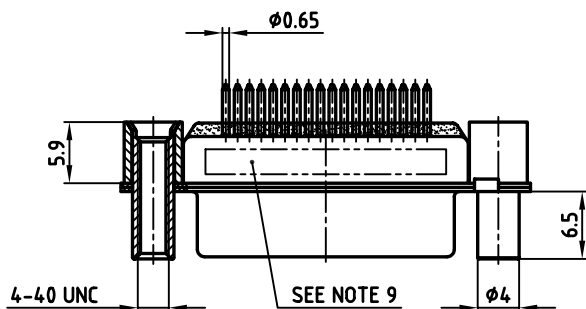

P.C.B. HOLE DRILLINGS

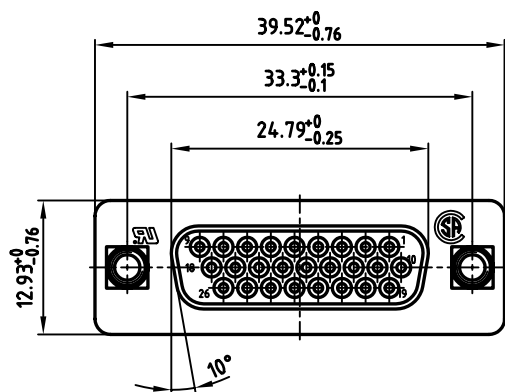

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
- THREADED REAR SPACER / FRONT THREADED LOCK:
COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
- SLEEVE: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
- CAPACITANCE: 830pF ±20%
- DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: 242A18430X CONEC ABC
- = CHECK DIMENSION

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACIOM	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACIOM	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance	scale:	material:
	2:1 (5:1)	SEE NOTES
2005	date	name
drawn	02.02.	Lehmenkühler
appd.	02.02.	Mickenbecker
norm		
d-old		

title:	
D-SUB HD FILTER FEMALE	
26pos. SOLDER PIN STRAIGHT	
threaded rear spacer and front threaded lock	
dwg no:	AutoCAD 2004
part no:	24K1A599
part no:	242A18430X



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[242A18430X](#)