




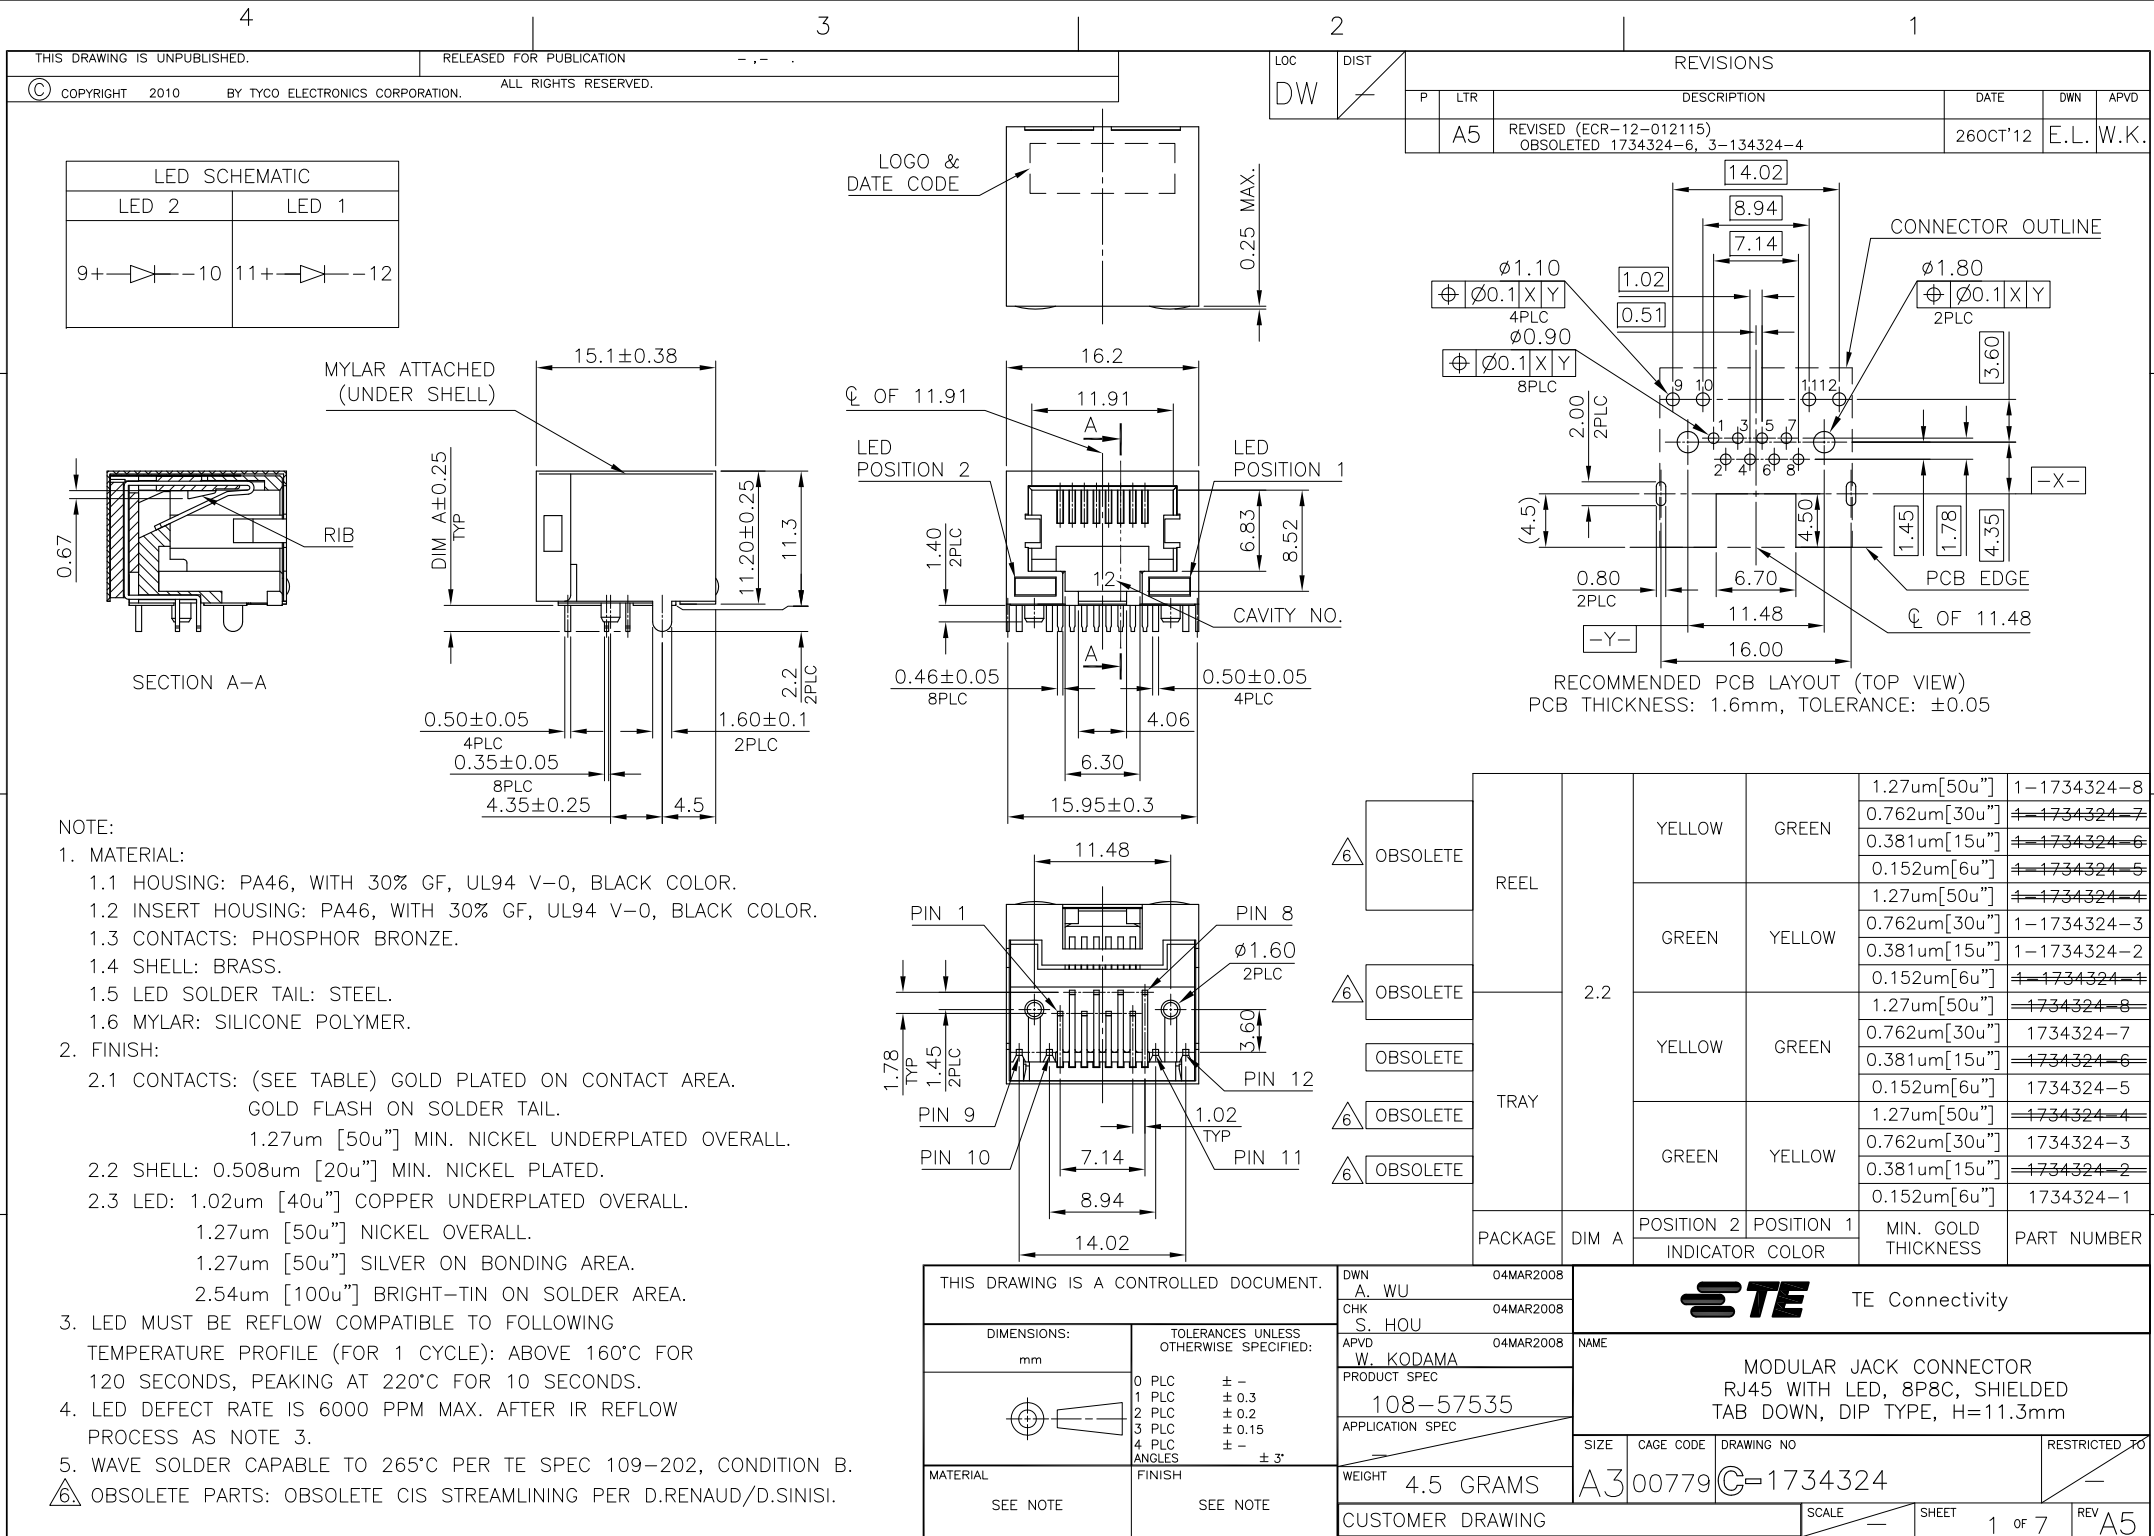

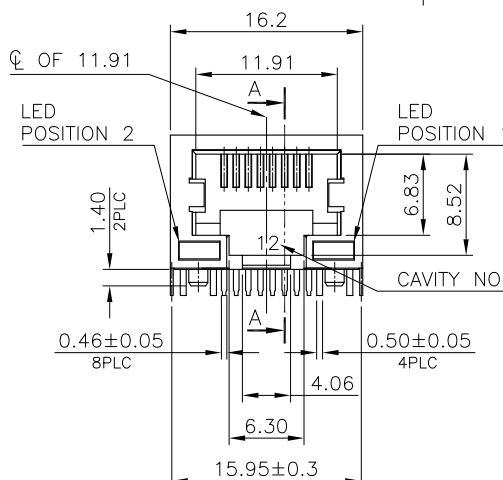



6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

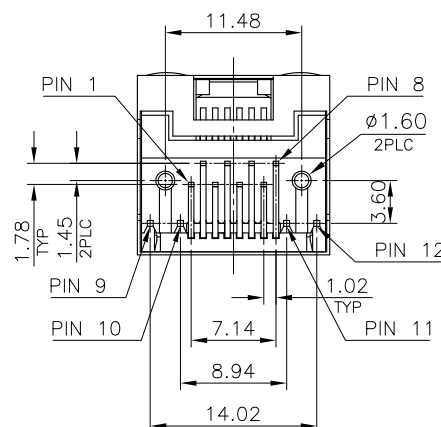


△6	OBSOLETE	W/O	TAPE & REEL	YELLOW	GREEN	1.27um[50u"]	3-1734324		
						0.762um[30u"]	3-1734324		
						0.381um[15u"]	3-1734324		
						0.152um[6u"]	3-1734324		
	OBSOLETE			GREEN	YELLOW	1.27um[50u"]	3-1734324		
			0.762um[30u"]			3-1734324			
			0.381um[15u"]			3-1734324			
			0.152um[6u"]			3-1734324			
△6	OBSOLETE	W/	TRAY	YELLOW	GREEN	1.27um[50u"]	2-1734324		
						0.762um[30u"]	2-1734324		
						0.381um[15u"]	2-1734324		
						0.152um[6u"]	2-1734324		
						GREEN	YELLOW	1.27um[50u"]	2-1734324
								0.762um[30u"]	2-1734324
								0.381um[15u"]	2-1734324
								0.152um[6u"]	2-1734324
	RIB	PACKAGE	POSITION 2 INDICATOR	POSITION 1 COLOR	MIN. GOLD THICKNESS	PART NUMBER			

DWN	—	 TE Connectivity			
CHK	—				
APVD	—				
PRODUCT SPEC	—				
APPLICATION SPEC	—				
WEIGHT	—	NAME MODULAR JACK CONNECTOR RJ45 WITH LED, 8P8C, SHIELDED TAB DOWN, DIP TYPE, H=11.3mm			
SIZE A3		CAGE CODE 00779	DRAWING NO C=1734324	RESTRICTED —	
CUSTOMER DRAWING			SCALE —	SHEET 2 OF 7	REV A5

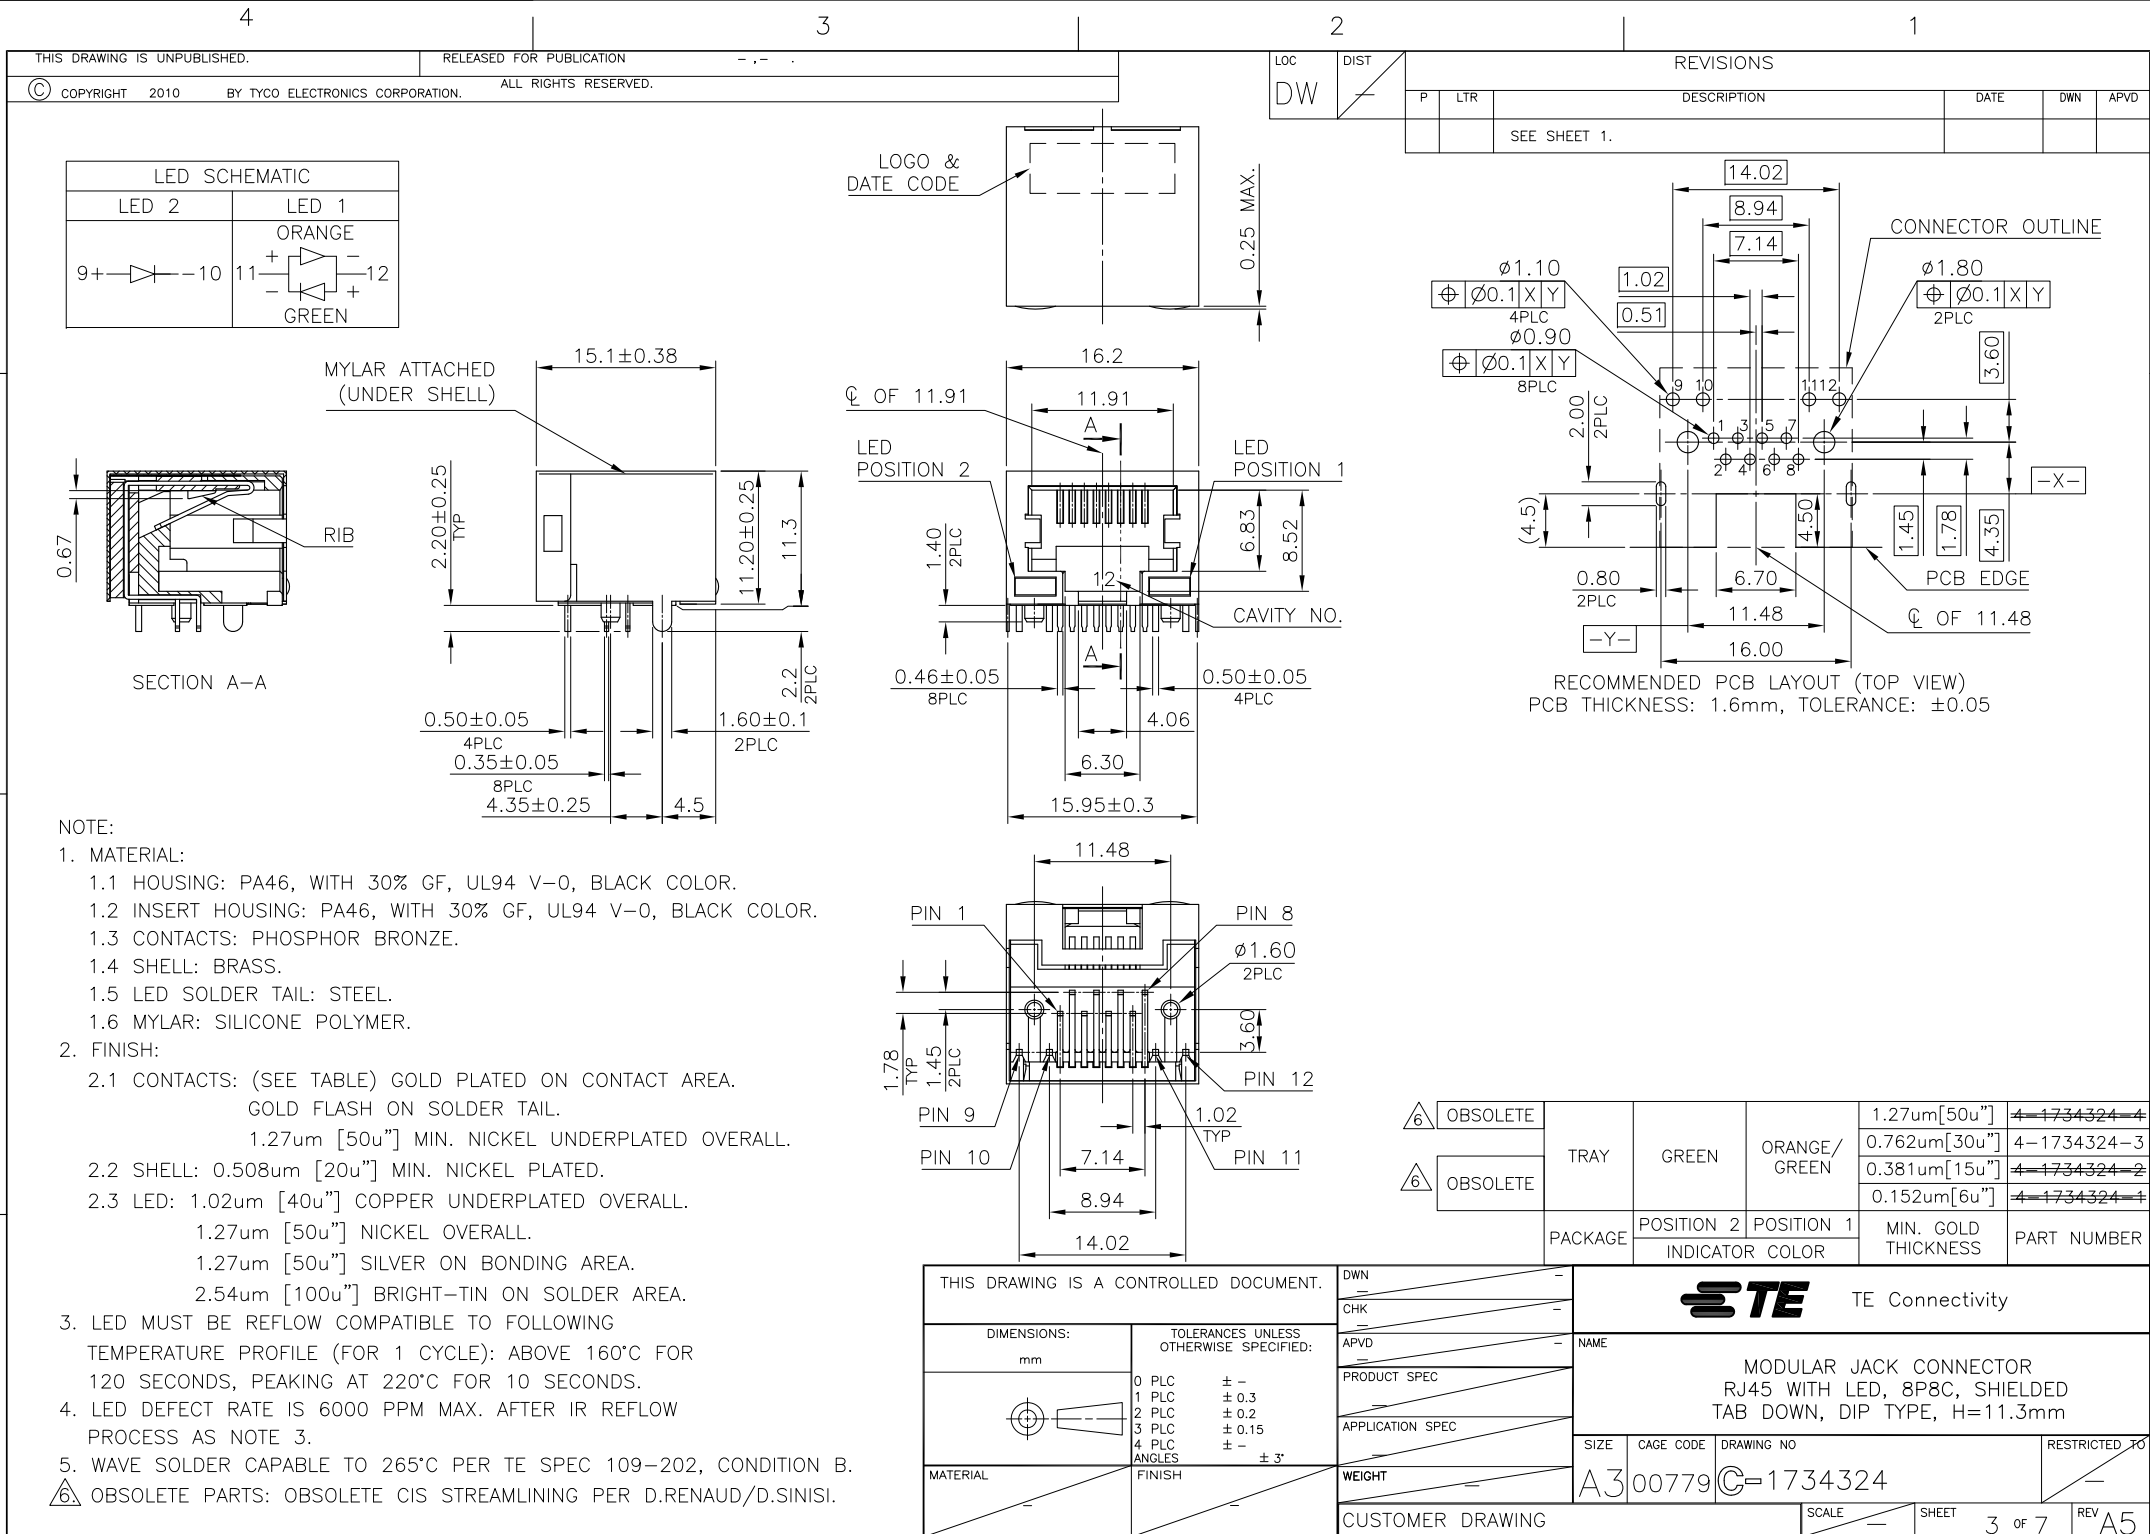

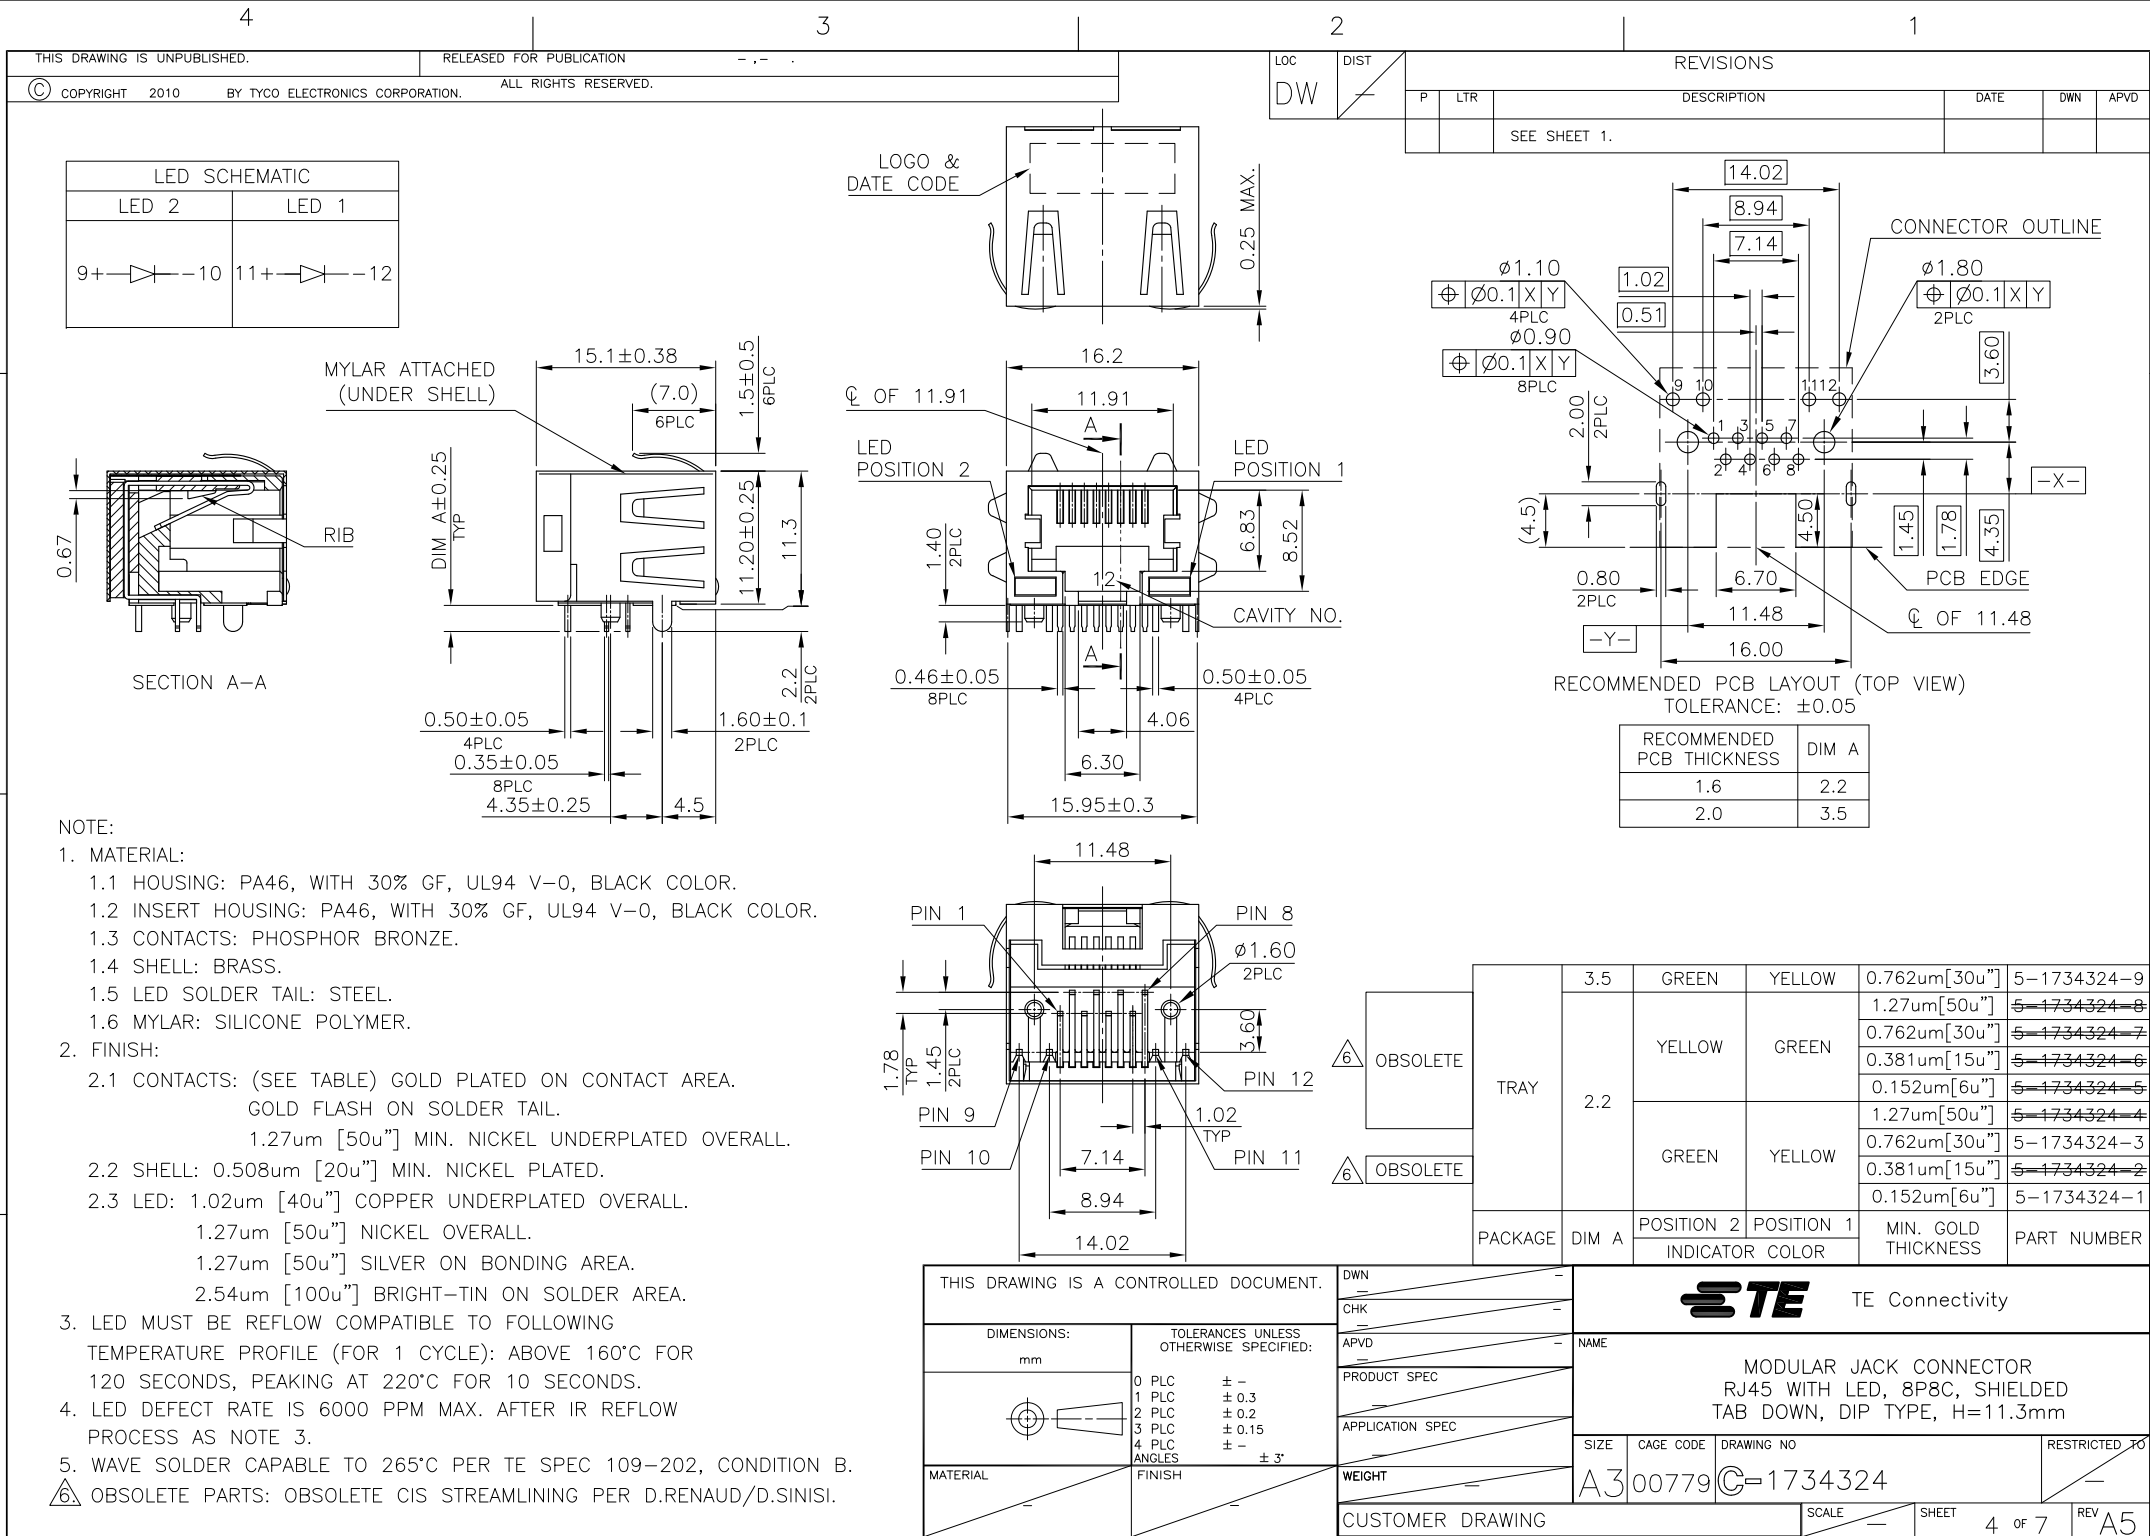

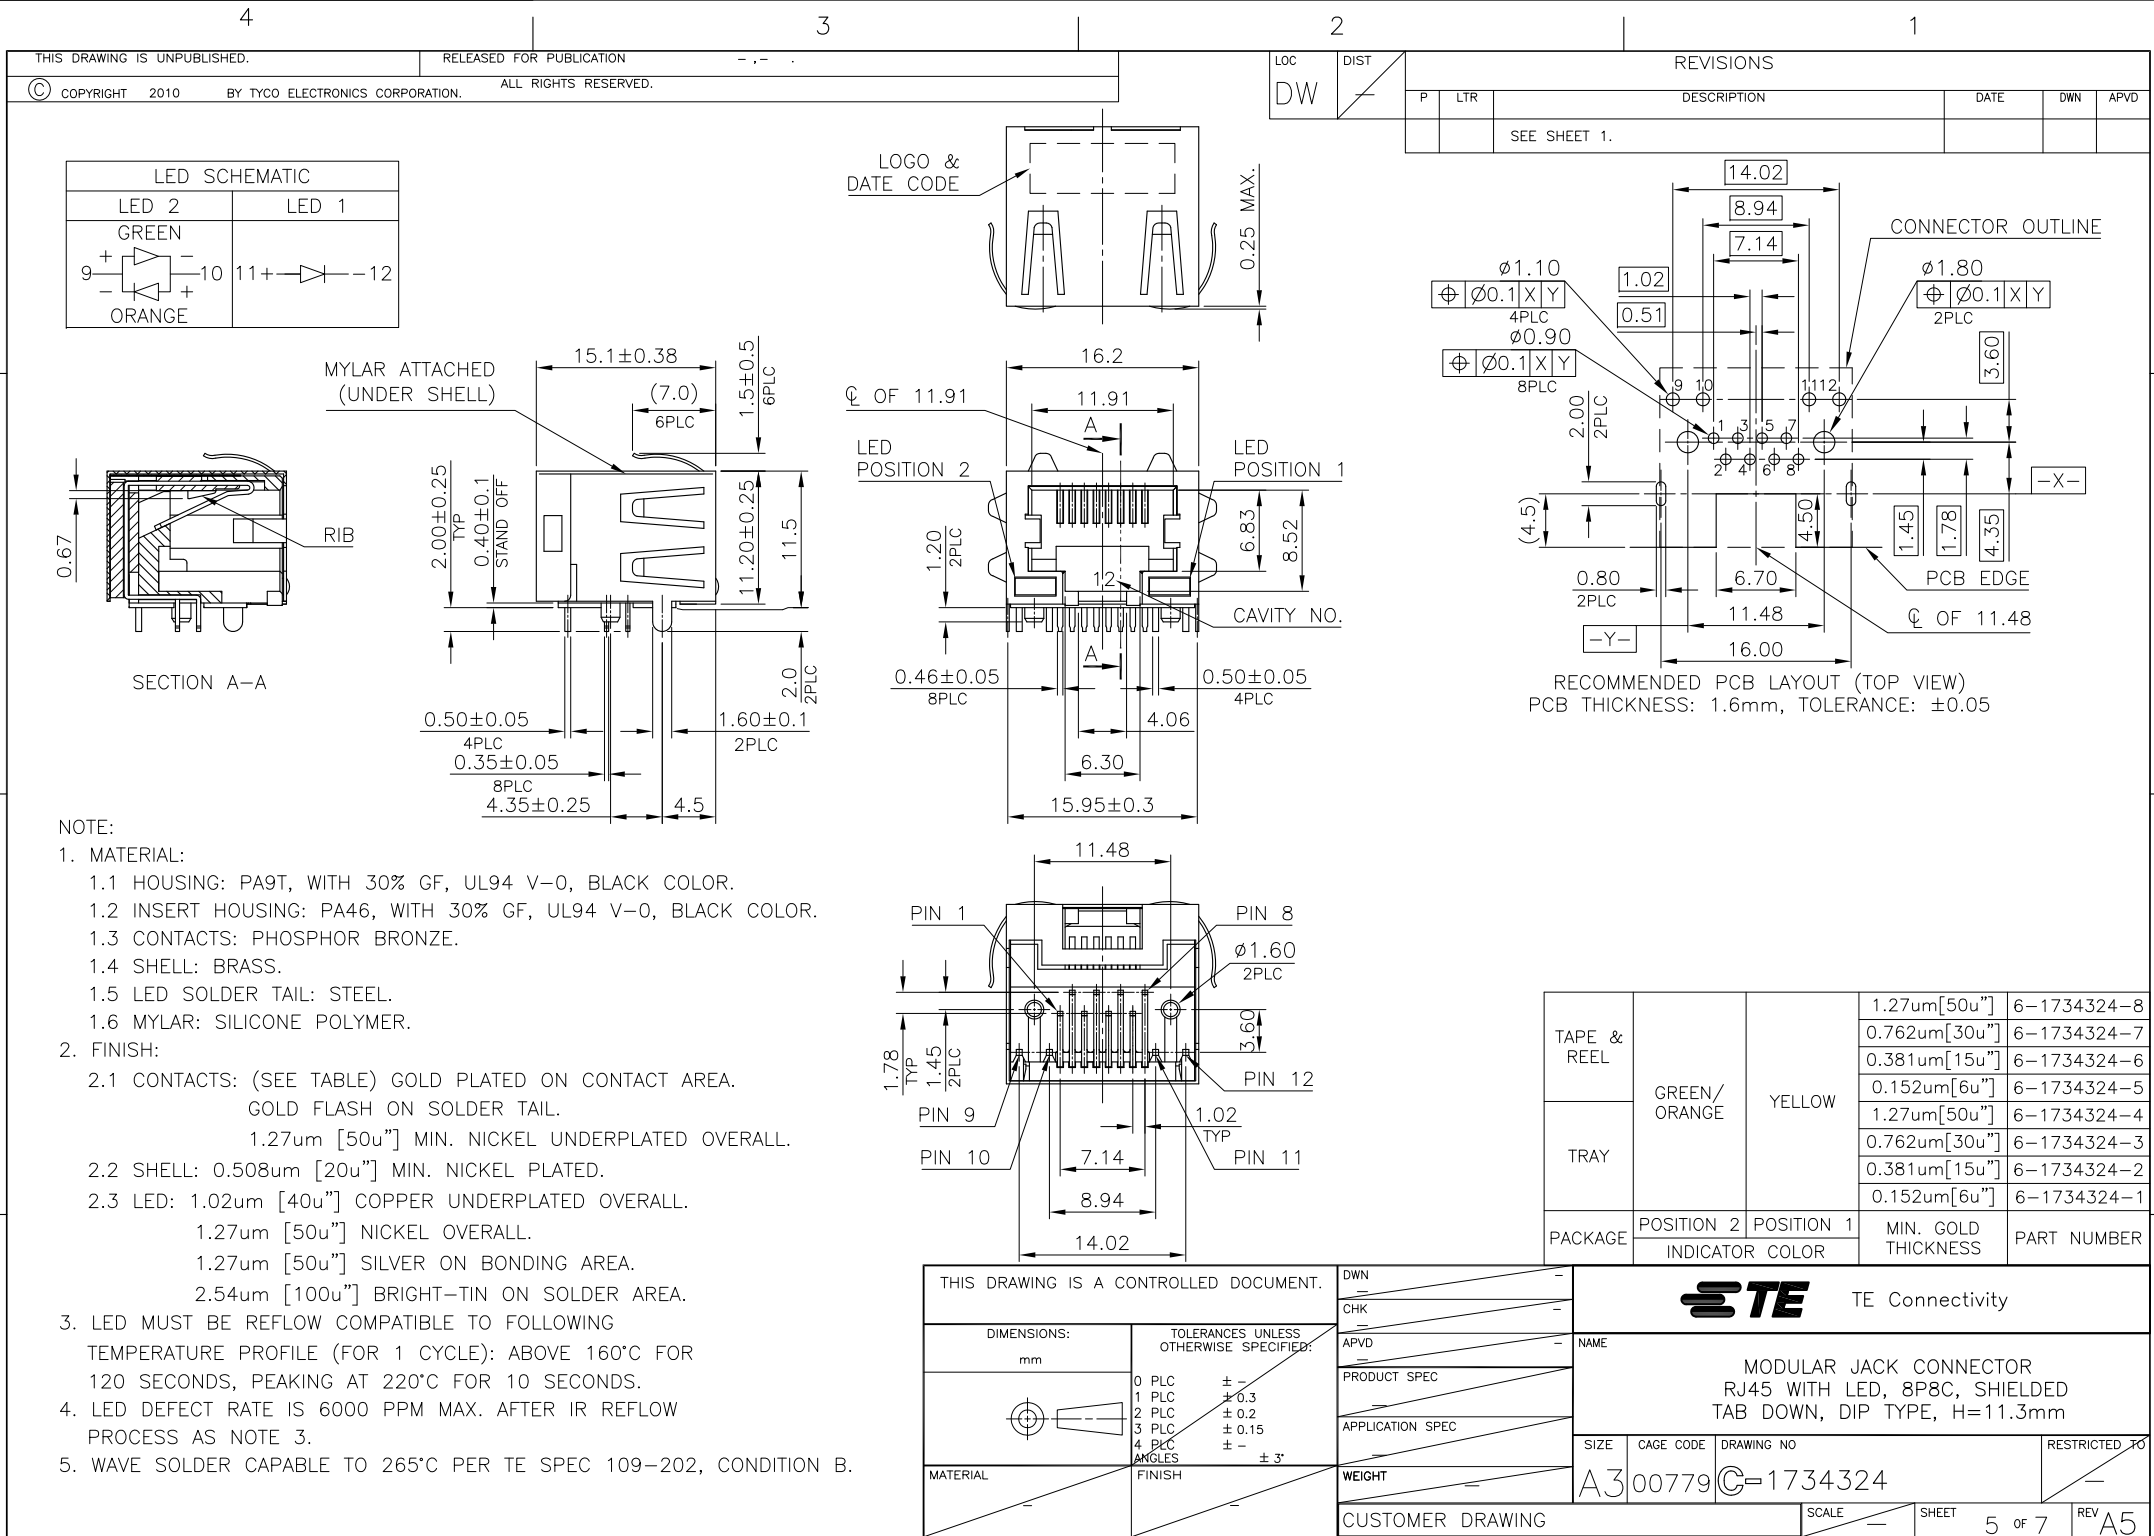

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.



COPYRIGHT 2010

BY TYCO ELECTRONICS CORPORATION.

LOC
DW

DIST

REVISIONS

P

LTR


DESCRIPTION

DATE






DWN

APVD

SEE SHEET 1.

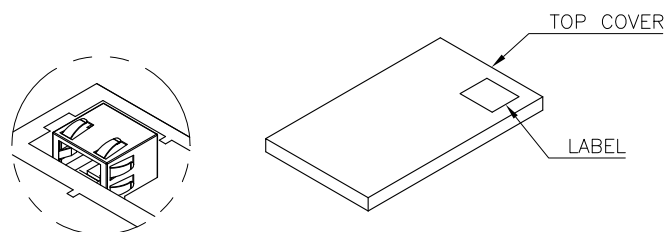

DETAIL C

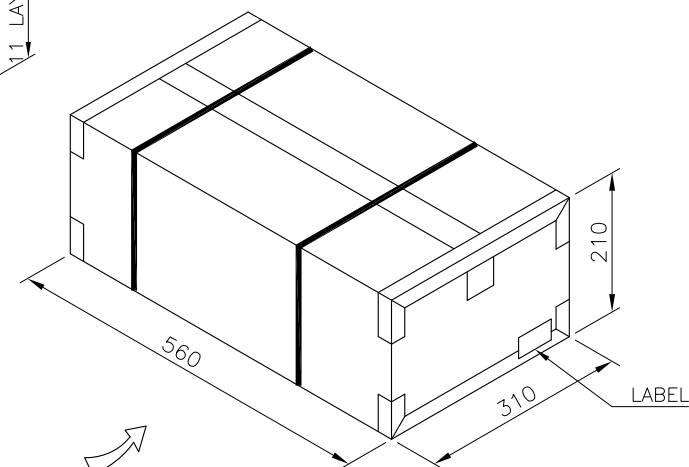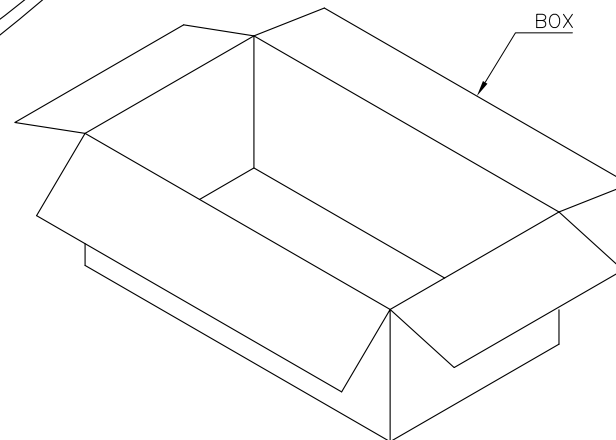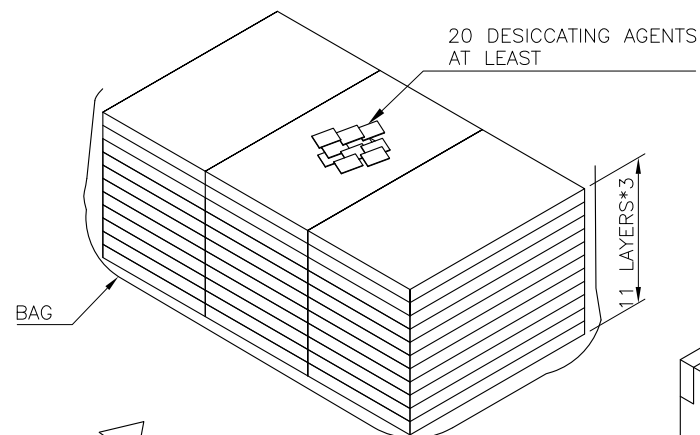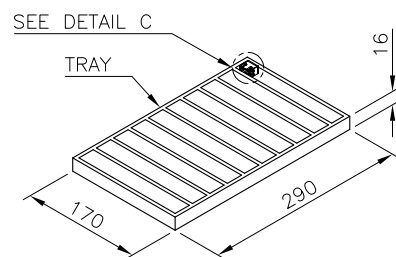

13Kg	11.1Kg	80	33	2640	6-1734324-1~4
					5-1734324-X
					7-1734324-X
					4-1734324-X
					2-1734324-X
					1734324-X
GROSS WEIGHT	NET WEIGHT	PCS /TRAY	TRAY /BOX	PCS /BOX	PART NUMBER

NOTES:

1. MATERIAL:
TRAY: PVC.
BOX: CORRUGATED FIBER.
2. DIMENSION: SEE DRAWING
3. QUANTITY: SEE TABLE
4. WEIGHT: SEE TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± 1 PLC ±0.3 2 PLC ±0.2 3 PLC ±0.15 4 PLC ± ANGLES ± 3°
MATERIAL	FINISH

DWN	—
CHK	—
APVD	—
PRODUCT SPEC	—
APPLICATION SPEC	—
WEIGHT	—
CUSTOMER DRAWING	—

STE

TE Connectivity

NAME					RESTRICTED TO
MODULAR JACK CONNECTOR RJ45 WITH LED, 8P8C, SHIELDED TAB DOWN, DIP TYPE, H=11.3mm					
SIZE	CAGE CODE	DRAWING NO			
A3	00779	C=1734324			—
SCALE			SHEET	6	OF 7
				REV	A5

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
DW

DIST

REVISIONS

P

LTR



DESCRIPTION

DATE

DWN






APVD

SEE SHEET 1.

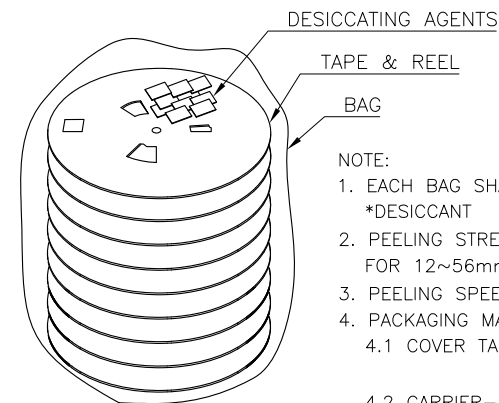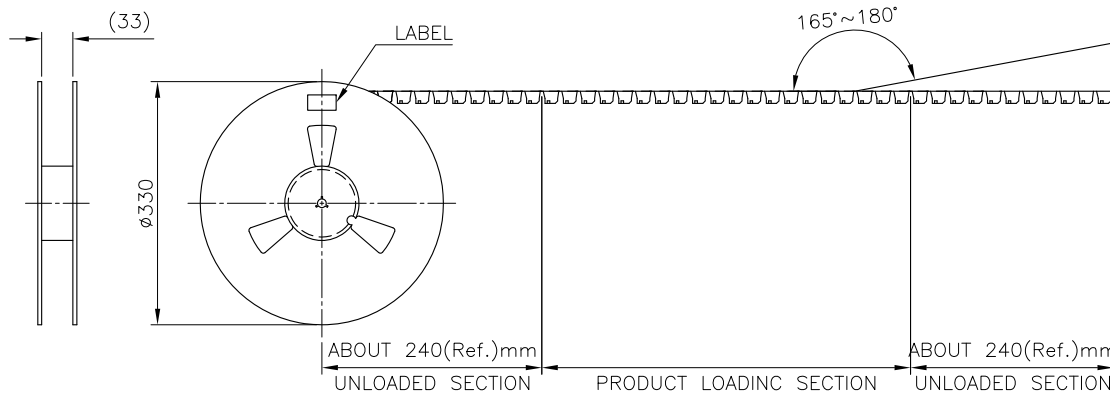

NOTE:

1. EACH BAG SHALL BE INCLUDED:
*DESICCANT
2. PEELING STRENGTH: $0.1 \sim 1.3N$ ($1 \sim 130$ GRAMS) FOR $12 \sim 56mm$ WIDE CARRIER TAPES
3. PEELING SPEED: 300mm/MINUTES.
4. PACKAGING MATERIAL:
 - 4.1 COVER TAPE—COMPOSITE OF POLYETHYLENE TEREPHTHALATE (PET)
 - 4.2 CARRIER—POLYSTYRENE (PS)
 - 4.3 CARRIER REEL—POLYSTYRENE

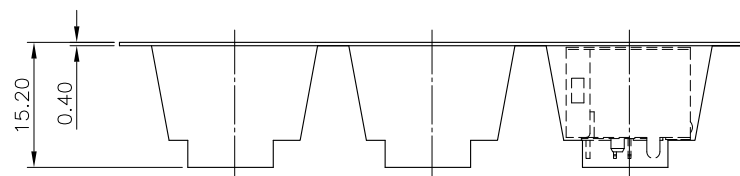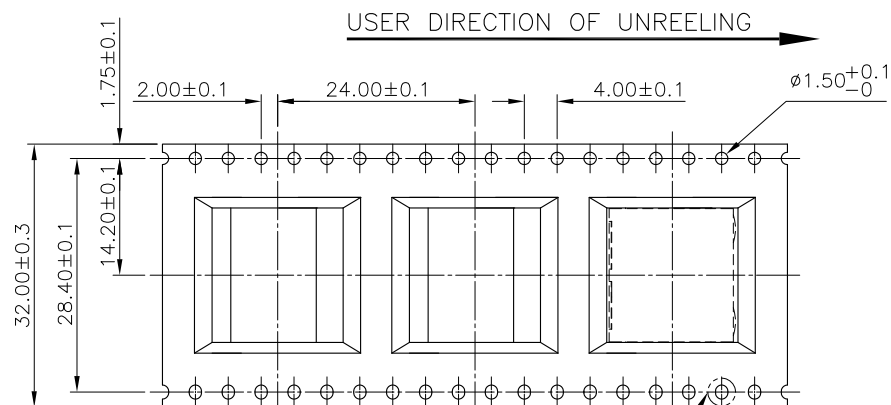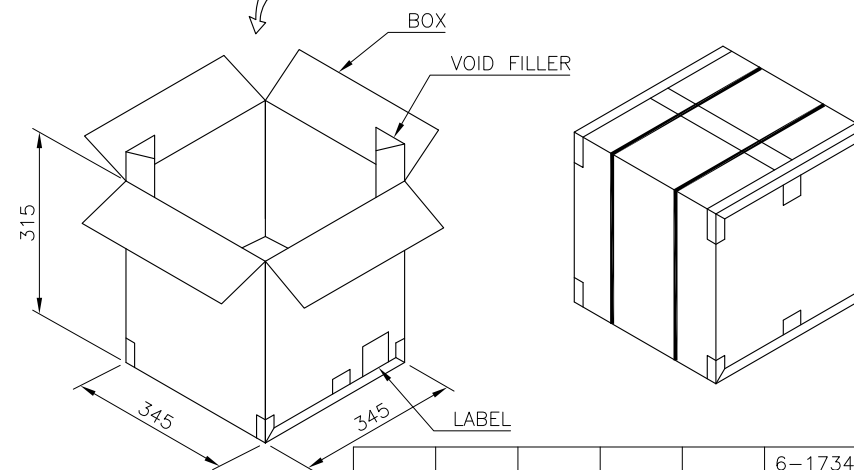

8.5KG	6.1KG	180	8	1440	6-1734324-5~8
					3-1734324-X
					1-1734324-X
GROSS WEIGHT	NET WEIGHT	PCS /REEL	REEL /BOX	PCS /BOX	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mmTOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	$\pm .$
1 PLC	± 0.3
2 PLC	± 0.2
3 PLC	± 0.15
4 PLC	$\pm .$
ANGLES	$\pm 3^{\circ}$

MATERIAL

FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

STE

TE Connectivity

NAME

MODULAR JACK CONNECTOR
RJ45 WITH LED, 8P8C, SHIELDED
TAB DOWN, DIP TYPE, H=11.3mm

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734324

SCALE

SHEET

7 of 7

REV A5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4-1734324-3](#)