



# TYS3010150M-10

## PHYSICAL DIMENSIONS:

|   |      |   |      |
|---|------|---|------|
| A | 3.00 | ± | 0.20 |
| B | 3.00 | ± | 0.20 |
| C | 1.00 | ± | 0.20 |
| D | 0.75 | ± | 0.20 |
| E | 1.50 | ± | 0.20 |

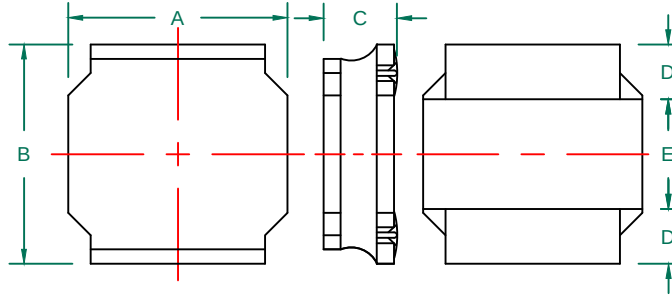



## RECOMMENDED SOLDERING CONDITIONS

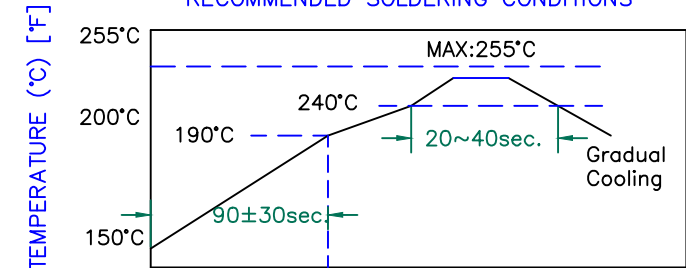


## ELECTRICAL SPECIFICATION

|                                           | Min   | Nom   | Max   |
|-------------------------------------------|-------|-------|-------|
| INDUCTANCE (uH)<br>L @ 100 KHz/1V<br>±20% | 12.00 | 15.00 | 18.00 |
| DCR (Ω)                                   |       | 0.610 | 0.793 |


|                                 |      |
|---------------------------------|------|
| Saturation Current(A)           | 0.42 |
| SRF (MHz)                       | 30   |
| Temperature Rise<br>Current (A) | 0.47 |



## CHARACTERISTICS OF TEMPERATURE RISE

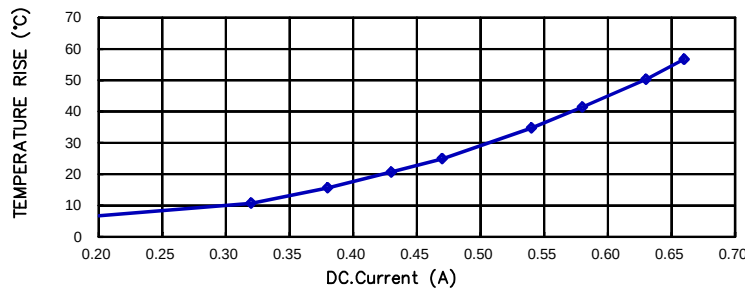

## CURRENT VS INDUCTANCE DROP IN RATES

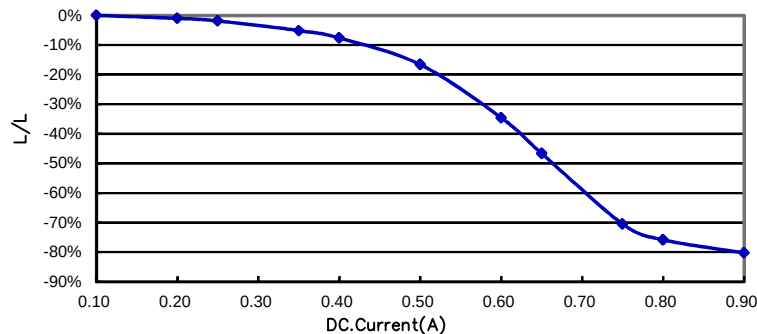

## NOTES:

1. OPERATION TEMPERATURE RANGE: -40°C~+125°C (INCLUDING SELF-HEATING).
2. STORAGE TEMPERATURE RANGE (PACKAGING CONDITIONS): -10°C TO +40°C AND RH 70% (MAX.)
3. UNLESS OTHERWISE SPECIFIED, THE STANDARD ATMOSPHERIC CONDITIONS FOR MEASUREMENT/TEST AS:  
A. AMBIENT TEMPERATURE: 20±15°C.  
B. RELATIVE HUMIDITY: 65%±20%.
4. SATURATION CURRENT IS THE DC CURRENT AT WHICH THE INDUCTANCE DROPS OFF APPROXIMATELY 30% FROM ITS VALUE WITHOUT CURRENT.(AMBIENT TEMPERATURE 25±5°C)
5. TEMPERATURE RISE CURRENT (IRMS):  
DC CURRENT THAT CAUSES THE TEMPERATURE RISE ( $\Delta T \leq 40^\circ\text{C}$ ) FROM 25°C AMBIENT.

| DIMENSIONS ARE IN mm . |                                    |          |     | This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved. |  |  |  |
|------------------------|------------------------------------|----------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
| D                      | CHANGE DIMENSIONS: C/D/E           | 07/28/16 | QIU | PROJECT/PART NUMBER:<br><b>TYS3010150M-10</b>                                                                                                                                                                                                           |  |  |  |
| C                      | CHANGE TEMP FROM -25°C~+125°C      | 12/17/12 | QIU |                                                                                                                                                                                                                                                         |  |  |  |
| B                      | CHE TEMP, TOLERANCE, LAND PATTERNS | 03/19/12 | QIU | DATE: 11/22/11<br>SCALE: NTS<br>SHEET: 1 of 1                                                                                                                                                                                                           |  |  |  |
| A                      | ORIGINAL DRAFT                     | 11/22/11 | QIU |                                                                                                                                                                                                                                                         |  |  |  |
| REV                    | DESCRIPTION                        | DATE     | INT | TYS3010150M-10-D                                                                                                                                                                                                                                        |  |  |  |



REV D PART TYPE: POWER INDUCTOR DRAWN BY: QIU

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Laird:

[TYS3010150M-10](#)