


## PCB terminal block - FFKDSA1/V-2,54-15 - 1986615

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCB terminal block, nom. voltage: 160 V, pitch: 2.54 mm, number of positions: 15, connection method: Push-in spring connection, mounting: Wave soldering, color: green


The figure shows the 10-position version

### Your advantages

- ✓ Time saving push-in connection, tools not required
- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Intuitive use through colour coded actuation lever
- ✓ Operation and conductor connection from one direction enable integration into front of device
- ✓ Two solder pins reduce the mechanical strain on the soldering spots
- ✓ The latching on the side enables various numbers of positions to be combined
- ✓ Vertical connection enables multi-row arrangement on the PCB



### Key Commercial Data

Packing unit	10 pc
GTIN	 4 017918 921552
GTIN	4017918921552

### Technical data

#### Dimensions

Length [ l ]	12.6 mm
Pitch	2.54 mm
Dimension a	35.56 mm
Width [ w ]	40.6 mm
Height	13.6 mm
Height [ h ]	17 mm
Solder pin [P]	3.4 mm
Pin spacing	5.08 mm

## PCB terminal block - FFKDSA1/V-2,54-15 - 1986615

### Technical data

#### Dimensions

Hole diameter	1.1 mm
---------------	--------

#### General


Range of articles	FFKDS(A) 0,5/...-V
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/2)	160 V
Rated voltage (II/2)	320 V
Connection in acc. with standard	EN-VDE
Nominal cross section	0.5 mm <sup>2</sup>
Number of positions	15

#### Standards and Regulations


Connection in acc. with standard	EN-VDE
	CSA

### Drawings

Drilling diagram



Dimensional drawing

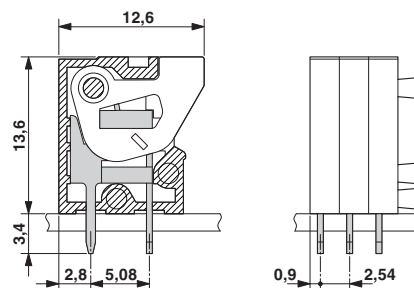

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

1986615