


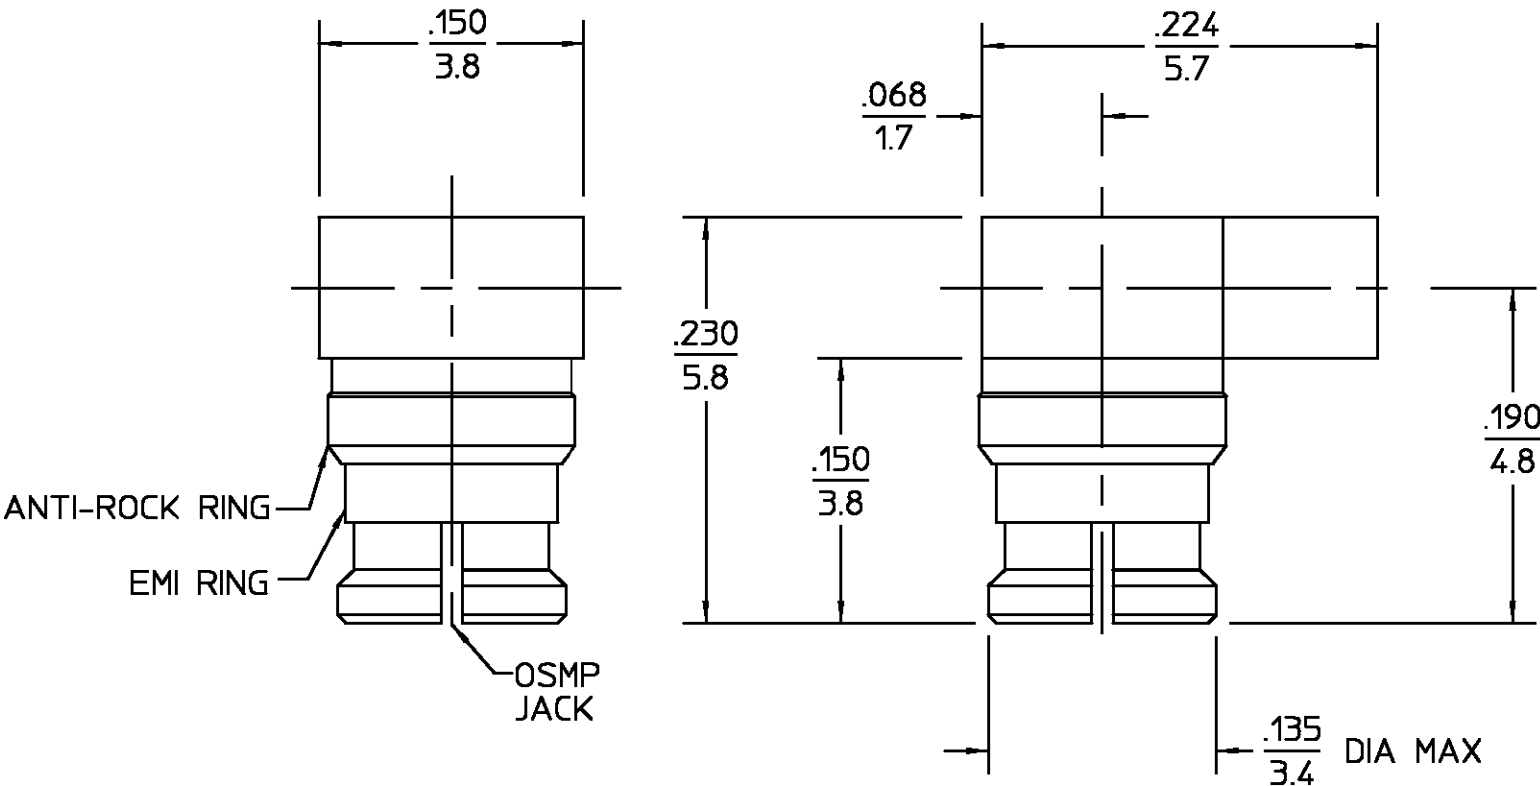

ELECTRICAL		MECHANICAL		ENVIRONMENTAL		HOUSING		MATERIAL		FINISH		
Nominal Impedance (Ohms) 50		Force to Engage (Lbs MAX) 15		Temperature Rating -65°C To +125°C		DIELECTRIC		BERYLLIUM COPPER PER ASTM-B-196, ALLOY C17300, CONDITION H		GOLD PLATE PER MIL-G-45204		
Frequency Range (GHz) DC to 40		Disengage (Lbs MIN) 2.0		Vibration MIL-STD-202, Method 204, Condition D		CENTER CONTACT CONTACT FINGER ANTI-ROCK RING EMI RING		TFE FLUOROCARBON PER ASTM-D-1457		N/A		
Volt Rating (VRMS MAX) @ Sea Level 335		Center Contact Retention 1.5 Lbs MIN		Thermal Shock MIL-STD-202, Method 107, Condition B,				BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H		GOLD PLATE PER MIL-G-45204		
VSWR 1.35 MAX @ 26.5 GHz		Durability 100 cycles		Corrosion - MIL-STD-202, Method 101, Condition B		COMPONENT						
Insertion Loss .12f GHz dB MIN						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON		DRAWN BY  DATE 10/08/92		 AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599		
Corona, 70,000 Ft (VRMS MIN) 190		DESIGNED FOR USE WITH .047 DIA S.R.				FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°		CHECKED BY				
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 500		CABLE ENTRY DIAMETER MINIMUM				These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		APPD BY  4/12/94		TITLE OSMP RIGHT ANGLE CABLE JACK - DIRECT SOLDER ATTACHMENT		
Contact Resistance (Milliohms MAX) Center Contact 6.0 Outer Contact 2.0 Cable to Housing 0.5		HOUSING .050				USE ASS'Y PROCEDURE 408-04755 29-003 NO. A.P. _____		SIZE B		CODE IDENT NO. 26805	2908-7947-62	REV 02 0
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 325								SCALE 10:1		SHEET 1 OF 1		
I.R.(Megohms MIN) 5000												

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2908-7947-62](#)