


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	G	Contact pin base material change from CuSn (Phosphor bronze) to CuZn (Brass). Plating change from min. 0.8microns gold plating to min. 0.7µm Pd Ni + 0.1µm gold flash at contact area (Area F).		24JUN2014	TJ	JK	

NUMBER 825440	
VERWENDET FÜR E 92-9802	
WAR NR. —	

POLZ. PRO REIHE	L±0.5	BESTELL-NR.
—	—	—
2	5.08	825 440 -2
3	7.62	-3
4	10.16	-4
5	12.70	-5
6	15.24	-6
7	17.78	-7
8	20.32	-8
9	22.86	-9
10	25.40	1-
11	27.94	1-
12	30.48	1-
13	33.02	1-
14	35.56	1-
15	38.10	1-
16	40.64	1-
17	43.18	1-
18	45.72	1-
19	48.26	1-
20	50.80	2-
21	53.34	2-
22	55.88	2-
23	58.42	2-
24	60.96	2-
25	63.50	2-
26	66.04	2-
27	68.58	2-
28	71.12	2-
29	73.66	2-
30	76.20	3-
31	78.74	3-
32	81.28	3-
33	83.82	3-
34	86.36	3-
35	88.90	3-
36	91.44	3-
37	93.98	3-
38	96.52	3-
39	99.06	3-
40	101.60	4-
41	104.14	4-
42	106.68	4-
43	109.22	4-
44	111.76	4-
45	114.30	4-
46	116.84	4-
47	119.38	4-
48	121.92	4-
49	124.46	4-
50	127.00	5- 825 440 -0

CAD-ORIGINAL
 ZEICHNUNG NICHT ÄNDERN

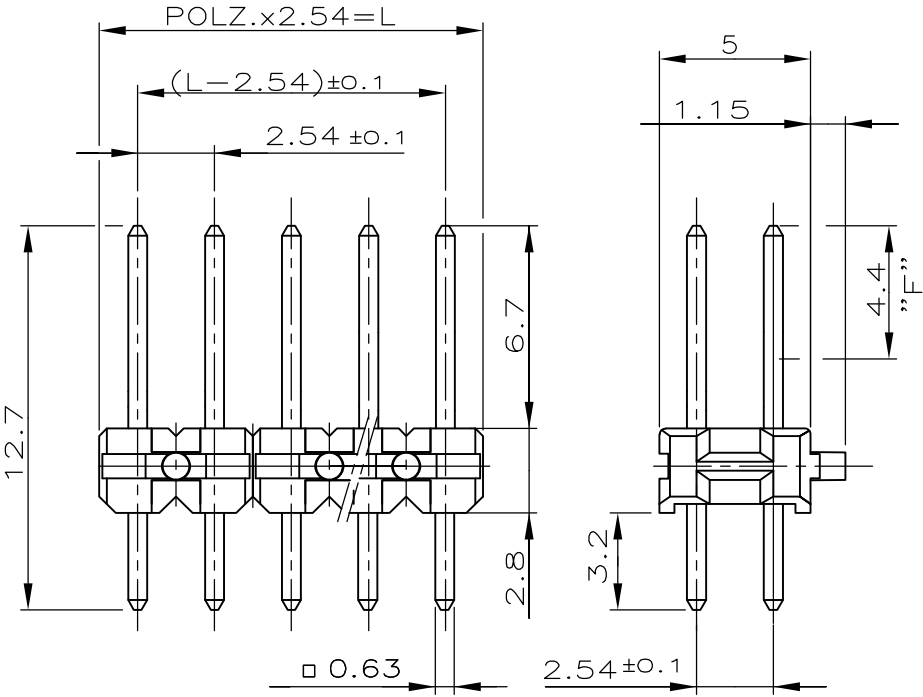

POLZ.x2.54=L
 (L-2.54)±0.1
 2.54 ±0.1
 12.7
 6.7
 2.8
 5
 1.15
 4.4 "F"
 3.2
 0.63
 2.54 ±0.1

⚠ STECKSEITE: IM BEREICH "F" MIN 0.7µmPdNi+0.1µm GOLD FLASH ÜBER 1.27 µm NICKEL.
 LÖTSEITE: MIN. 2.5 µm ZINN ÜBER 1.27 µm NICKEL

KONTAKTSTIFT	Cu Zn	⚠
STIFTGEHÄUSE	PBT GV	GRÜN
BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE

DIMENSIONS:
mm
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 ±0.2 mm
 0 PLC ± -
 1 PLC ± -
 2 PLC ± -
 3 PLC ± -
 4 PLC ± -
 ANGLES ± -

DWN 22.06.84
 M.SCHAARSCHMIDT
 CHK -
 APVD -
 PRODUCT SPEC
 108-18012
 APPLICATION SPEC
 -
 WEIGHT -

MATERIAL -
 FINISH -



 TE Connectivity

 NAME
 AMPMODU II PIN HEADER, DUAL ROW
 SIZE A4 CAGE CODE 00779 DRAWING NO C-825440 RESTRICTED TO -
 CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 2 REV G

LOC
—

DIST
—

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

—

—

SEE SHEET 1

—

—

—

VERWENDET FÜR
E 92-9802

WAR NR. —

CAD-ORIGINAL
ZEICHNUNG NICHT ÄNDERN

Polz. pro Reihe	L±0.5	Bestell-Nr.	Bemerkung
1	2.54	5- -1	
2	5.08	5- -2	
3	7.62	5- -3	
4	10.16	5- -4	
5	12.70	5- -5	
6	15.24	5- -6	
7	17.78	5- -7	
8	20.32	5- -8	
9	22.86	5- -9	
10	25.40	6- 0	
11	27.94	6- -1	
12	30.48	6- -2	
13	33.02	6- -3	
14	35.56	6- -4	
15	38.10	6- -5	
16	40.64	6- -6	
17	43.18	6- 825 440 -7	△
18	45.72	6- -8	
19	48.26	6- -9	
20	50.80	7- 0	

△ VERPACKUNG:25 STÜCK IN PLASTIK-DOSE
PN 165 439-1 MIT PLASTIK-DECKEL
PN 165 440-1

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE

BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE
ZEICHNUNG GÜLTIG AB KW 39./96		

DIMENSIONS:
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

DWN A.HO 07.06.84
CHK M.SCHAARSCHMIDT 13.06.84
APVD -
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

MATERIAL -

FINISH -

TE Connectivity

NAME
AMPMODU II STIFTLEISTE
ZWEIREIHIG

SIZE A4
CAGE CODE 00779
DRAWING NO C-825440

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE 4:1

SHEET 2 OF 2

REV G

1469-35 (3/11)

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

By -
COPYRIGHT -



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-825440-5](#)