
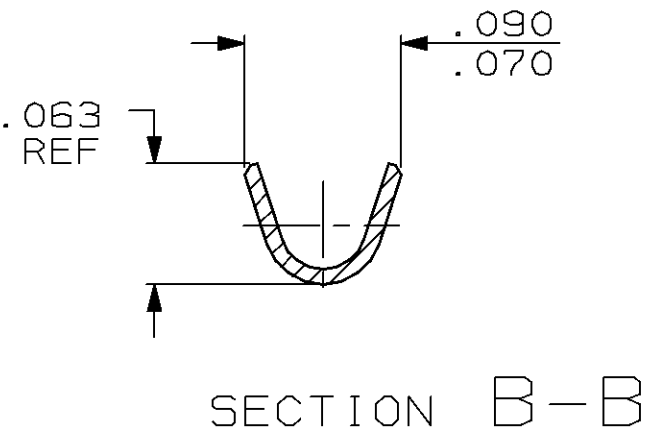
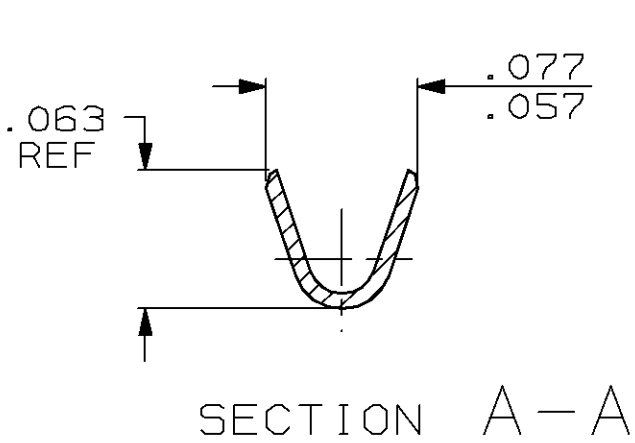


MOD	LOC	DIST	P	F	REVISIONS			
					ZONE	LTR	DESCRIPTION	DATE
1	BD	20				D	REVISED & REDRAWN PER SP-46	8-27-87
						E	REVISED ECN-SP-84	2-11-88
						F	REVISED ECN-SP-112	3-30-88
						G	OBS -3 PER EC 0020-1416-94	11/25/94

- 1 WIRE RANGE : #28 - #22 AWG
- 2 INSULATION RANGE : .054 - .036 DIA.
- 3 DUPLEX PLATED .000150 MIN. TIN/LEAD ON WIRE BARREL END FOR LENGTH OF .360, .0000150 MIN. THK. GOLD ON MATING END FOR LENGTH OF .200 WITH ENTIRE CONTACT UNDERPLATED .000100 MAX. THK. NICKEL.
- 4 TIN PLATE .000050 MIN. THK OVER NICKEL.
- 5 SILVER PLATE .000100 MIN. THK. OVER COPPER.

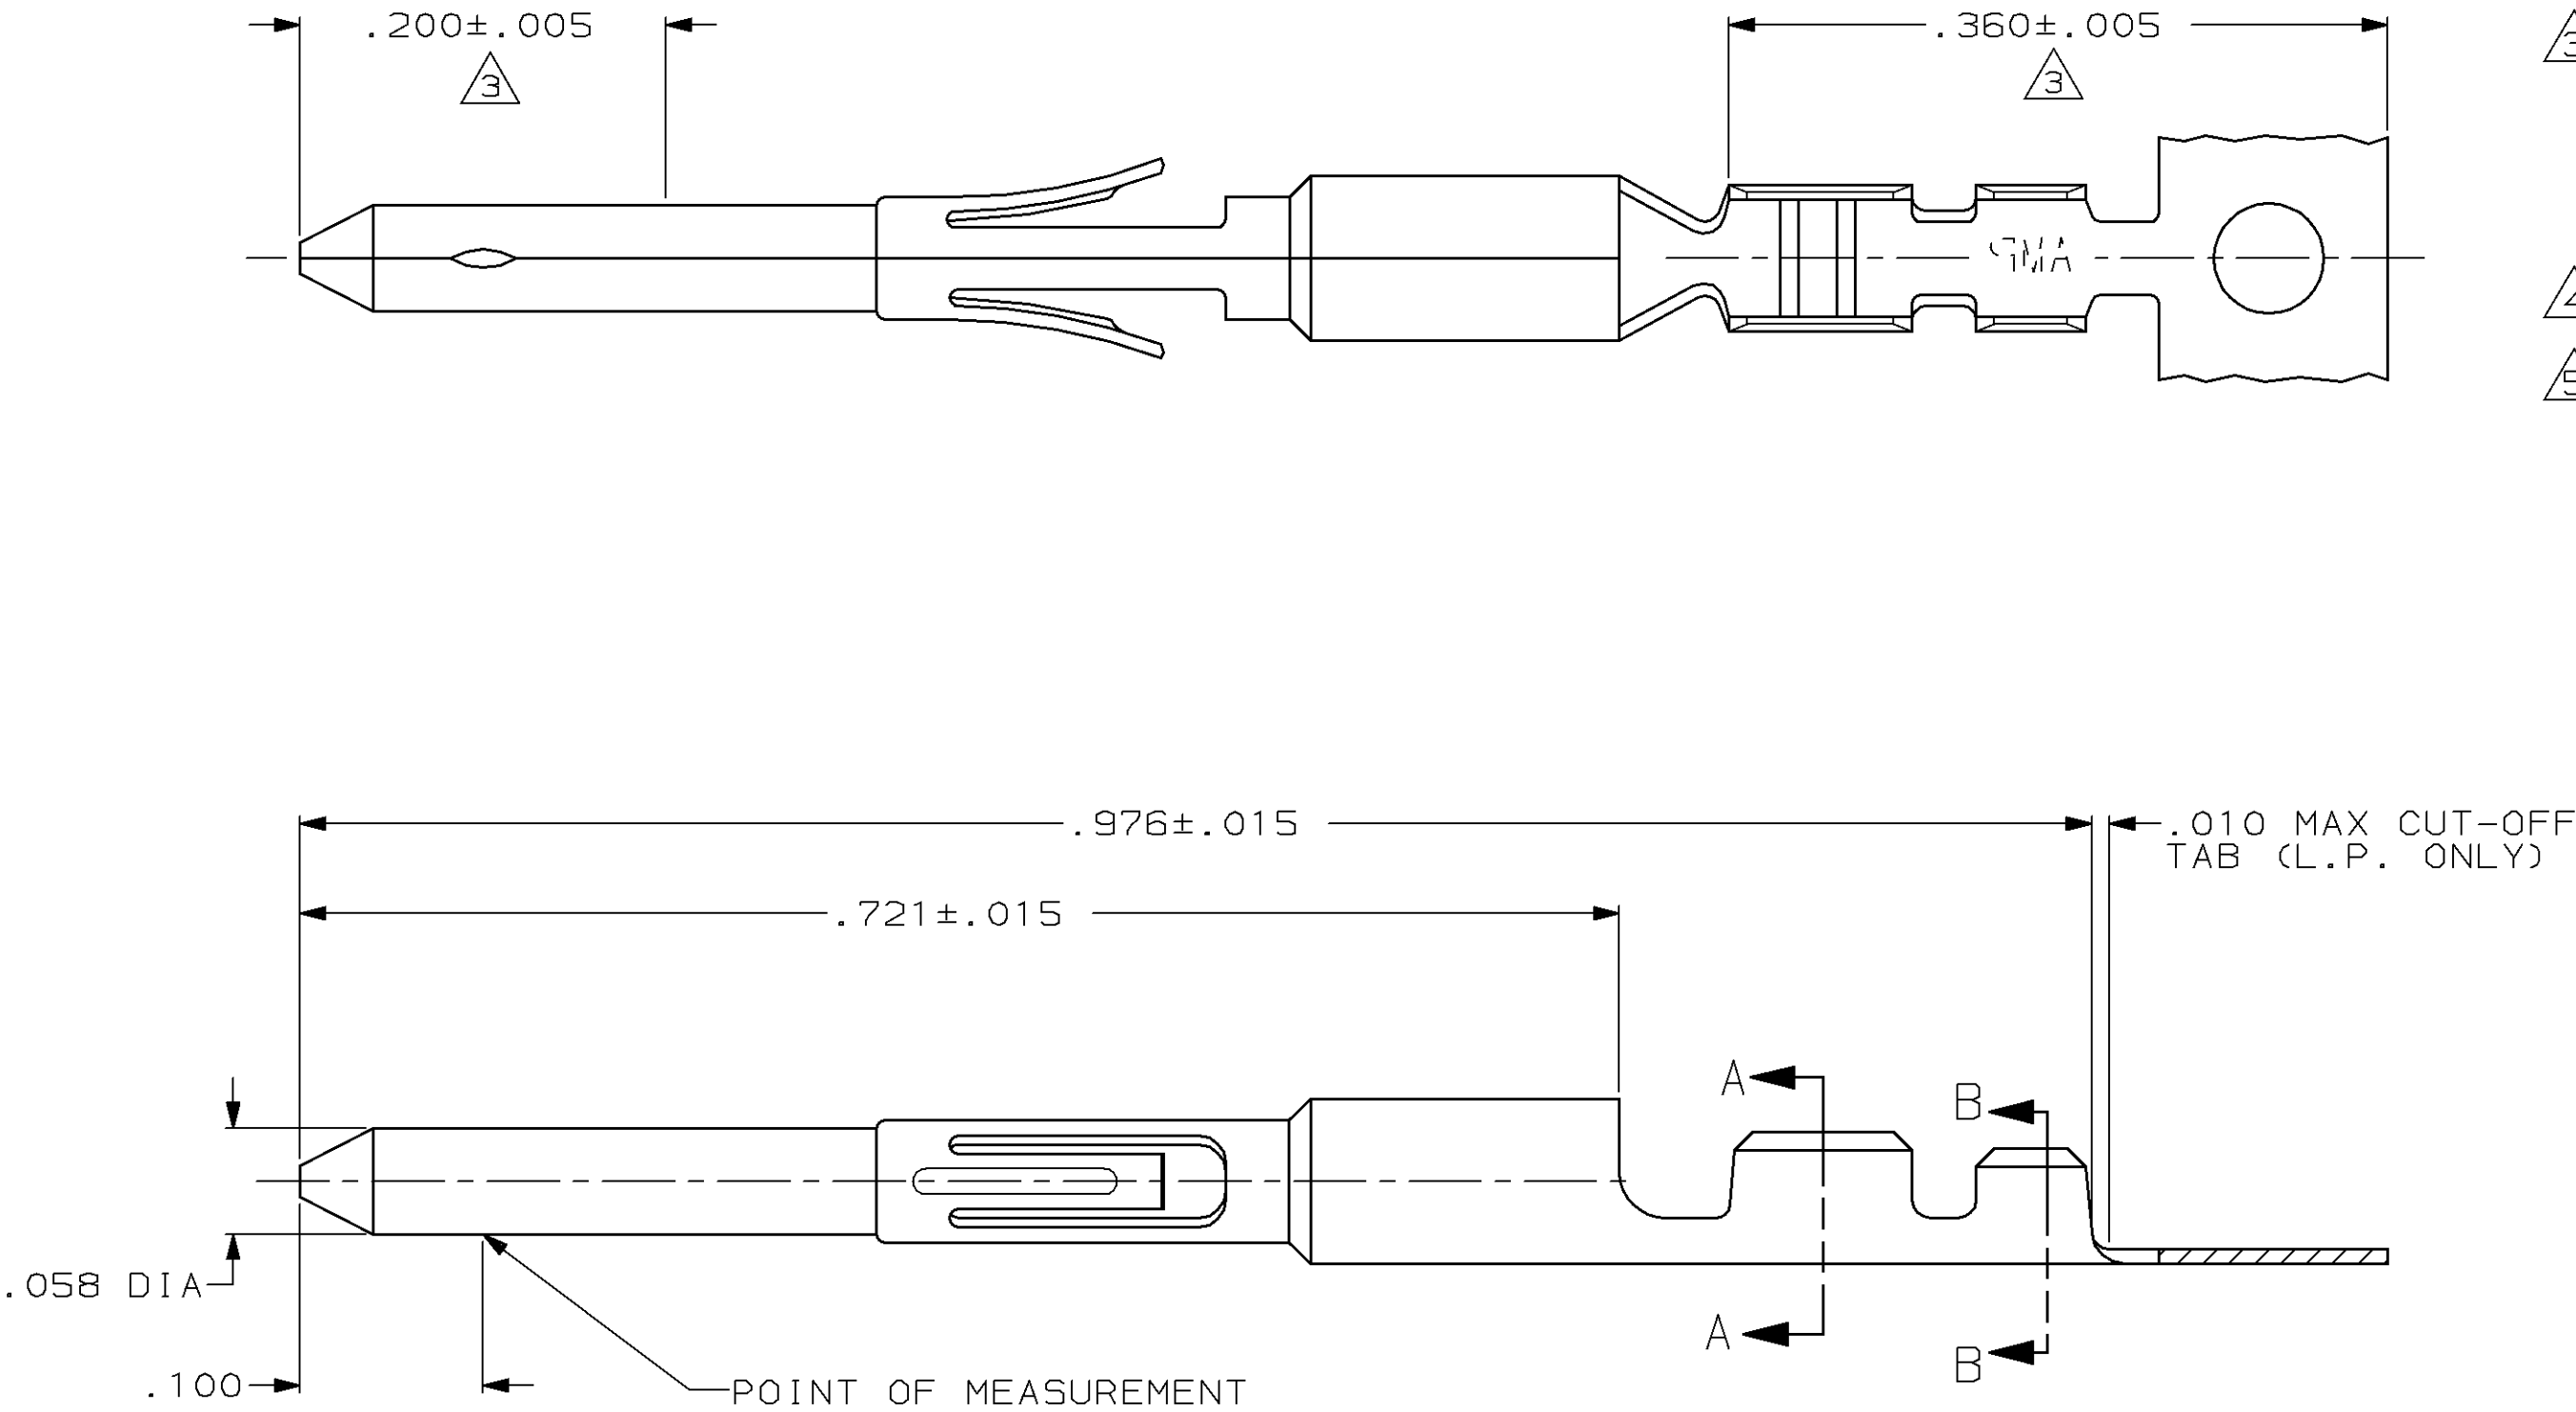

OBSOLETE		66728-3
	66728-5	66728-2
OBSOLETE	66728-4	66728-1

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -		DR 10-13-87 L.SIPE	AMP AMP INCORPORATED Harrisburg, Pa. 17105	
MATERIAL BRASS PER MIL-C-50		CHK 10-13-87 S.WELDON		
FINISH SEE DASH NO'S		APPD 10-13-87 D.NEIDIG	NAME CIRCULAR DIN, PIN CONTACT	
		APPD 10-13-87 V.KUMAR		
		PRODUCT SPEC -	SIZE C 00779	
		APPLICATION SPEC -	DRAWING NO 66728	
		WEIGHT -	SCALE 10:1	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[66728-2](#)