

No OF POSITIONS -01 THRU -50

BCS-1XX-XXX-X-XXX

PLATING SPECIFICATIONS (SEE TABLE 1)

MATTE TIN CONTACT AND TAIL

10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA MATTE TIN ON TAIL

3µ" FLASH SELECTIVE GOLD CONTACT AREA, MATTE TIN ON TAIL

30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

30µ" HEAVY GOLD IN CONTACT AREA 3u" GOLD ON TAIL

-SM: 30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-TM: MATTE TIN CONTACT AND TAIL

-LM: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA MATTE TIN ON TAIL

-FM: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-LTL: 10µ'' LIGHT SELECTIVE GOLD IN CONTACT AREA,

BODY SPECIFICATION

-S: SINGLE ROW (SEE TABLE 1)

POLARIZING OPTION

-DE: DUAL ENTRY (SEE TABLE 1)

-HE: HORIZONTÀL ENTRY (SEE TABLE 1)

-PE: PASS-THROUGH ENTRY (SEE TABLÉ 1)

-TE: TOP ENTRY (SEE TABLE 1)

INSERT PK-06-N INTO SPECIFIED

(NOT AVAILABLE FOR -BE OPTION)

POS AND BREAK OFF TAB

-D: DOUBLE ROW (SEE TABLE 1)


ENTRY SPECIFICATION

-DE-BE: (SEE TABLE 1)

-PE-BE: (SEE TABLE 1)

TIN LEAD (90/10 +/-5%) ON TAIL


5		5	.119 [3.02] © (SEE NOTE 9)		290 [7.37] REF
			CONTACT #1-		
FIG	-DE/-DE-BE 1 (SEE NOTE 1	1)	2° MAX SWAY IN EITHER DIRECTION SEC	CTION "A"-"A	— .16[4.1] () —2° MAX SWAY




ENTRY SPEC	BODY SPEC	CONTACT #1	CONTACT #2
-S-DE (SEE FIG 1)	SSM-XX-S	C-95-01-X	
-D-DE (SEE FIG 1)	SSM-XX-D	C-95-01-X	
-S-TE (SEE FIG 3)	SSM-XX-S	C-95-09-X	
-D-TE (SEE FIG 3)	SSM-XX-D	C-95-09-XXX	
-S-HE (SEE FIG 2)	BCH-XX-S	C-58-05-X	
-D-HE (SEE FIG 2)	BCH-XX-D	C-58-04-X	C-58-03-X
-S-PE (SEE FIG 4)	SSM-XX-S	C-166-10-X	
-D-PE (SEE FIG 4)	SSM-XX-D	C-166-10-X	
-S-DE-BE (SEE FIG 1)	SSM-XX-S-BE	C-95-01-X	
-D-DE-BE (SEE FIG 1)	SSM-XX-D	C-95-01-X	
-S-PE-BE (SEE FIG 4)	SSM-XX-S-BE	C-166-10-X	
-D-PE-BE (SEE FIG 4)	SSM-XX-D	C-166-10-X	

TABLE 1

SECTION "B"-"B" BCS-1XX-X-S-DE BCS-1XX-X-D-DE






(-TE TAIL ORIENTATION)

NOTES:

- 1. © REPRESENTS CRITICAL DIM. FOR STATISTICAL PROCESS CONTROL.
- 2. MINIMUM PUSHOUT FORCE TO BE: 1 LB.
- 3. [] DIMENSIONS ARE IN MILLIMETERS.
- 4. MINIMUM WALL THICKNESS ON CUT PARTS: .009 [0.23].
- 5. CUT PARTS TO BE SYMMETRICAL ABOUT Q
- 6. 1st POSITION WILL ALWAYS POINT UP ON TOP VIEW AS SHOWN.
- 7. 1 THROUGH 4 POSITIONS ARE TO BE LAYER PACKAGED, 5 THROUGH 50 POSITIONS ARE TO BE TUBED FOR ALL ENTRY SPECIFICATION EXCEPT BCS-S-HE AND BCS-D-HE. FOR BCS-S-HE AND BCS-D-HE. 1 THROUGH 3 POSITIONS ARE TO BE LAYER PACKAGED, 4 THROUGH 50 POSITIONS ARE TO BE TUBED.
- 8. DAMAGE TO THE CUT SURFACE CAN NOT EFFECT LEAD-IN OF THE CORES.
- 9. MAXIMUM VARIATION WITHIN A ROW: .006 [0.15]. MAXIMUM VARIATION FROM ROW TO ROW: .012 [0.30].
- MAXIMUM CUT FLASH: .015 [0.38]
- 11. CHAMFERED END-WALLS MAY OR MAY NOT BE PRESENT ON ONE OR BOTH ENDS OF FINISHED GOOD.



(-HE TAIL ORIENTATION)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.

TOLERANCES ARF: DECIMALS ANGLES

.XX: ±.01[0.3] .XXX: ±.005[0.13] .XXXX: ±.0020[0.051]

PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS
AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS

SHEET SCALE: 2:1

DO NOT SCALE DRAWING

INSULATOR: GLASS FILLED LCP UL 94 VO, COLOR: BLACK CONTACT: PHOS. BRONZE

F:\DWG\MISC\MKTG\BCS-1XX-XXX-X-XX-XXX-MKT.SLDDRW



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com

DESCRIPTION

POSITION 01


BOX CONNECTOR SOCKET STRIP


DWG. NO


S-1XX-XXX-X-XX-XXX

BY: KOLB

09/12/1991 | SHEET 1 OF 3

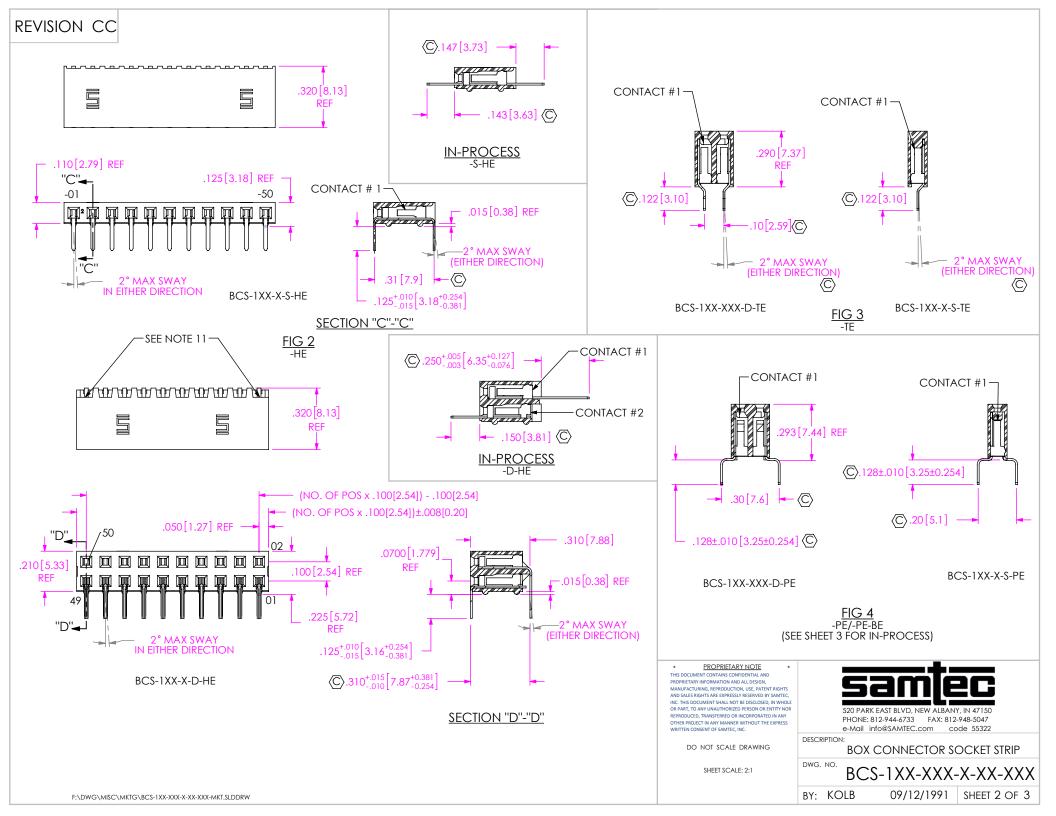

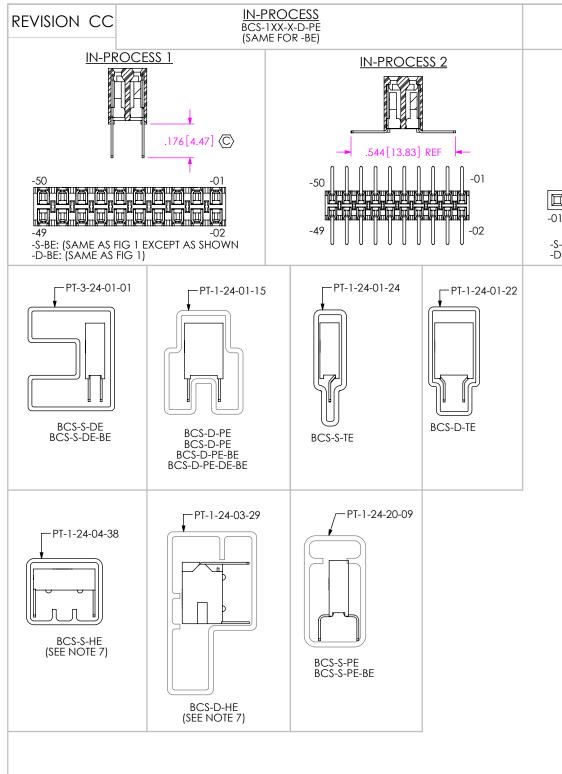



IN-PROCESS

BCS-1XX-X-S-PE

(SAME FOR -BE)

-S-PE-BE: (SAME AS -S-PE EXCEPT AS SHOWN) -D-PE-BE: (SAME AS -D-PE)

IN-PROCESS 2 .445[11.31] REF	
-02 -50 -01 (SEE NOTE 6) -49]

PART NUMBER	TUBE	PLUG
BCS-S-DE	PT-3-24-01-01	TP-03 (2)
BCS-D-DE	PT-1-24-01-15	TP-03 (2)
BCS-S-TE	PT-1-24-01-24	TP-24 (2)
BCS-D-TE	PT-1-24-01-22	TP-03 (2)
BCS-S-HE	PT-1-24-04-38	TP-03 (2)
BCS-D-HE	PT-1-24-03-29	TP-29 (2)
BCS-S-PE	PT-1-24-20-09	TP-03 (2)
BCS-D-PE	PT-1-24-01-15	TP-03 (2)
BCS-S-DE-BE	PT-3-24-01-01	TP-03 (2)
BCS-D-DE-BE	PT-1-24-01-15	TP-03 (2)
BCS-S-PE-BE	PT-1-24-20-09	TP-03 (2)
BCS-D-PE-BE	PT-1-24-01-15	TP-03 (2)

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSY RESERVED BY SAMPEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATE IN ANY OTHER PROLECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMPEC.

DO NOT SCALE DRAWING

SHEET SCALE: 2:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

DESCRIPTION:

BOX CONNECTOR SOCKET STRIP

DWG. NO.

° BCS-1XX-XXX-X-XXX

BY: KOLB 09/12/1991 SHEET 3 OF 3