



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14		U1	REVISED PER ECO-11-004917	11MAR11	RK	HMR

AMP WIRE RANGE	 Listed	 LR7189 Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

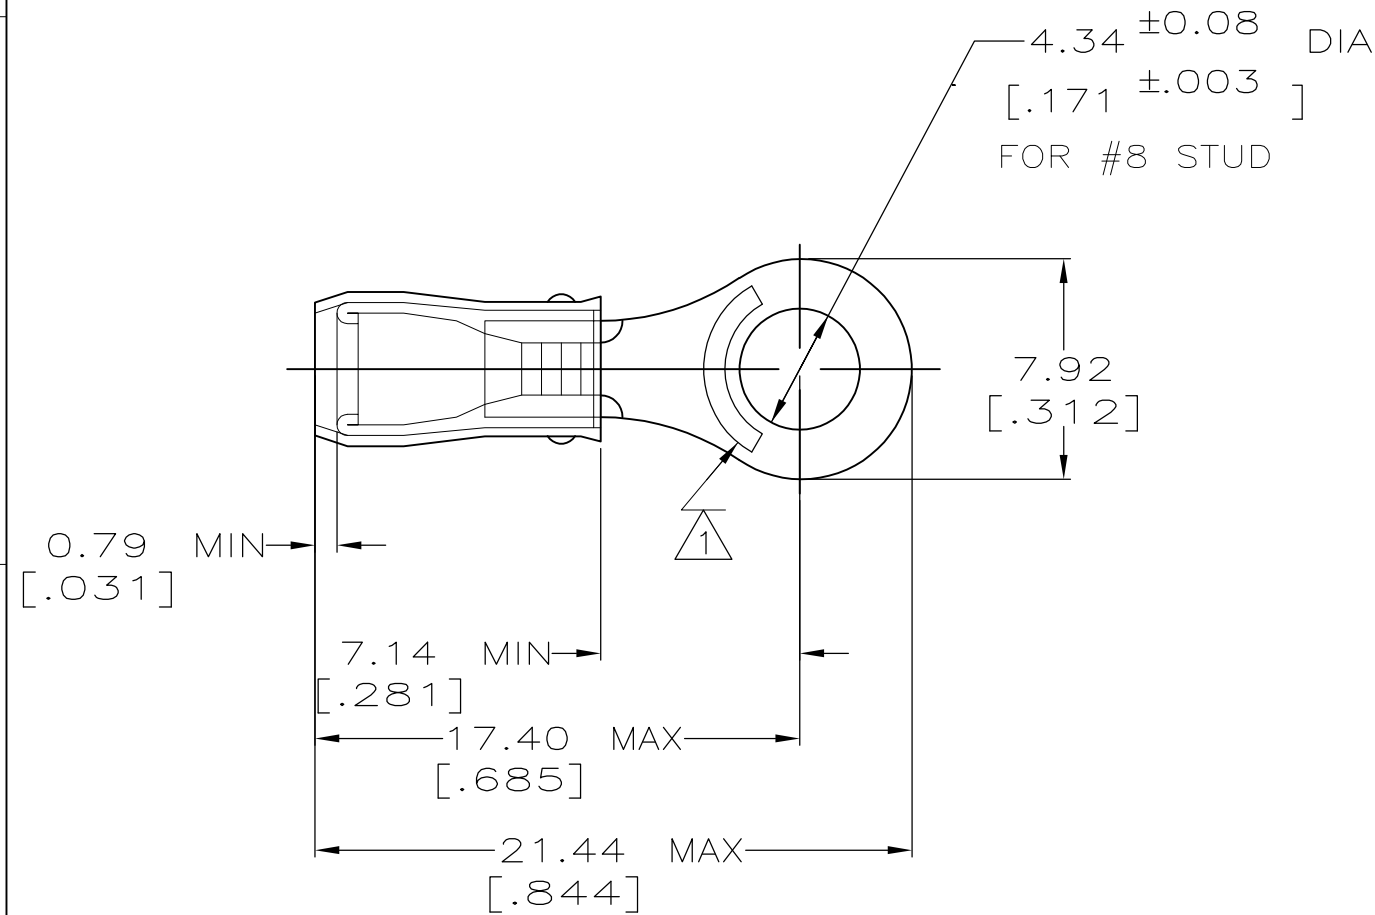

- 1 STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPEC MIL-T-7928
COMMERCIAL WIRE RANGE IS 22-16
- 2 WIRE INSULATION DIA: .080 - .125
- 3 TONGUE MATERIAL THK: 0.79 ±0.05 [.031 ±.002]
- 4 TIN PL 0.00254[.000100] MIN EXT
THK PER MIL-T-10727
- 5 GOLD PL 0.00127[.000050] MIN EXT
THK PER MIL-G-45204 TYPE II OVER
NICKEL PL 0.00762[.000030] MIN EXT
THK PER QQ-N-290

-	-	LOOSE PIECE	5 2-31888-1
-	-	LOOSE PIECE	4 31888
MILITARY P/N AND CLASS	QUANTITY	PACKAGE TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM 02/11/93	 TE Connectivity			
		CHK RE HERSEY 4/28/93				
DIMENSIONS: MM[INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD ML ELLIS 4/28/93	NAME			
	0 PLC ± -	PRODUCT SPEC	TERMINAL, RING TONGUE, PIDG™, WIRE SIZE, 22-16 AWG			
	1 PLC ± -	UL 486A				
	2 PLC ± 0.20[.008]	APPLICATION SPEC				
	3 PLC ± -	NOT AVAILABLE	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	4 PLC ± -		A3	00779	C-31888	
	ANGLES ± -	WEIGHT				
MATERIAL COPPER PER ASTM B-152 SLEEVE, RED VINYL	FINISH SEE	CUSTOMER DRAWING	SCALE	SHEET	REV	
			4:1	1 of 1	U1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[31888](#)