


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C3	REVISED PER ECR-16-011494	20JUN2017	NK	CX


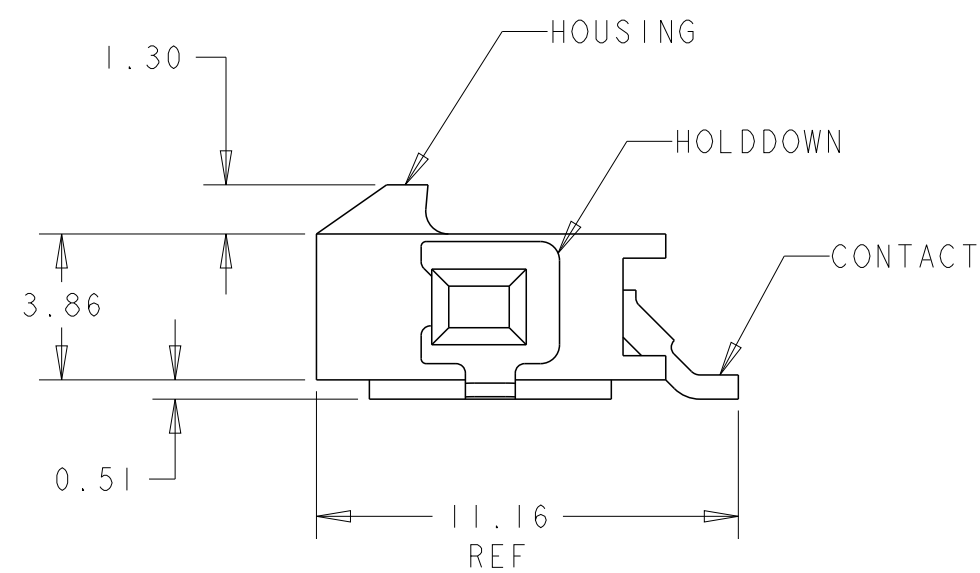


⚠ MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR BLACK.
HOLDDOWNS: - PHOSPHOR BRONZE.

2 PLATING: CONTACTS- 2.54μm MINIMUM TIN LEAD OVER 1.27μm MINIMUM NICKEL.
HOLDDOWNS- 2.54μm MINIMUM TIN-LEAD OVER 1.27μm MINIMUM NICKEL.

△ 4 RECOMMENDED PC BOARD THICKNESS OF 1.57.

5 PLATING: CONTACTS-2.54μm MINIMUM TIN OVER 1.27μm MINIMUM NICKEL.
HOLDDOWNS- 2.54μm MINIMUM TIN OVER 1.27μm MINIMUM NICKEL.

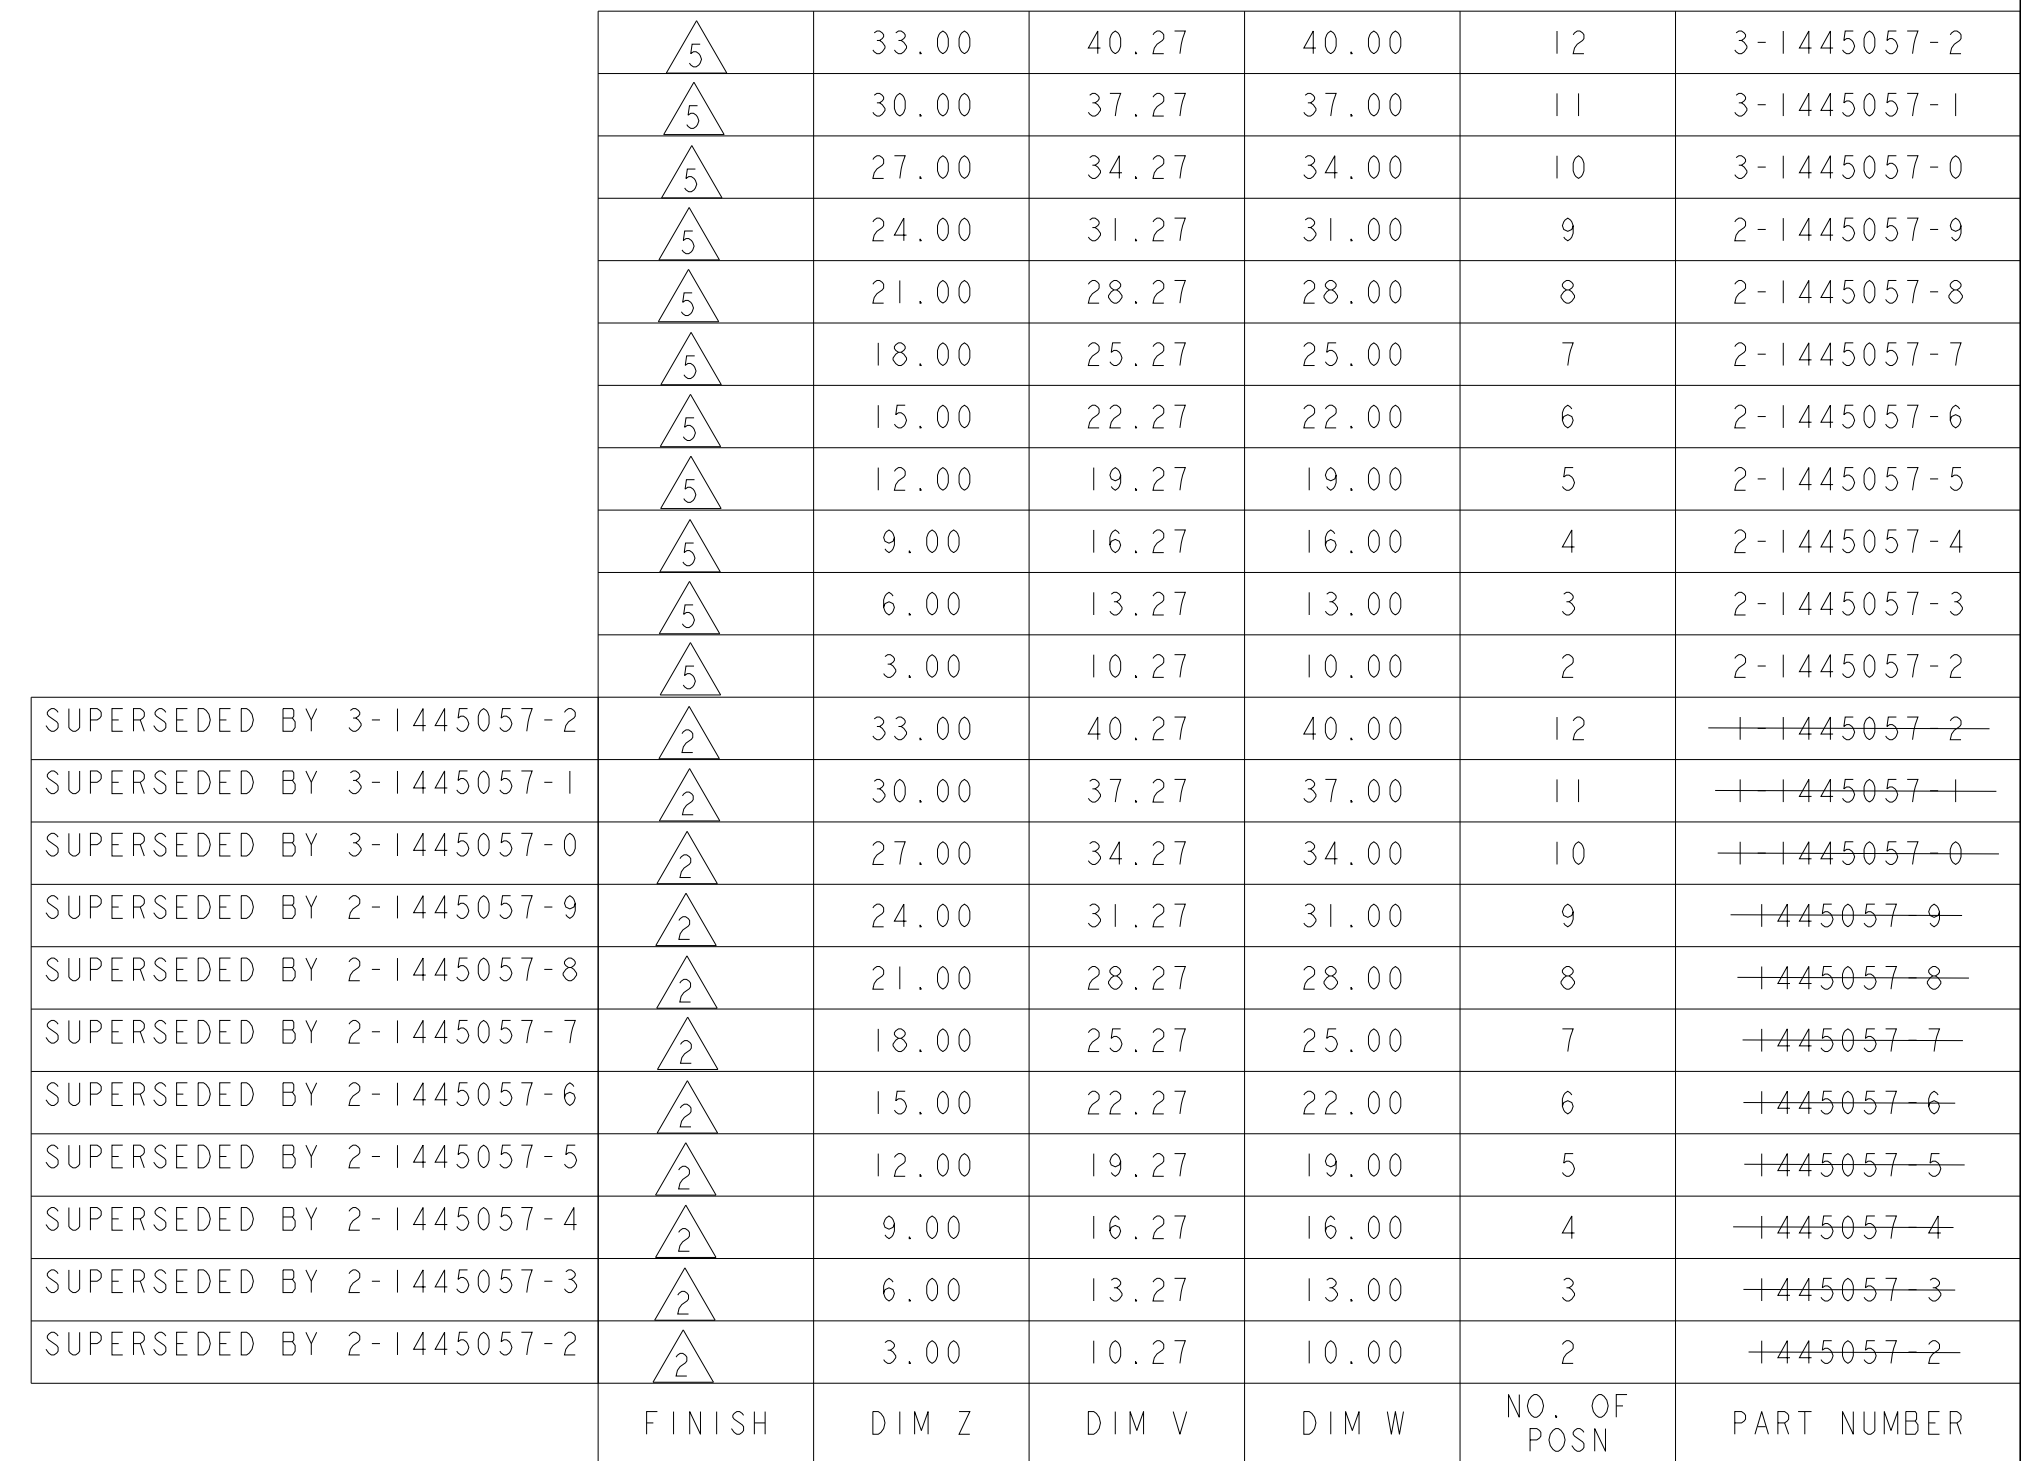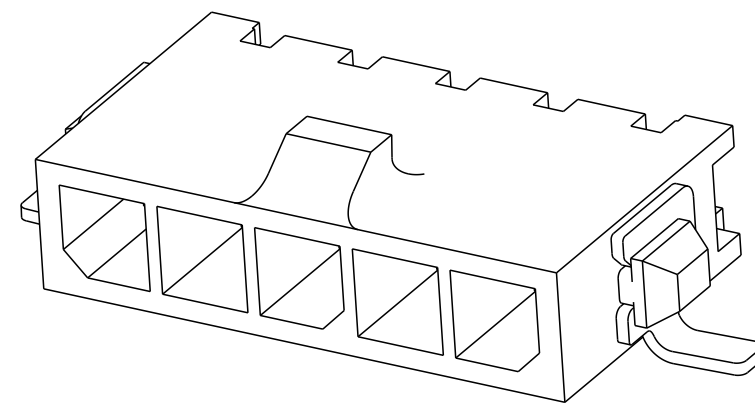

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ROOT 03-OCT-2000		 TE Connectivity	
DIMENSIONS:		CHG K. WHITAKER 13-MAR-2001		NAME RT ANGLE SURFACE MOUNT HEADER ASSY, TIN CONTACTS W/SURF MOUNT HOLDDOWNS, SINGLE ROW, MICRO MATE-N-LOK™	
mm		APVD K. WHITAKER 13-MAR-2001			
		PRODUCT SPEC 108-1836			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±0.13 3 PLC ±. 4 PLC ±. ANGLES ±.		APPLICATION SPEC 114-13000			
MATERIAL		WEIGHT -		SIZE A2	RESTRICTED TO -
 SEE TABLE		CUSTOMER DRAWING		SCALE 5:1	SHEET OF 1
				C=1445057	REV C3

PCB LAYOUT COMPONENT SIDE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1445057-1](#)