


UWT


Chip Type, Wide Temperature Range

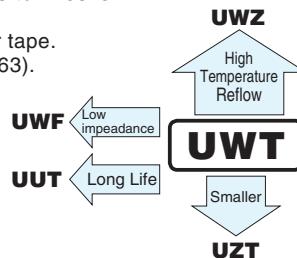



- Chip type operating over wide temperature range of to -55 to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.

**■ Specifications**

Item	Performance Characteristics																														
Category Temperature Range	-55 to +105°C																														
Rated Voltage Range	4 to 50V																														
Rated Capacitance Range	1 to 1500μF																														
Capacitance Tolerance	±20% at 120Hz, 20°C																														
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.																														
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C <table border="1"> <tr> <th>Rated voltage (V)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> <tr> <th>tan δ (MAX.)</th> <td>0.40</td> <td>0.30</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.14</td> </tr> </table>							Rated voltage (V)	4	6.3	10	16	25	35	50	tan δ (MAX.)	0.40	0.30	0.24	0.20	0.16	0.14	0.14								
Rated voltage (V)	4	6.3	10	16	25	35	50																								
tan δ (MAX.)	0.40	0.30	0.24	0.20	0.16	0.14	0.14																								
Stability at Low Temperature	Measurement frequency : 120Hz <table border="1"> <tr> <th>Rated voltage (V)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> <tr> <th>Impedance ratio Z-25°C / Z+20°C</th> <td>7</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <th>ZT / Z20 (MAX.)</th> <td>15</td> <td>8</td> <td>8</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table>							Rated voltage (V)	4	6.3	10	16	25	35	50	Impedance ratio Z-25°C / Z+20°C	7	4	3	2	2	2	2	ZT / Z20 (MAX.)	15	8	8	4	4	3	3
Rated voltage (V)	4	6.3	10	16	25	35	50																								
Impedance ratio Z-25°C / Z+20°C	7	4	3	2	2	2	2																								
ZT / Z20 (MAX.)	15	8	8	4	4	3	3																								
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C.			Capacitance change	Within ±25% of the initial capacitance value for capacitors of 16V or less. Within ±20% of the initial capacitance value for capacitors of 25V or more.																										
				tan δ	200% or less than the initial specified value																										
				Leakage current	Less than or equal to the initial specified value																										
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																														
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.			Capacitance change	Within ±10% of the initial capacitance value																										
				tan δ	Less than or equal to the initial specified value																										
Marking	Black print on the case top.																														

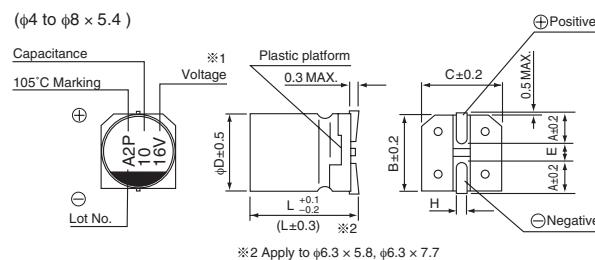■ Chip Type

Type numbering system (Example : 16V 10μF)

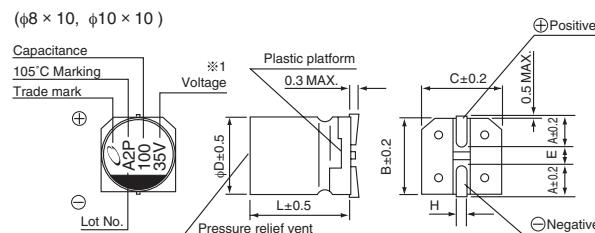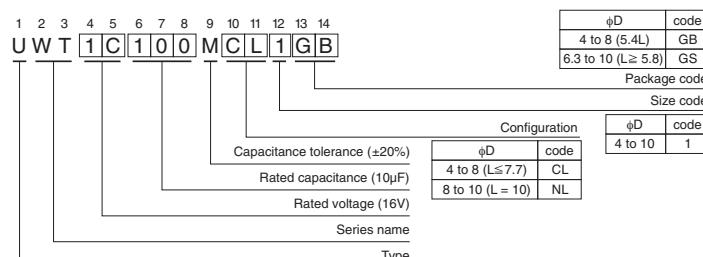

※1. Voltage mark for 6.3V is '6V'.

ØD × L	4 × 5.4	5 × 5.4	6.3 × 5.4	6.3 × 5.8	6.3 × 7.7	8 × 5.4	8 × 10	10 × 10	(mm)
A	1.8	2.1	2.4	2.4	2.4	3.3	2.9	3.2	
B	4.3	5.3	6.6	6.6	6.6	8.3	8.3	10.3	
C	4.3	5.3	6.6	6.6	6.6	8.3	8.3	10.3	
E	1.0	1.3	2.2	2.2	2.2	2.3	3.1	4.5	
L	5.4	5.4	5.4	5.8	7.7	5.4	10	10	
H	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1						

● Dimension table in next page.

UWT

■ Dimensions

Cap. (μF)	Code	V	4	6.3	10	16	25	35	50
		0G	0J	1A	1C	1E	1V	1H	
1	010								4 × 5.4 6.3
2.2	2R2								4 × 5.4 11
3.3	3R3								4 × 5.4 14
4.7	4R7						4 × 5.4 13	4 × 5.4 15	5 × 5.4 19
10	100				4 × 5.4 27	18	5 × 5.4 23	5 × 5.4 25	6.3 × 5.4 30
22	220	4 × 5.4 22	4 × 5.4 22	5 × 5.4 27	5 × 5.4 30	6.3 × 5.4 38	6.3 × 5.4 42	• 8 × 5.4 51(45)	• 8 × 5.4 51(45)
33	330	5 × 5.4 30	5 × 5.4 30	5 × 5.4 35	6.3 × 5.4 40	6.3 × 5.4 48	• 8 × 5.4 59(52)	6.3 × 7.7 60	
47	470	5 × 5.4 36	5 × 5.4 36	6.3 × 5.4 46	6.3 × 5.4 50	• 8 × 5.4 66(59)	6.3 × 5.8 63	6.3 × 7.7 63	
100	101	6.3 × 5.4 60	6.3 × 5.4 60	6.3 × 5.4 60	6.3 × 5.4 60	6.3 × 7.7 91	6.3 × 7.7 84	8 × 10 140	
150	151	6.3 × 5.8 86	6.3 × 5.8 86	6.3 × 5.8 86	6.3 × 7.7 95	8 × 10 140	8 × 10 155	10 × 10 180	
220	221	• 8 × 5.4 102(91)	• 8 × 5.4 102(91)	6.3 × 7.7 105	6.3 × 7.7 105	8 × 10 155	8 × 10 190	10 × 10 220	
330	331	6.3 × 7.7 105	6.3 × 7.7 105	8 × 10 195	8 × 10 195	8 × 10 190	10 × 10 300		
470	471	8 × 10 210	8 × 10 210	8 × 10 210	8 × 10 230	10 × 10 300			
680	681	8 × 10 210	8 × 10 210	10 × 10 310	10 × 10 310				
1000	102	8 × 10 230	8 × 10 230	10 × 10 310					Case size
1500	152	10 × 10 310	10 × 10 310						Rated ripple Φ D × L (mm)

Size φ6.3 × 5.8 is available for capacitors marked "•". In such a case, [6] will be put at 12th digit of type numbering system.

Rated ripple current (mA rms) at 105°C 120Hz

● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UUX(p.170), UUJ(p.176) series if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.