

## Series 14002

### Barrier Terminal Blocks

#### SPECIFICATIONS

**Rating:** 115A, 600V

**Poles:** 2-6 poles

**Wire Range:** #2-14 AWG CU / #2-8 AWG AL

**Torque Rating:** 40-50 in-lb.

**Operating Temperature:** 150°C

**Marking:** Marking strip optional, consult factory.


**Options:** CP = pressure plate, rated 60A, 600V

Q = quick-connect, rated 50A, 600V

To order options, enter letter code in front of Part No.: ie; CP14002-2

**Breakdown Voltage:**

**Agency Information:** UL/CSA; CE Certified

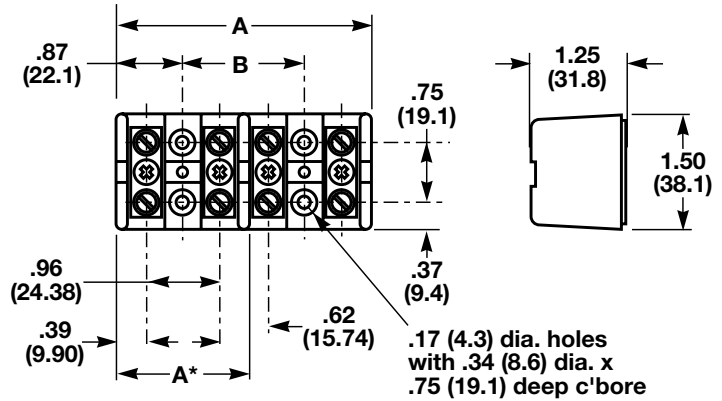

Part Number	A	B
14002-2	1.75	-
14002-3	2.37	-
14002-4	3.34	1.59
14002-5	3.96	2.21
14002-6	4.59	2.84

\* Dimensions in inches. To convert to millimeters, multiply by 25.4.

Note: "A" dimension for 14002-2 & 14002-3 only. (14002-2 & 14002-3 have only two mounting holes.)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Eaton:](#)

[14002-6](#)