


SIGN	DATE	DESCRIPTION	APPROVER
△	2012.10.03	USB 2.0 detail added	SHIN
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

- Material**
- Insulator: Glass Filled Polyester
 - Flammability: UL94V-0
 - Contacts: Phosphor Bronze
 - Contact Plating: See options
 - Shell: Brass
 - Shell Plating: 80 Ni over 40u" Cu

- Ratings**
- Current: 1A
 - Voltage: 30V AC(r.m.s.)
 - Contact Res: <30mΩ
 - Insulation Res: >1,000 MΩ
 - Operating Temp: 0° - +85°
 - Storage Temp: -40° - +60°

RoHS Compliant

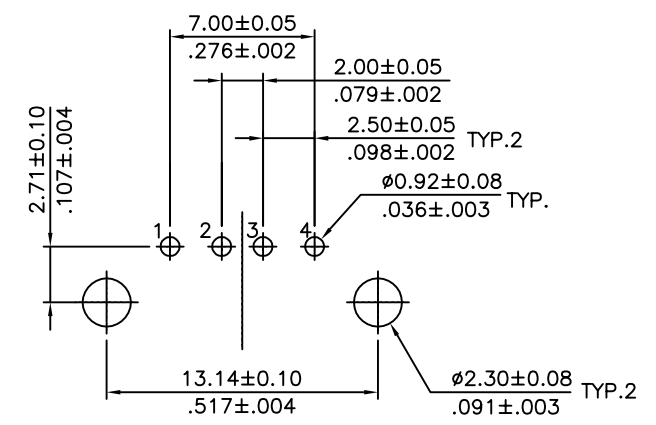

Recommended P.C. Board Layout

PART NUMBER:

USB-A1HSXX

- COLOR:**
 B: Black
 W: White
- PLATING:** △
 6: Selective Au Flash/50u" Ni
 8: Selective 30u" Au/50u" Ni (USB 2.0)

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		USB - A type, Horizontal, thru hole	
PART NO.	USB-A1HSXX	DWG NO.	USB-A1HSXX.DWG
APPROVED	CHECKED	DESIGNED	DRAWN
	Marvin 2002.03.12	Marvin 2002.03.12	Marvin 2002.03.12
		4050	
		Tolerance	
		X. [*] ±1°	
		X.X ±0.30/.012	
		X.XX ±0.20/.008	
		X.XXX ±0.10/.004	
		UNIT: mm/inches	
		SCALE: NONE	
		REV.: A	
		SHEET: 01/01	