


1 2 3 4 5 6 7

A

A

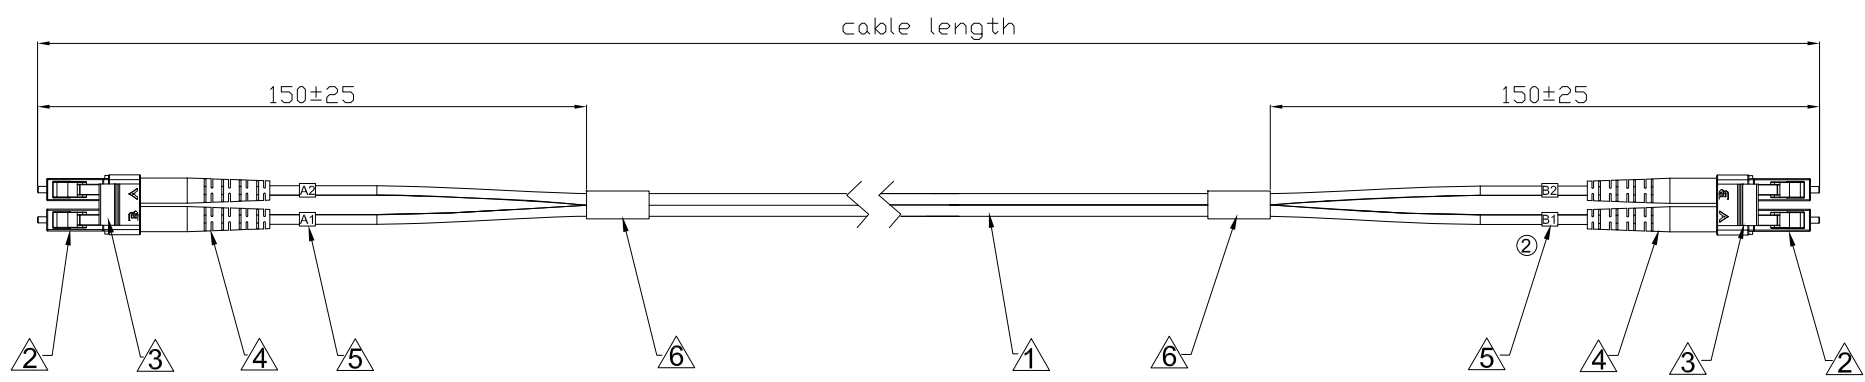

B

B

C

C

D

D

Performance:
 a. Insertion Loss: <0.3dB
 b. Return Loss: >20dB
 c. Fiber Extension: -100nm,H,+100nm
 d. Ferrule End-Face Radius: 7<R<25mm
 e. Aper Offset: ≤50um
 f. Increase in insertion Loss after 500 mating: 0.2 dB max
 g. Operation Temperature: -40°C to +70°C
 h. Storage Temperature: -40°C to +85°C
 i. The bend radius must respect a minimum of 30mm
 ① j. Mating cycle: 500times

WSW order code: DK-2633-xx

Cable length:
 01: 1000+50/-0 07: 7000+100/-0
 02: 2000+100/-0 10: 10000+100/-0
 03: 3000+100/-0 15: 15000+150/-0
 05: 5000+100/-0

E

E

F

F

No.	Specifications	Qty.
①	Ø3.0mm 2F, MM62.5/125 Duplex cable/ LSZH/ Orange	1
②	3.0mm LC/PC MM Connector/Beige	4
③	LC Duplex Clip/Beige	2
④	LC 3.0mm Boot/Beige	4
⑤	Tail Identification Marker (3mm C-Clip)/NO.A2.A1;B2;B1	4
⑥	LC Heatshrink Tube/Black	2

RoHS compliant
 Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE					Drawn	22.06.2016	Amy	ASSMANN WSW-No. DK-2633-xx
		③	Update the cable description	11.12.2018	Segal	Approved	11.12.2018	
		②	Update	09.02.2018	Tom			
DIM	TOL	①	Change the specification	22.01.2018	Tom			Drawing-No. ASS 7672 CA
		④	Drawn	22.06.2016	Amy			rev03
Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet	

G

G

H

H

1 2 3 4 5 6 7