


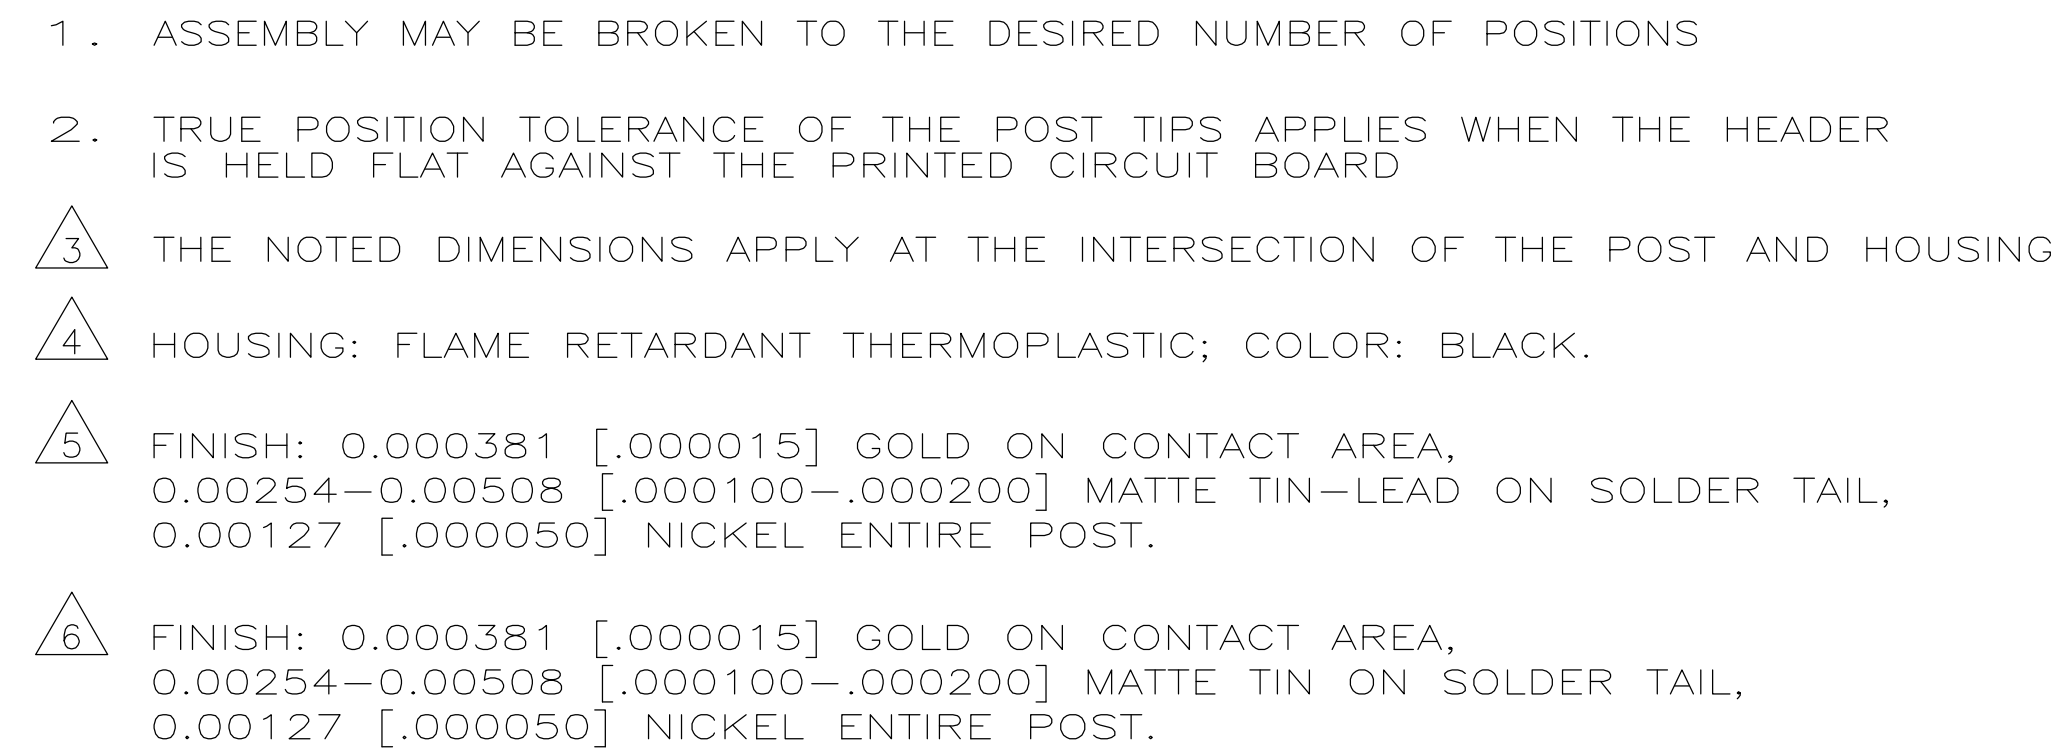

4805 (3/11)

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOCAD

DIST00

REV

DATE

BY

APPROVED

DESCRIPTION

SEE SHEET 1

△ ₆	101.19 [3.984]	99.06 [3.900]	39	80	9-146509-0
△ ₆	98.65 [3.884]	96.52 [3.800]	38	78	8-146509-9
△ ₆	96.11 [3.784]	93.98 [3.700]	37	76	8-146509-8
△ ₆	93.57 [3.684]	91.44 [3.600]	36	74	8-146509-7
△ ₆	91.03 [3.584]	88.90 [3.500]	35	72	8-146509-6
△ ₆	88.49 [3.484]	86.36 [3.400]	34	70	8-146509-5
△ ₆	85.95 [3.384]	83.82 [3.300]	33	68	8-146509-4
△ ₆	83.41 [3.284]	81.28 [3.200]	32	66	8-146509-3
△ ₆	80.87 [3.184]	78.74 [3.100]	31	64	8-146509-2
△ ₆	78.33 [3.084]	76.20 [3.000]	30	62	8-146509-1
△ ₆	75.79 [2.984]	73.66 [2.900]	29	60	8-146509-0
△ ₆	73.25 [2.884]	71.12 [2.800]	28	58	7-146509-9
△ ₆	70.71 [2.784]	68.58 [2.700]	27	56	7-146509-8
△ ₆	68.17 [2.684]	66.04 [2.600]	26	54	7-146509-7
△ ₆	65.63 [2.584]	63.50 [2.500]	25	52	7-146509-6
△ ₆	63.09 [2.484]	60.96 [2.400]	24	50	7-146509-5
△ ₆	60.55 [2.384]	58.42 [2.300]	23	48	7-146509-4
△ ₆	58.01 [2.284]	55.88 [2.200]	22	46	7-146509-3
△ ₆	55.47 [2.184]	53.34 [2.100]	21	44	7-146509-2
△ ₆	52.93 [2.084]	50.80 [2.000]	20	42	7-146509-1
△ ₆	50.39 [1.984]	48.26 [1.900]	19	40	7-146509-0
△ ₆	47.85 [1.884]	45.72 [1.800]	18	38	6-146509-9
△ ₆	45.31 [1.784]	43.18 [1.700]	17	36	6-146509-8
△ ₆	42.77 [1.684]	40.64 [1.600]	16	34	6-146509-7
△ ₆	40.23 [1.584]	38.10 [1.500]	15	32	6-146509-6
△ ₆	37.69 [1.484]	35.56 [1.400]	14	30	6-146509-5
△ ₆	35.15 [1.384]	33.02 [1.300]	13	28	6-146509-4
△ ₆	32.61 [1.284]	30.48 [1.200]	12	26	6-146509-3
△ ₆	30.07 [1.184]	27.94 [1.100]	11	24	6-146509-2
△ ₆	27.53 [1.084]	25.40 [1.000]	10	22	6-146509-1
△ ₆	24.99 [.984]	22.86 [.900]	9	20	6-146509-0
△ ₆	22.45 [.884]	20.32 [.800]	8	18	5-146509-9
△ ₆	19.91 [.784]	17.78 [.700]	7	16	5-146509-8
△ ₆	17.37 [.684]	15.24 [.600]	6	14	5-146509-7
△ ₆	14.83 [.584]	12.70 [.500]	5	12	5-146509-6
△ ₆	12.29 [.484]	10.16 [.400]	4	10	5-146509-5
△ ₆	9.75 [.384]	7.62 [.300]	3	8	5-146509-4
△ ₆	7.21 [.284]	5.08 [.200]	2	6	5-146509-3
△ ₆	4.67 [.184]	2.54 [.100]	1	4	5-146509-2
△ ₆	2.13 [.084]	-	-	2	5-146509-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

△ ₅	101.19 [3.984]	99.06 [3.900]	39	80	4-146509-0
△ ₅	98.65 [3.884]	96.52 [3.800]	38	78	3-146509-9
△ ₅	96.11 [3.784]	93.98 [3.700]	37	76	3-146509-8
△ ₅	93.57 [3.684]	91.44 [3.600]	36	74	3-146509-7
△ ₅	91.03 [3.584]	88.90 [3.500]	35	72	3-146509-6
△ ₅	88.49 [3.484]	86.36 [3.400]	34	70	3-146509-5
△ ₅	85.95 [3.384]	83.82 [3.300]	33	68	3-146509-4
△ ₅	83.41 [3.284]	81.28 [3.200]	32	66	3-146509-3
△ ₅	80.87 [3.184]	78.74 [3.100]	31	64	3-146509-2
△ ₅	78.33 [3.084]	76.20 [3.000]	30	62	3-146509-1
△ ₅	75.79 [2.984]	73.66 [2.900]	29	60	3-146509-0
△ ₅	73.25 [2.884]	71.12 [2.800]	28	58	2-146509-9
△ ₅	70.71 [2.784]	68.58 [2.700]	27	56	2-146509-8
△ ₅	68.17 [2.684]	66.04 [2.600]	26	54	2-146509-7
△ ₅	65.63 [2.584]	63.50 [2.500]	25	52	2-146509-6
△ ₅	63.09 [2.484]	60.96 [2.400]	24	50	2-146509-5
△ ₅	60.55 [2.384]	58.42 [2.300]	23	48	2-146509-4
△ ₅	58.01 [2.284]	55.88 [2.200]	22	46	2-146509-3
△ ₅	55.47 [2.184]	53.34 [2.100]	21	44	2-146509-2
△ ₅	52.93 [2.084]	50.80 [2.000]	20	42	2-146509-1
△ ₅	50.39 [1.984]	48.26 [1.900]	19	40	2-146509-0
△ ₅	47.85 [1.884]	45.72 [1.800]	18	38	1-146509-9
△ ₅	45.31 [1.784]	43.18 [1.700]	17	36	1-146509-8
△ ₅	42.77 [1.684]	40.64 [1.600]	16	34	1-146509-7
△ ₅	40.23 [1.584]	38.10 [1.500]	15	32	1-146509-6
△ ₅	37.69 [1.484]	35.56 [1.400]	14	30	1-146509-5
△ ₅	35.15 [1.384]	33.02 [1.300]	13	28	1-146509-4
△ ₅	32.61 [1.284]	30.48 [1.200]	12	26	1-146509-3
△ ₅	30.07 [1.184]	27.94 [1.100]	11	24	1-146509-2
△ ₅	27.53 [1.084]	25.40 [1.000]	10	22	1-146509-1
△ ₅	24.99 [.984]	22.86 [.900]	9	20	1-146509-0
△ ₅	22.45 [.884]	20.32 [.800]	8	18	146509-9
△ ₅	19.91 [.784]	17.78 [.700]	7	16	146509-8
△ ₅	17.37 [.684]	15.24 [.600]	6	14	146509-7
△ ₅	14.83 [.584]	12.70 [.500]	5	12	146509-6
△ ₅	12.29 [.484]	10.16 [.400]	4	10	146509-5
△ ₅	9.75 [.384]	7.62 [.300]	3	8	146509-4
△ ₅	7.21 [.284]	5.08 [.200]	2	6	146509-3
△ ₅	4.67 [.184]	2.54 [.100]	1	4	146509-2
△ ₅	2.13 [.084]	-	-	2	146509-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

0

1

2

3

4

PLC

PLC

PLC

PLC

PLC

±

±

±

±

±

-

0.5[.02]

0.13[.005]

-

±

ANGLES

FINISH

SEE TABLE

DWN
R BROWN
19OCT2006

CHK
J GESFORD
19OCT2006

APVD
J GESFORD
19OCT2006

TE Connectivity

NAME

HEADER ASSEMBLY, MOD II,
STACKING, DOUBLE ROW,
.025 SQ.POST, UNSHROUDED

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

A1

00779

146509

SCALE 4:1

SHEET 2 OF 2

REV A1

4805 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-146509-7](#)