

NX3225GD

For Automotive

■ Features

A small surface-mount type crystal unit, ideal for an engine control CPU clock; delivering the high reliability that is particularly demanded by automotive.

Compatible with low frequency range starting from 7.98 MHz.

- Compact and thin. (3.2x2.5mm typ., t1.0mm max.)
- High resistance to solder cracking.
- Stable start-up characteristics even under extremely severe environmental conditions.
- Excellent environment-resistant performance, including heat, vibration and shock resistance.
- Meets the requirements for re-flow profiling using lead-free solder.
- Conforms to AEC-Q200.




RoHS Compliant
Directive 2011/65/EU

■ Specifications

Item	Model	NX3225GD
Nominal Frequency		7.98 to 12 MHz
Overtone Order		Fundamental
Frequency Tolerance (25 ±3 °C)		±50 × 10 ⁻⁶
Frequency versus Temperature Characteristics (with reference to +25 °C)		±150 × 10 ⁻⁶
Operating Temperature Range		-40 to +150 °C
Storage Temperature Range		-40 to +150 °C
Equivalent Series Resistance		Refer to *1
Level of Drive		10 μW (Max. 200 μW)
Load Capacitance		8 pF
Specifications Number		STD-CRA-3

■ Dimensions

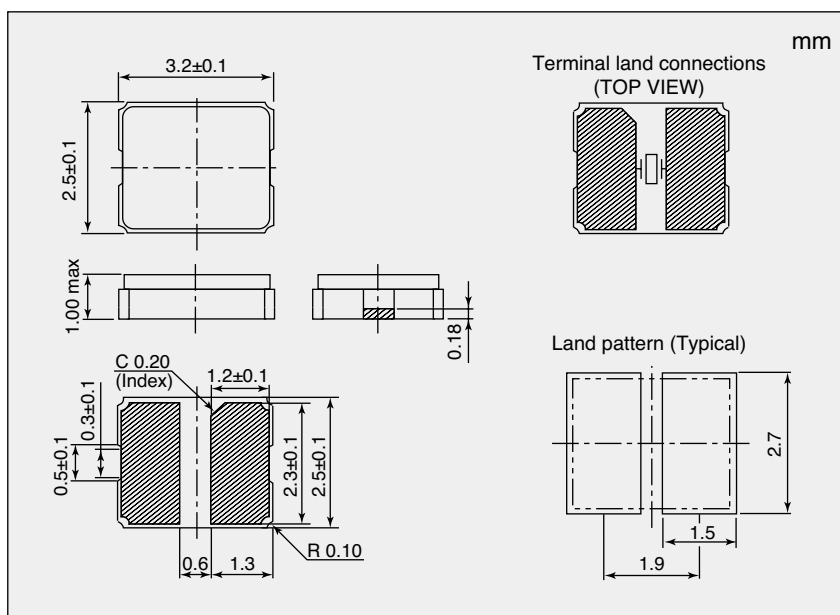

*1 Equivalent Series Resistance

Nominal frequency (MHz)	Equivalent Series Resistance max. [Ω]
7.98 to 9.8	500
9.8 to 12	300

Please specify the model name, frequency, and specification number when you order products. For further questions regarding specifications, please feel free to contact us.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NDK:](#)

[NX3225GD-8MHZ-STD-CRA-3](#) [NX3225GD-10.000M-STD-CRA-3](#)