

REMARKS/Bemerkungen

- 1

CAVITY SUITABLE FOR STANDARD TIMER CONTACTS LISTED IN PROD.SPEC. 108-18049, ITEM 3.3.2
Kammer geeignet für Standard Timer Kontakte gelistet in Prod. Spec. 108-18049, Punkt 3.3.2
- 2

CONTACT CAVITY NO.
Kontaktkammernummerierung
- 3

MATING STOP
Tiefenanschlag
- 4

AREA FOR TE LOGO ACC. TO SPEC 202-36
Bereich für TE Logo nach Spec. 202-36
- 5

POLARIZATION RIB POSITION "a" AND/OR "b"
Polarisierungsrippe Position "a" und/oder "b"
- 6

KEYING RIB POSITION "c" AND/OR "d"
Kodierrippe Position "c" und/oder "d"
- 6a

KEYING RIB POSITION "c" AND/OR "d" AT THE END WALLS OF THE HOUSING
Kodierrippe Position "c" und/oder "d" an den Gehäusestirnseiten
- 7

LOCKING LATCH
Rasthaken
- 8

TE PART NO (PN)
TE Bestell Nr. (PN)
- 9

DESIGN OF THE HOUSINGS ACC. TO RAST 5 STANDARD
Gehäuseausführung gemäss RAST 5 Vorgabe
- 10

GENERAL SUITABLE TAB HEADER SEE RAST 5 PERFORMANCE
Generell passende Flachsteckerwannen siehe RAST 5 Vorgabe
- 11





PACKAGING: BULK PACKAGING IN CORRUGATED BOX PN 740580-2
2 POS. 2500 PIECES PER BOX / 3 POS. 2000 PIECES PER BOX
Verpackung: Schüttgut in Versandkarton Pn 740580-2
2pol. 2500 Stück per Karton / 3pol. 2000 Stück per Karton
- 12

DIMENSION A, B C AND D SEE SHEET 2 OF 3
- 13


MATERIAL CORRESPONDS TO THE REQUIRMENT EN 60335
(INCL. GLOW WIRE TEST 750° WITHOUT FLAME)
Material entspricht den Anforderungen der EN 60335
(inkl. Glühdrahttest 750° ohne Flamme)
- 14

RATIO NUMBER OF THE KEYING VERSION,INKJET PRINTED. SEE SHEET 2
Kodierungskennnummer, mit Tintenstrahldrucker aufgebracht . siehe Blatt 2
- 15

PRELIMINARY- NOT RELEASED FOR PRODUCTION

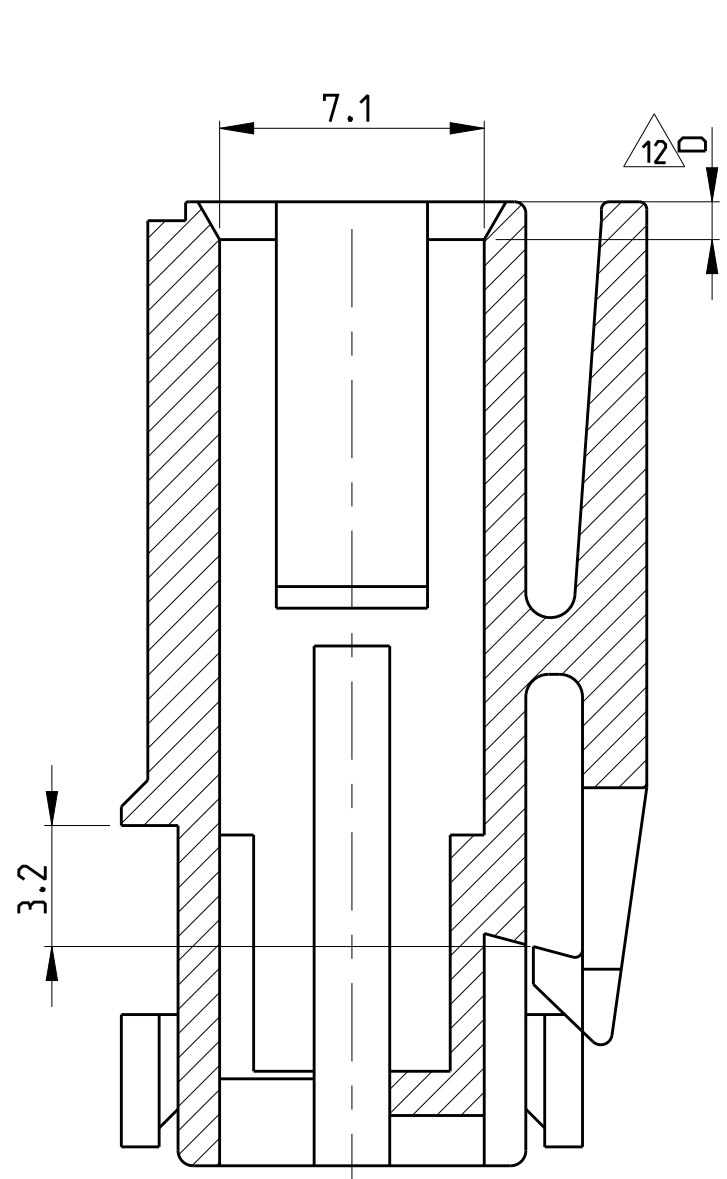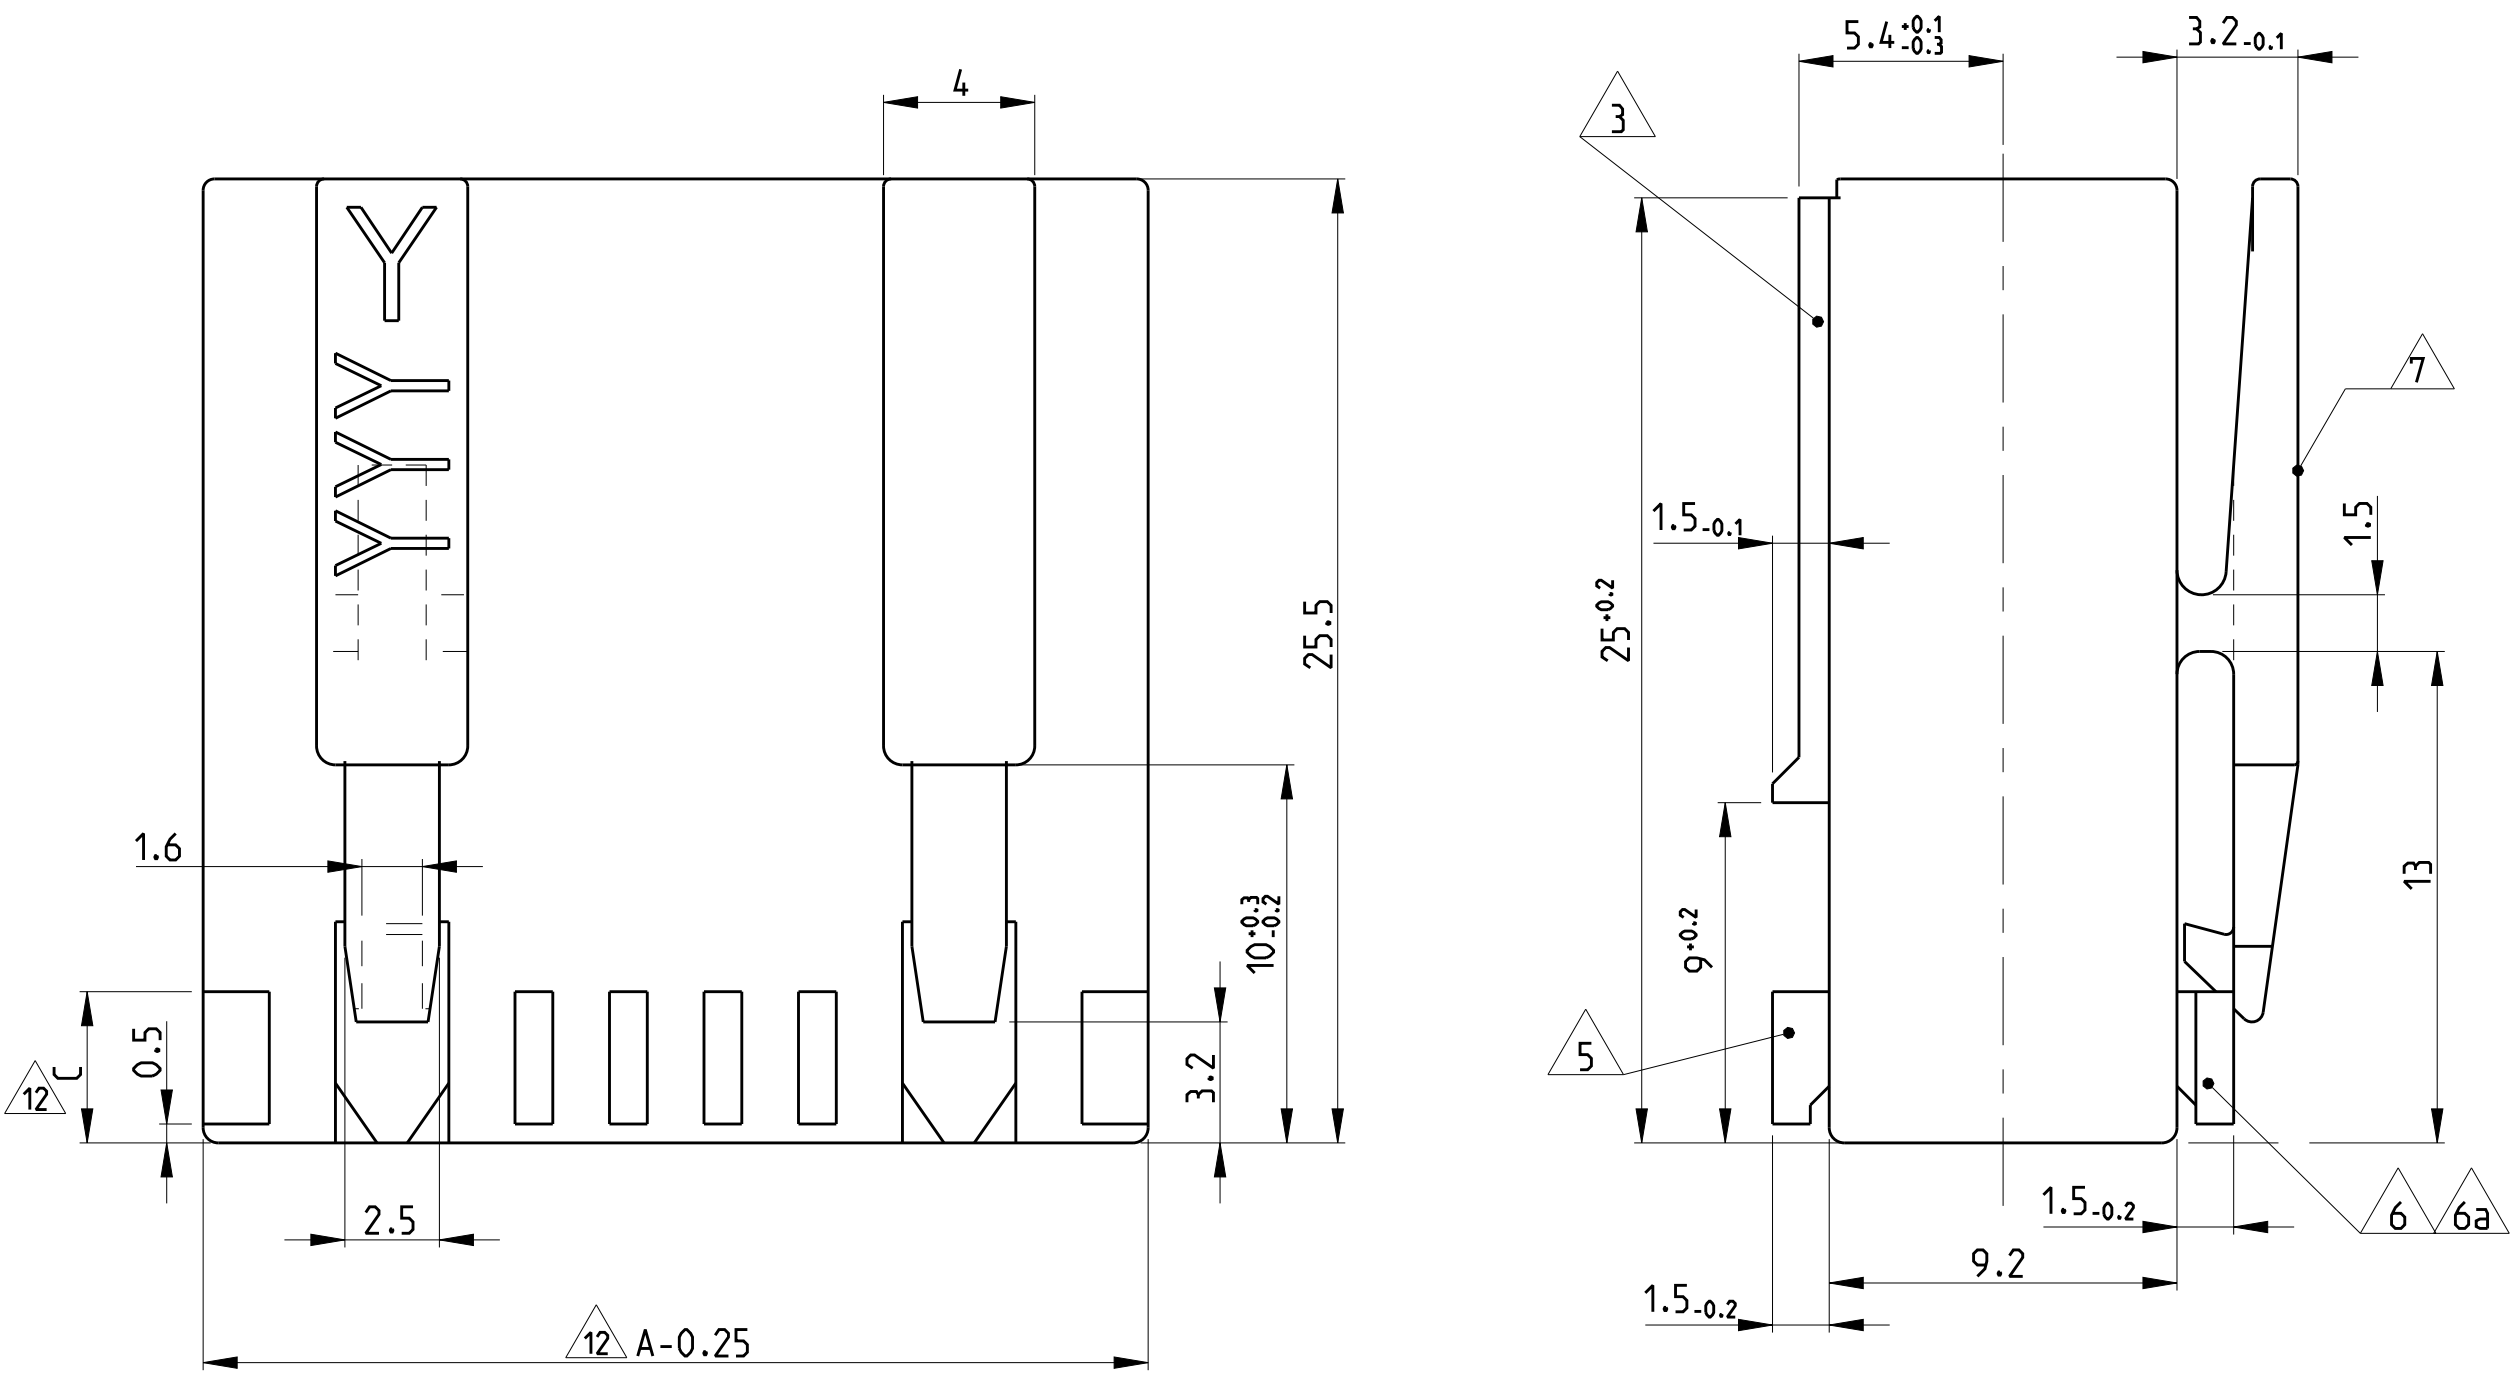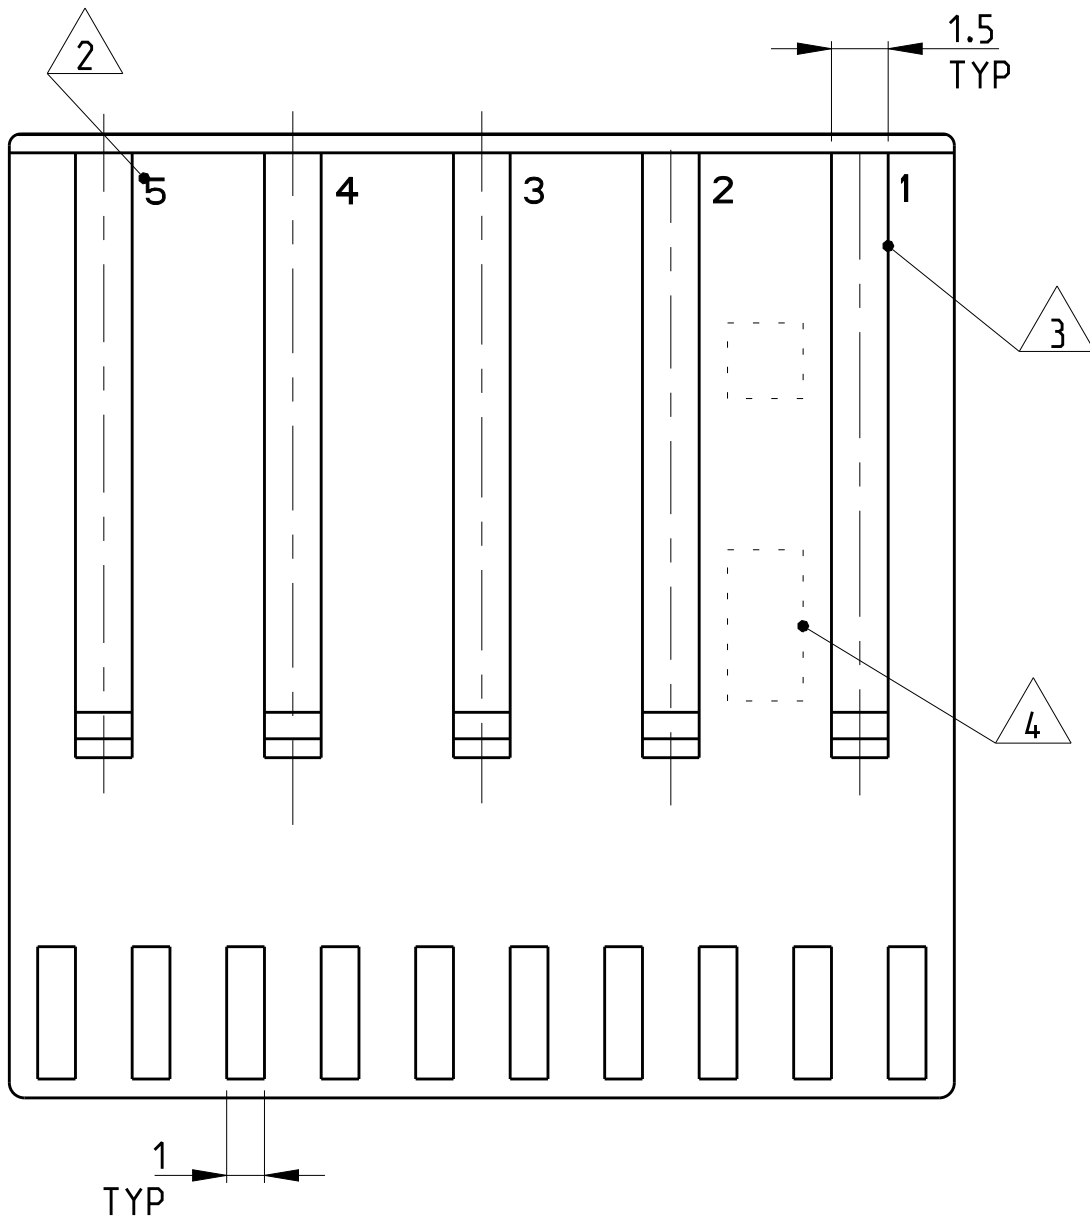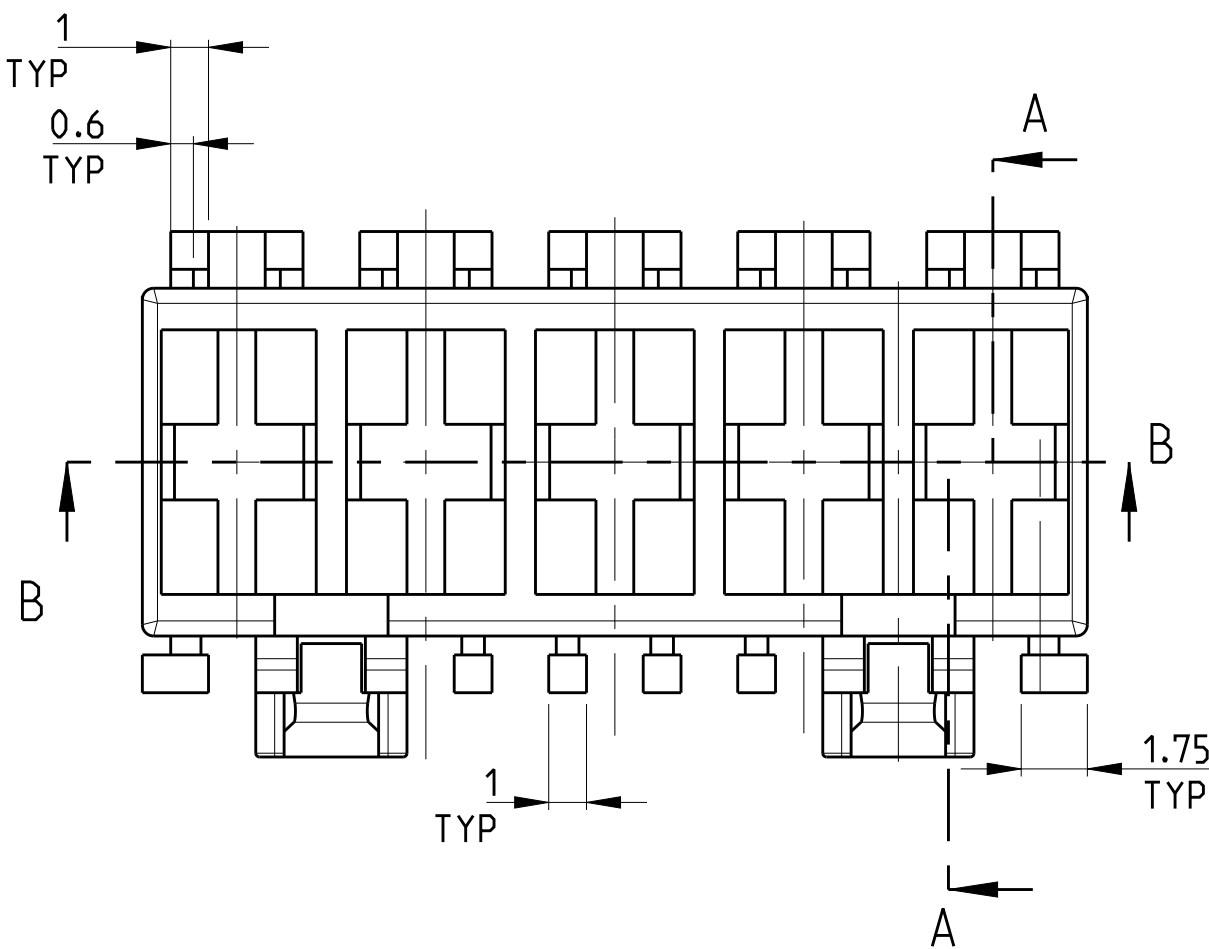


SECTION A-A / Schnitt A-A

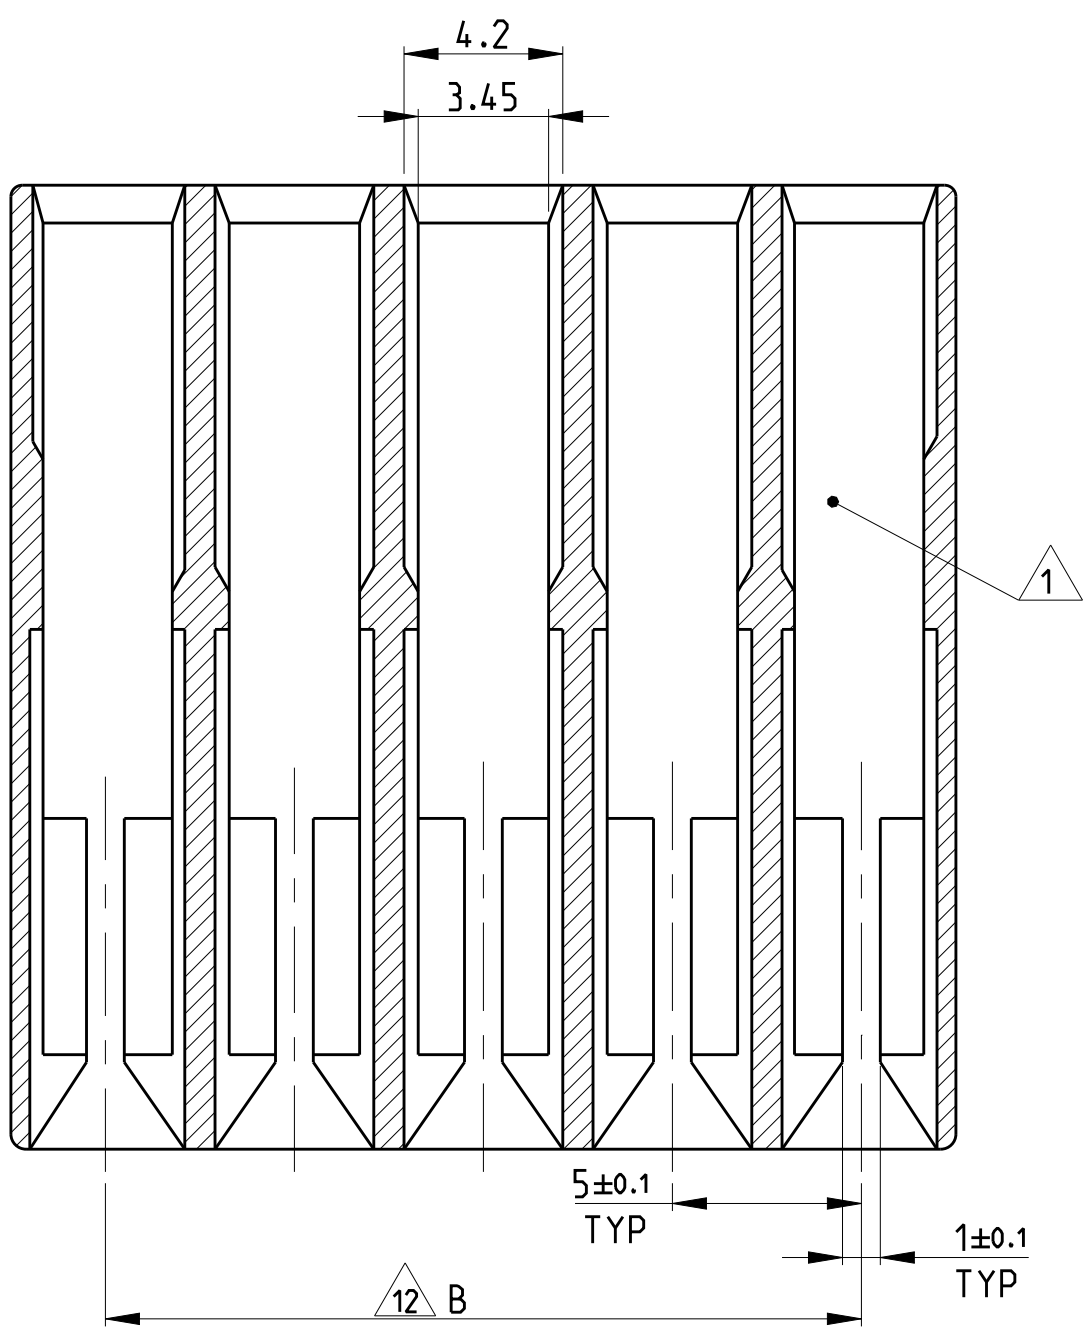

SECTION B-B / Schnitt B-B


5 POSITION
STD. TIMER MARK-II HOUSING

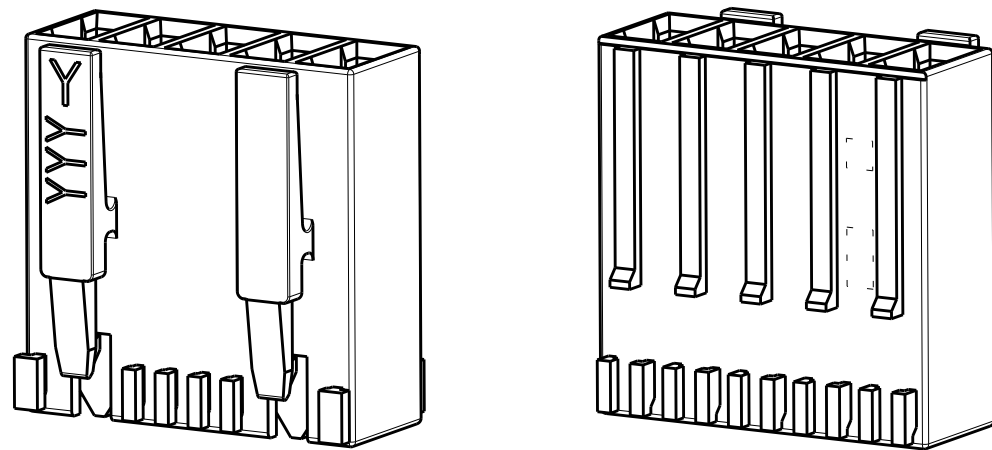

SCALE 2:1


THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN Kishor M	18-10-07	 TE Connectivity	
DIMENSIONS: mm		CHK K.Munz	18-10-07		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD T.Klenner	18-10-07	NAME STANDARD TIMER HSG. RAST 5 MARK II Standard Timer Gehäuse RAST 5 Mark II	
0 PLC ±0.2		PRODUCT SPEC		SIZE	
1 PLC ±0.2		108-18049		CAGE CODE	
2 PLC ±0.2		APPLICATION SPEC		DRAWING NO	
3 PLC ±-		-		RESTRICTED TO	
4 PLC ±-		-		A 1	
ANGLES FINISH		WEIGHT		00779	
-		-		C=1241961	
-		Customer Drawing		SCALE	
SHEET 2 OF 3		5:1		SHEET 1 OF 3	
4805 (3/11)		REV C 41			

ONLY 5-1241961-7, 1-1241961-9, 7-1241961-7, 2345753-1

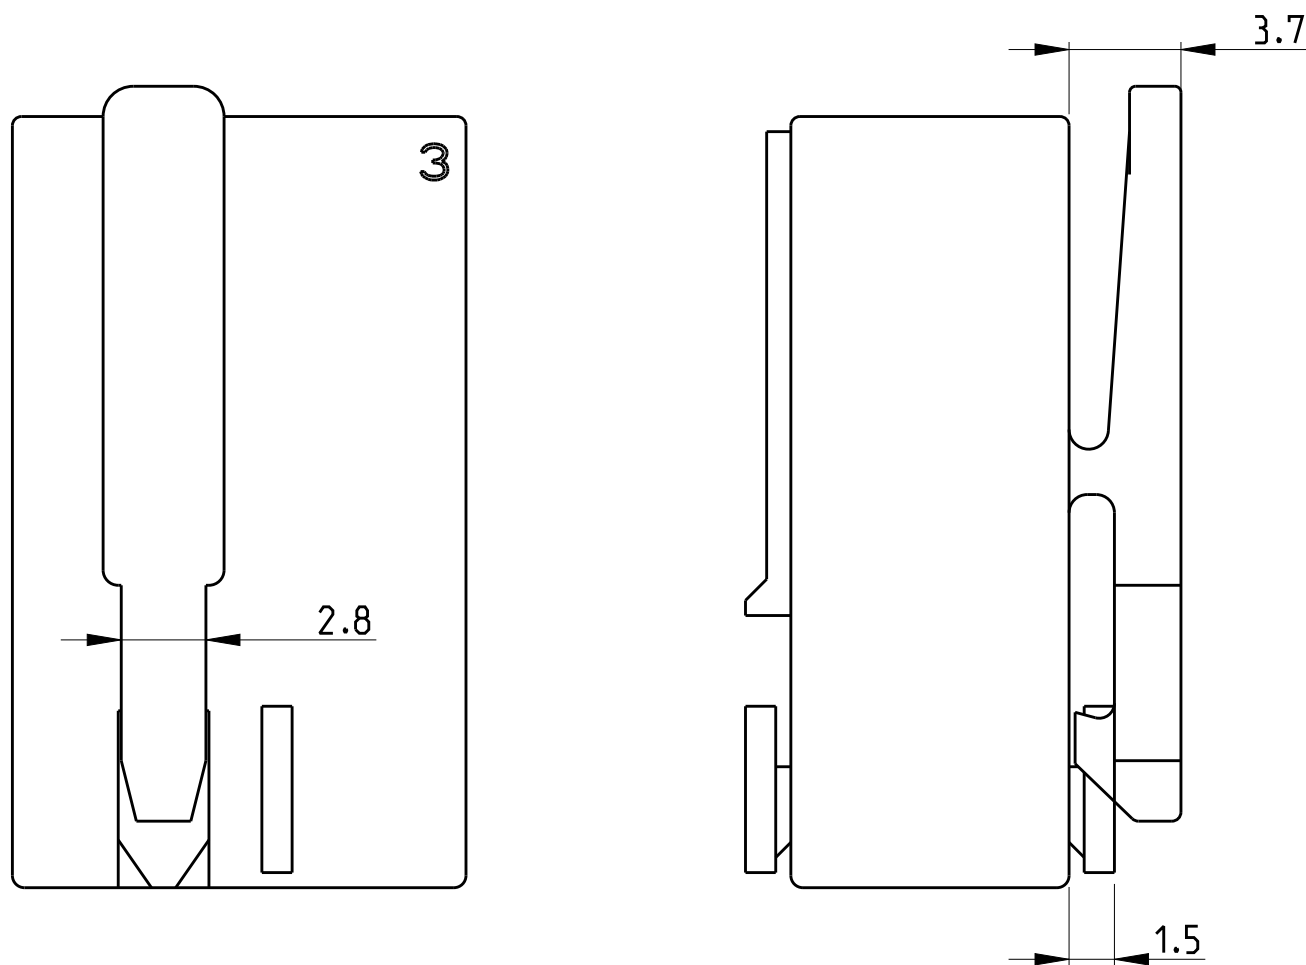

ALL OTHER DIMENSIONS SEE SHEET 1 OF 3

KEY LAYOUT DESCRIPTION

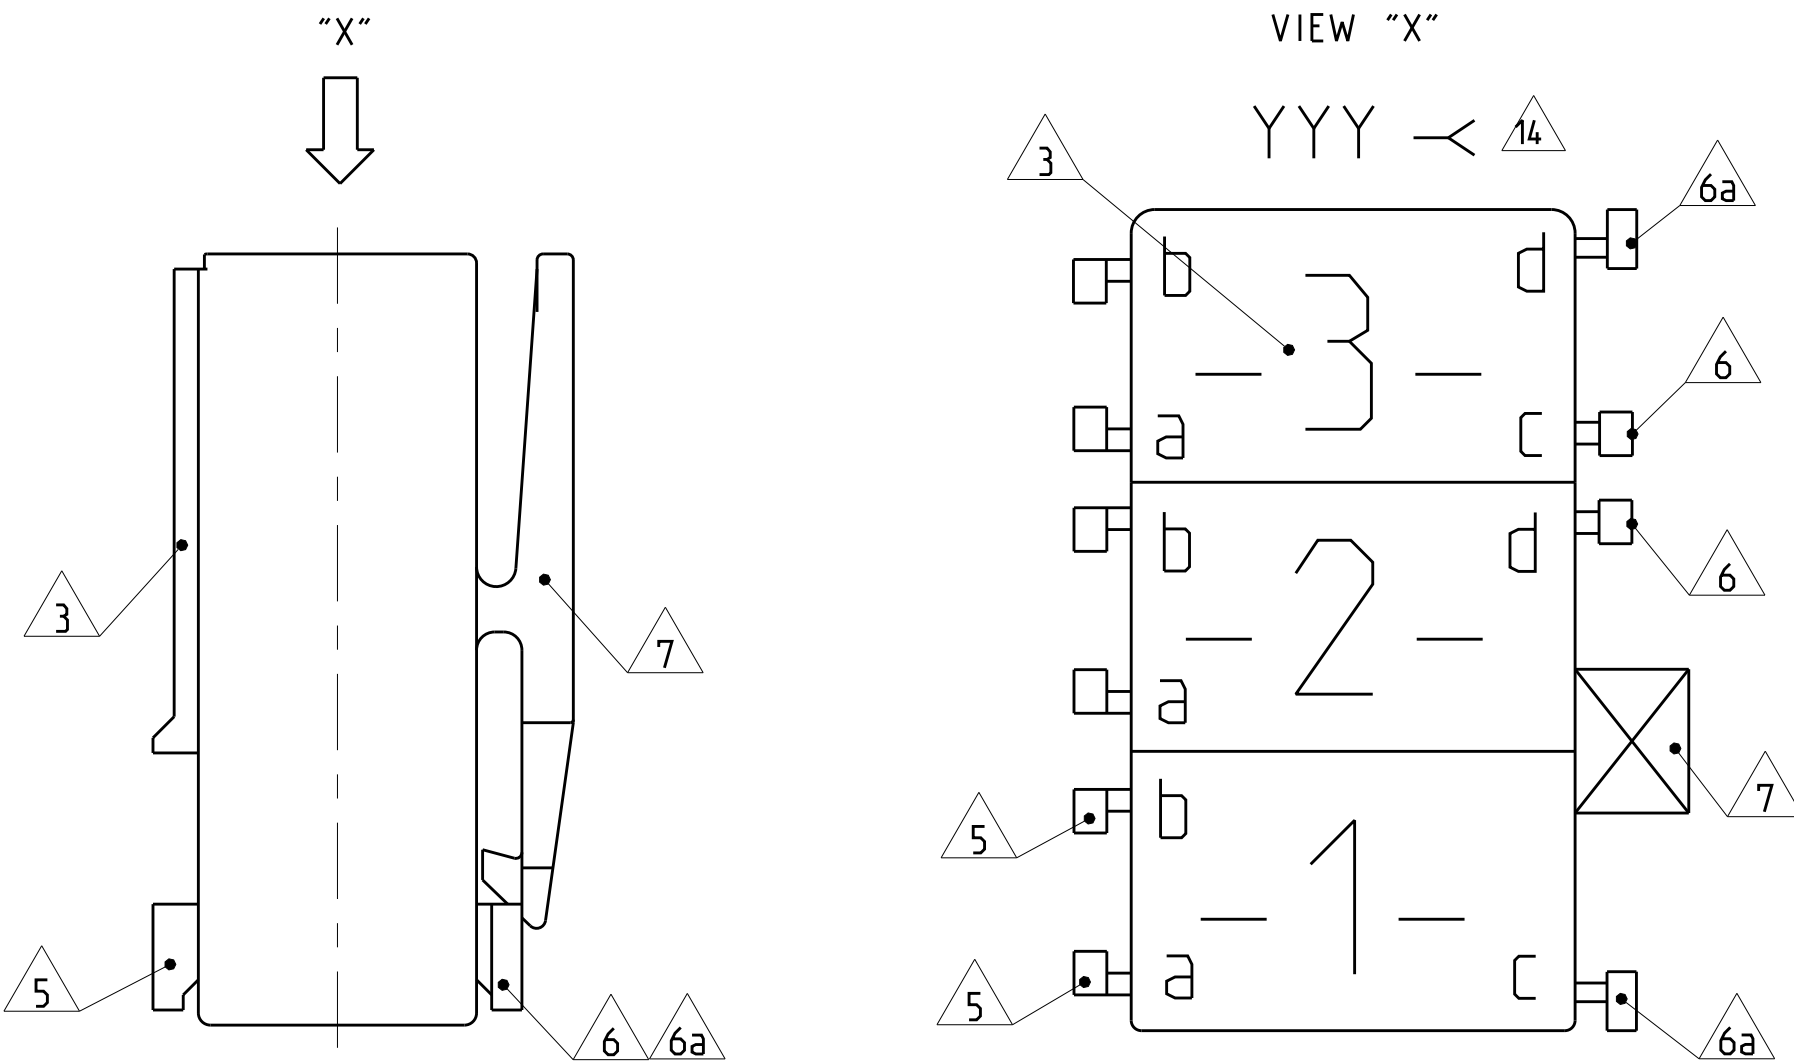

X-XXXXXX-X

SPECIAL VERSION: UL94 VO & GWT 750 NF & CTI 350								
5-1241961-7	3	6	1	15	10	PA66	NATURAL	A
1-1241961-9	3			15	10		NATURAL	A
7-1241961-7	3			15	10		NATURAL	A

SPECIAL VERSION: UL94 VO & GWT 750 NF								
2322164-1	4	4	0.5	20	15	PA66	NATURAL	1


SPECIAL VERSION: UL94 V2 & GWT 750 NF								
6-2178575-7	3	4	0.5	15	10	PA6 GF15	NATURAL	A

SPECIAL VERSION: UL94 VO & GWT 750 NF								
3-2178412-7	3	6	1	15	10	PA66 UL94 VO & GWT 750 NF	NATURAL	1
4-2178412-7	3			15	10		NATURAL	1
8-2178412-2	2			10	5		NATURAL	1

UL94 VO & GWT 750 NF								
2322917-4	4	4	0.5	20	15	PA66 UL94 VO & GWT 750 NF	NATURAL	C
2322917-2	2			10	5		NATURAL	1
2315717-1	2			10	5		NATURAL	C
2315717-2	2	4	0.5	10	5		NATURAL	C
2315717-3	2			10	5		NATURAL	C
2315717-4	4			20	15		NATURAL	C
2315717-5	4			20	15		NATURAL	C
2315717-6	3			15	10		NATURAL	C
2315717-7	3			15	10		NATURAL	C
PART NO.	POS.	DIM C	DIM D	DIM A	DIM B	MATERIAL	COLOUR	REV.

PAY ATTENTION !
DIFFERENT CAVITY GEOMETRY AND LOCKING LATCHE OVERHANG
Bitte beachten !
Unterschiedliche Kammergeometrie und Rasthakenuberstand.

FOR 2 POS. AND 3 POS.

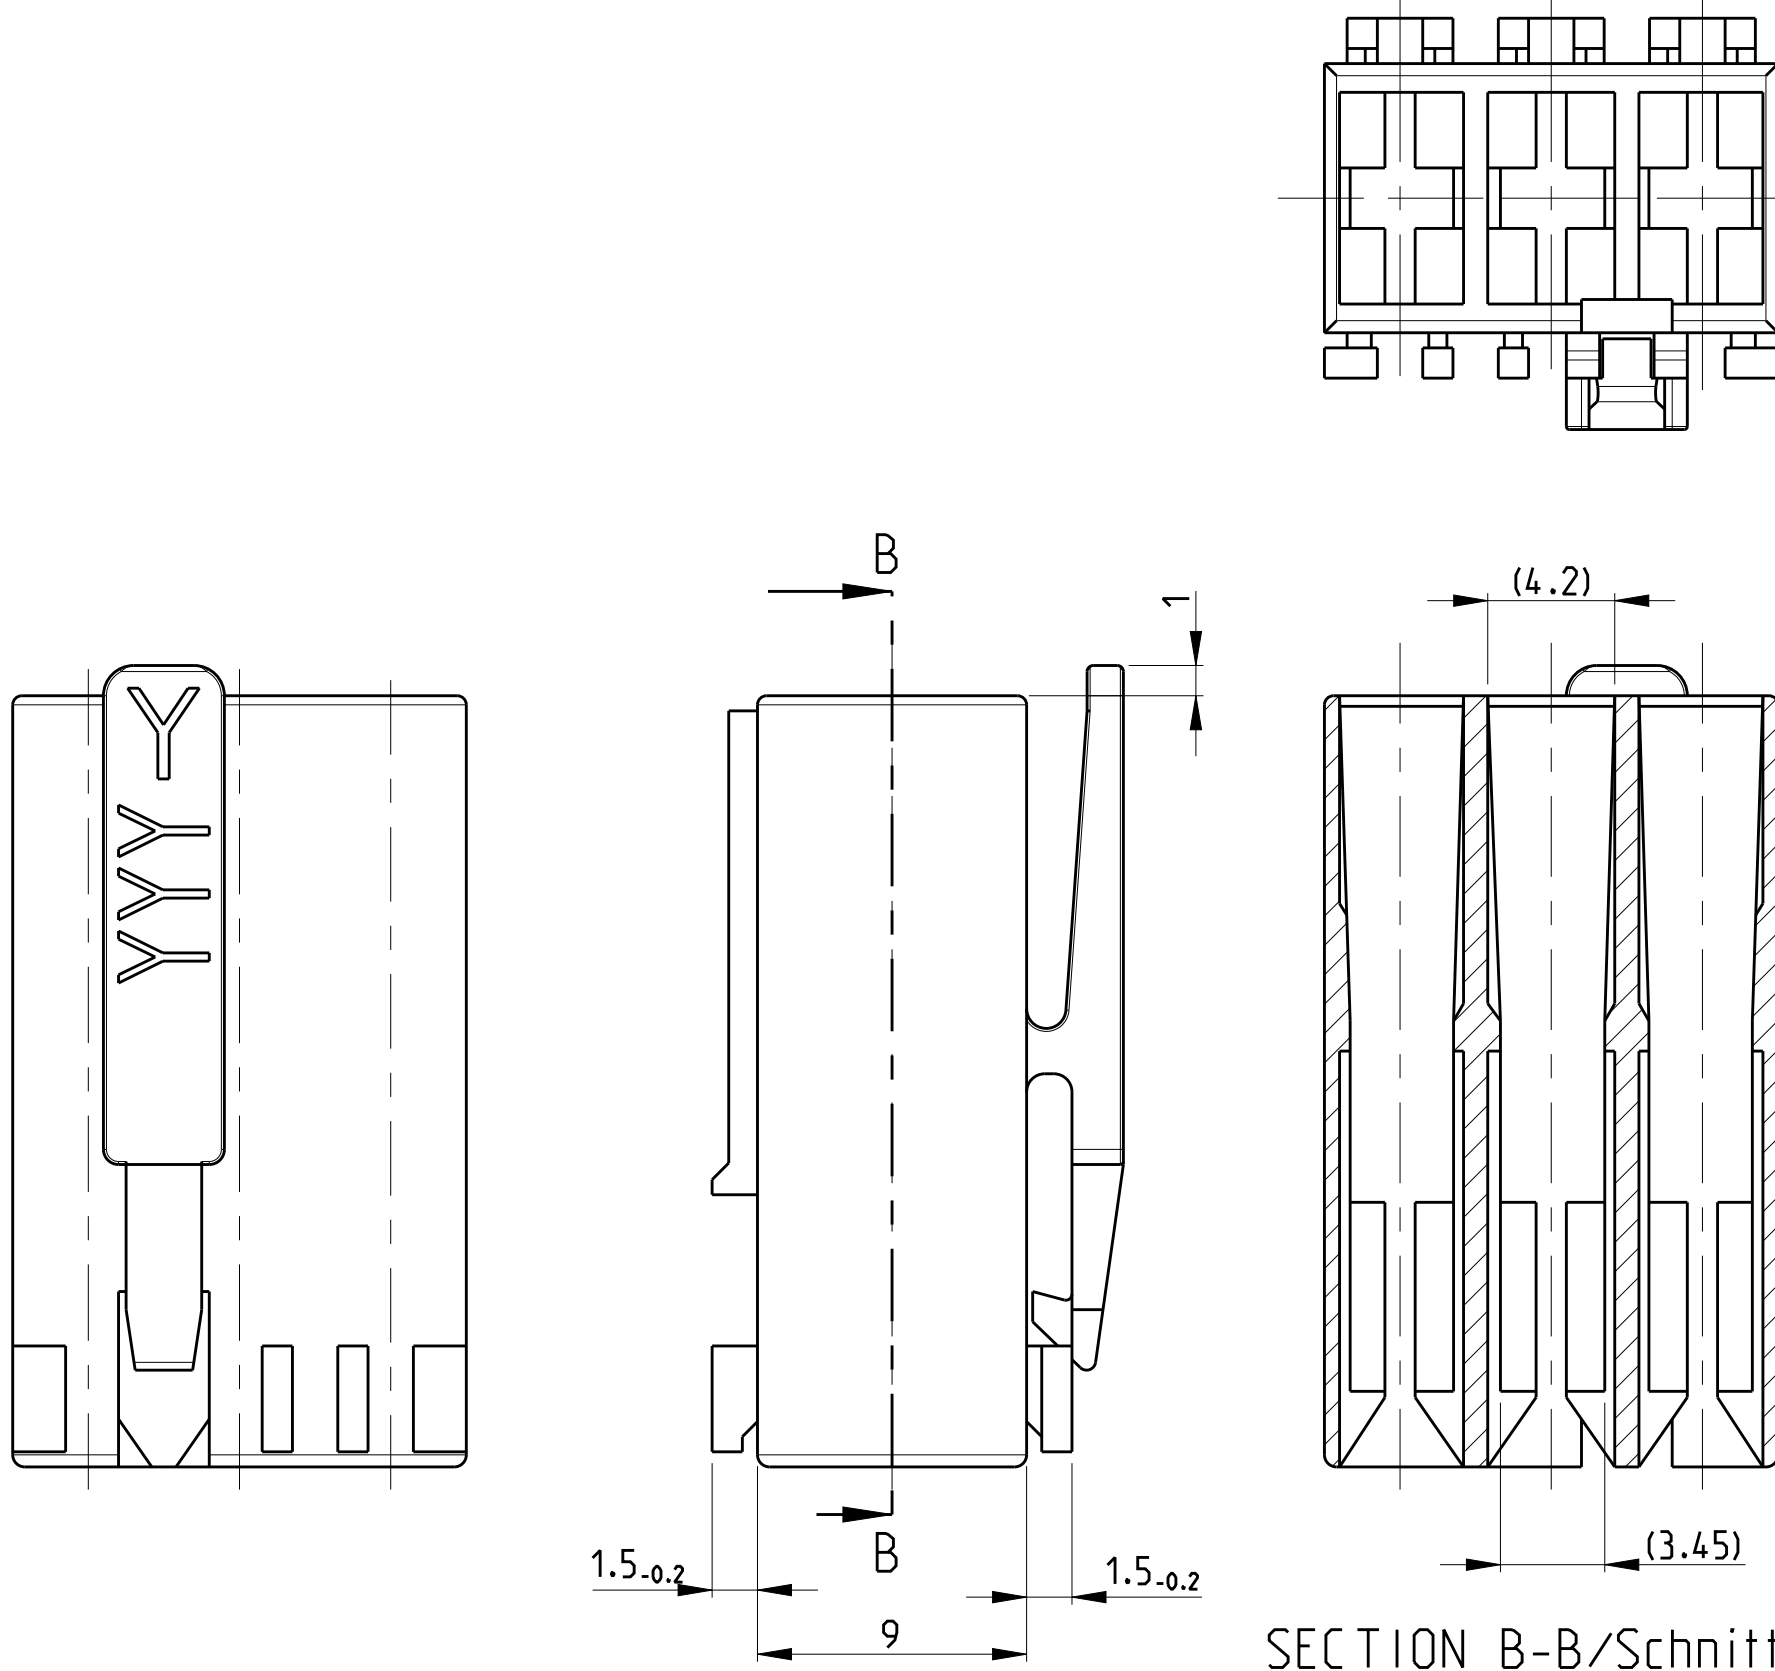

ALL OTHER DIMENSIONS SEE SHEET 1 OF 3
Alle anderen Masse siehe Seite 1 von 3


SPECIAL MATERIAL: UL94 VO								
2345753-1	3	6	1	15	10	PA66	NATURAL	1

SPECIAL MATERIAL								
1955507-4	4	6	1	20	15	PA66 UL 94 VO	NATURAL	1
9-1955506-2	2			10	5		NATURAL	1


6-1241961-7	3	4	0.5	15	10	PA 6 UL94V-2	NATURAL	1
4-1241961-7	3			15	10	PA 6 UL94V-2	NATURAL	A
3-1241961-7	3			15	10	PA 6 UL94V-2	NATURAL	A
1-1955422-7	3			15	10	PA 66 UNFILLED UL94 VO	NATURAL	A
5-1955422-7	3	6	1	15	10	PA 66 UNFILLED UL94 VO	NATURAL	A
4-1955422-3	2			10	5	PA 66 UNFILLED UL94 VO	NATURAL	A
2-1241817-3	3			15	10	PA 66 UL94 V-2	Green	E
0-1955422-6	3			15	10	PA 66 UNFILLED UL94 VO	NATURAL	A
8-1241961-8	3	4	0.5	15	10	PA 6 UL94V-2	natural	C
0-1241961-8	3			15	10			A
8-1241961-3	2			10	5			C
3-1241961-1	2			10	5	PA 6 UL94V-2	NATURAL	C
0-1955422-1	2	6	1	10	5	PA 66 UNFILLED UL94 VO	NATURAL	A
PART NO	POS	DIM C	DIM D	DIM A	DIM B	MATERIAL	COLOUR Farbe	REV./Rev.

LOC		DIST		P		LTR		DESCRIPTION		DATE		DWN		APVD		
								SEE SHEET-01								
0-1241959-5	5	4	0.5	25	20	PA 6	UL94V-2	13	Natural/natur					B		
4-1241959-4	4			20	15									A		
2-1241959-4	4			20	15									B		
0-1241959-4	4			20	15											
2-1241817-5	5	6	1	25	20	PA 6.6	UL94V-2		Natural/natur							
0-1241817-5		4	0.5	25	20				Black/schwarz							
3-1241817-4	4	6	1	20	15				Violet/violett	C						
2-1241817-4		6	1	20	15	Grey/grau										
0-1241817-4		4	0.5	20	15	Natural/natur										
2-1241983-2	2	4	0.5	10	5	PA 6	UL94V-2	13	Green/grün							
1-1241983-2				10	5				Violet/violett							
0-1241983-2				10	5				TARGET RAL 4001							
8-1241983-2				10	5				Yellow/gelb							
5-1241983-3				10	5				Black/schwarz							
6-1241983-2				10	5				Blue/blau							
				Red/rot												
9-1241961-7	3	4	0.5	15	10	PA 6	UL94V-2	13	Natural/natur							
9-1241961-8		4	0.5	15	10											
6-1241961-8		4	0.5	15	10											
5-1241961-8		4 or 6	0.5 or 1	15	10											
4-1241961-8		4	0.5	15	10											
7-1241961-8		4	0.5	15	10											
1-1241961-8		4 or 6	0.5 or 1	15	10											
3-1241961-8		6	1	15	10											
2-1241961-8				15	10											
2-1241961-7				15	10											
1-1241961-7	4	0.5	15	10	PA 6	UL94V-2	13	Natural/natur								
9-1241961-9			15	10												
0-1241961-6			15	10												
3-1241961-3			10	5												
2-1241961-2			10	5												
5-1241961-2			10	5												
4-1241961-3			10	5												
7-1241961-2			10	5												
7-1241961-3			10	5												
6-1241961-3	2	4	0.5	10										5		
3-1241961-2				10	5											
5-1241961-3				10	5											
6-1241961-2				10	5											
0-1241961-3				10	5											
8-1241961-2				10	5											
9-1241961-2				10	5											
0-1241961-1				10	5											
						10	5									
						10	5									
9-969484-9	3	6	1	15	10	PA 6.6	UL94V-2		Yellow/gelb							
2-969484-8															15	10
4-969484-8				15	10											
0-969484-8				4 or 6	0.5 or 1										15	10
9-969484-7				15	10											
8-969484-7				4	0.5										15	10
7-969484-7				15	10											
6-969484-7															15	10
5-969484-7				4	0.5											
4-969484-7															15	10
3-969484-7				4	0.5											
2-969484-7															15	10
1-969484-7	3	4	0.5	15	10											
0-969484-7															15	10
9-969484-6				15	10											
8-969484-6				6	1										15	10
7-969484-6				15	10											
6-969484-6															15	10
5-969484-6				15	10											
4-969484-6															15	10
3-969484-6				15	10											
2-969484-6				6	1										15	10
4-969484-6				15	10											
0-969484-6															15	10
7-969484-3				10	5											
6-969484-3				4	0.5										10	5
5-969484-3				10	5											
4-969484-3															10	5
3-969484-3				10	5											
2-969484-3															10	5
1-969484-3				10	5											
0-969484-3															10	5
9-969484-2				10	5											
8-969484-2				4	0.5										10	5
7-969484-2				10	5											
6-969484-2															10	5
5-969484-2				10	5											
4-969484-2															10	5
3-969484-2				10	5											
2-969484-2															10	5
1-969484-2				10	5											
0-969484-2				6	1										10	5
9-969484-1				10	5											
8-969484-1				4	1										10	5
7-969484-1				10	5											
6-969484-1				6	1										10	5
5-969484-1				10	5											
4-969484-1				6	1										10	5
3-969484-1				10	5											
2-969484-1				4	0.5										10	5
1-969484-1				10	5											
0-969484-1															10	5
PART NO	POS.	DIM C	DIM D	DIM A	DIM B	MATERIAL	COLOUR	REV								
		12	12	12	12											
THIS DRAWING IS A CONTROLLED DOCUMENT.						DWN: Kishor M 18-10-07										
DIMENSIONS:						CHK: K. Muniz 18-10-07										
TOLERANCES UNLESS OTHERWISE SPECIFIED:						APVD: Th. Kienner 18-10-07										
mm						NAME										
0 PLC ±0.2						STANDARD TIMER HSG. RAST 5 MARK II										
1 PLC ±0.2						Standard Timer Gehaeuse RAST 5 Mark I										
2 PLC ±0.2						PRODUCT SPEC										
3 PLC ±0.2						108-180/9										
4 PLC ±0.2						APPLICATION SPEC										
ANGLES						-										
FINISH						WEIGHT										
SEE TABLE						-										
SHEET 2 OF 3						Customer Drawing										
						SCALE										
						5:1										
						SHEET										
						2 OF 3										
						REV										
						4										

SEE SHEET-01

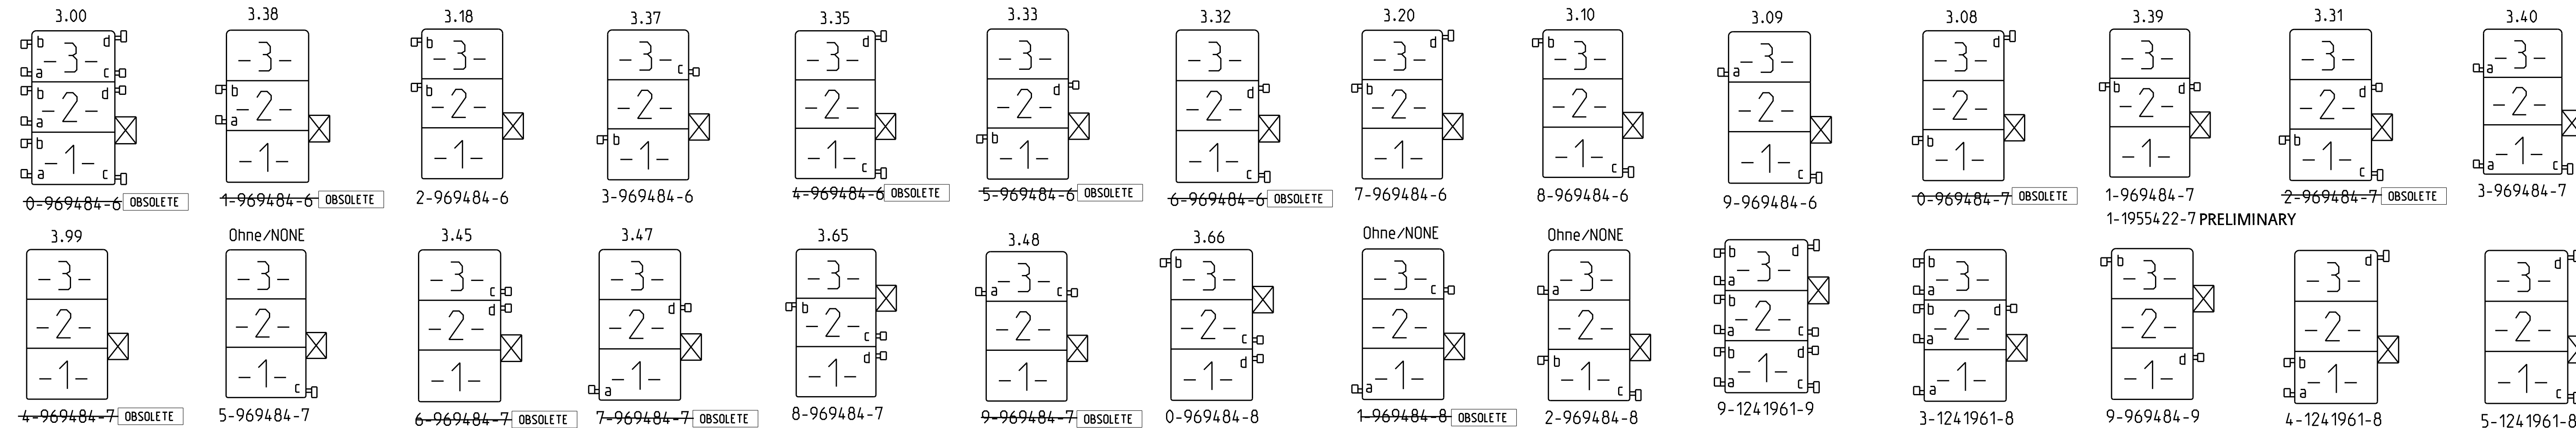

5 POSITION VARIANTS

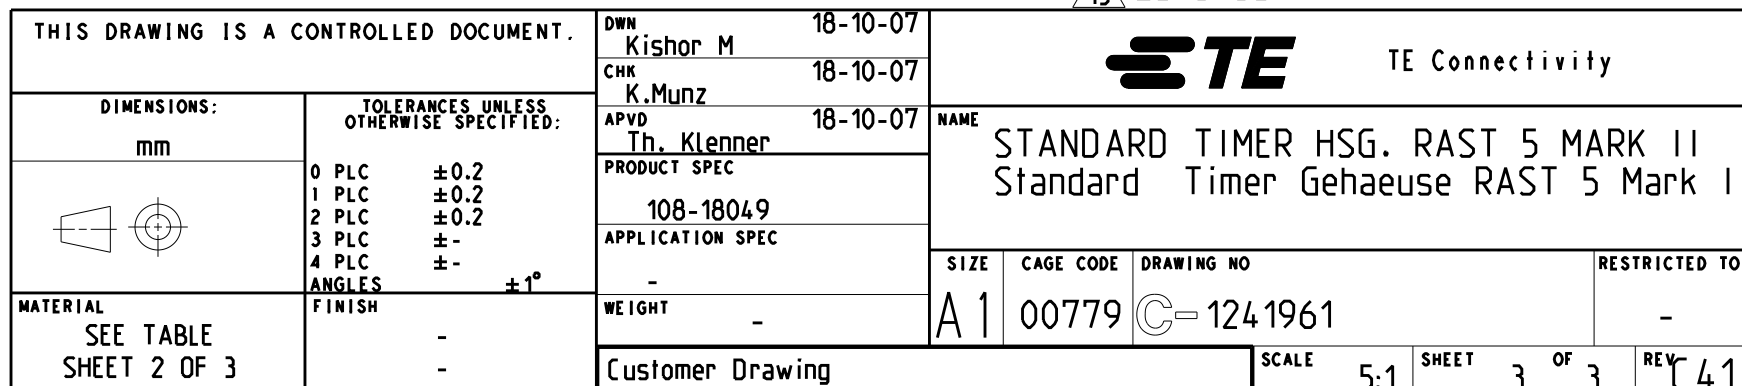

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-1241983-2](#)